


Lifter Jibs

Lift items from the ground to van floor height, then rotate into cargo area. Hand winch, DC battery powered, and AC electrically powered winches are available. AC powered winch has a lift speed of 10 ft. per minute and DC powered at 7 ft. per minute at full capacity load. AC powered winch includes toggle switch. DC powered winch includes a pendant control. Battery powered winch includes 36" long leads. Battery not included. Van floor to raised hook height is 36 $\frac{1}{8}$ ". Double-pivot arm for use in tight spaces. Overall height is 46 $\frac{1}{16}$ ". Swing reach is 0" to 39 $\frac{3}{4}$ ". Steel construction. Painted finish. Unit is designed for vertical lifting only. Do not use unit for lifting personnel or overhead lifting.

MODEL NUMBER	DESCRIPTION	OVERALL CABLE LENGTH	UNIFORM CAPACITY	WEIGHT (POUND)
VAN-J	HAND WINCH	10 ft.	400 lb.	137
VAN-J-DC*	DC POWERED	46 ft.	400 lb.	145
VAN-J-AC	AC POWERED	25 ft.	400 lb.	275
WINCH-AC-HHPB	UPGRADE AC WINCH W/HANDHELD PUSH BUTTON CONTROL (THIS OPTION REPLACES STANDARD FINGERTIP SWITCH ON AC WINCHES)			5

*VAN-J-DC INCLUDES BATTERY-POWERED WINCH WITH 46 FEET OF CABLE

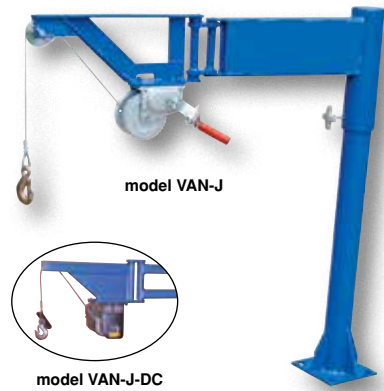

Shop Crane Engine Hoists

These portable units are great for hundreds of lifting applications. Telescopic boom for multiple lifting heights and capacities. Boom is raised and lowered with a manual hydraulic hand pump. The high-capacity hydraulic cylinder provides faster lifting action and features a large diameter ram to withstand angled loads when lifting. Includes two (2) rigid and two (2) swivel casters for portability. Heavy-duty steel construction and painted finish.

MODEL NUMBER	UNIFORM CAPACITY	BOOM LENGTH	BOOM HEIGHT	WEIGHT (POUND)
FOLDING DESIGN FOR STORAGE (33½"W x 44"L x 60½"H) -- (FOLDABLE LEGS)				
EHN-20-C	2,000 lb.	36⅝"	20½" to 76"	207
	1,500 lb.	40"	17½" to 78"	
	1,000 lb.	43¾"	14½" to 80"	
	500 lb.	47"	10½" to 82"	
EHN-40-C	4,000 lb.	39¼"	21" to 85¾"	238
	3,000 lb.	46¼"	15" to 91¼"	
	2,000 lb.	53¼"	9" to 96⅞/16"	
	1,000 lb.	60½"	3" to 102"	
FIXED - WILL NOT FOLD FOR STORAGE -- (TELESCOPIC LEGS)				
EHN-40-T	4,000 lb.	49"	8⅞" to 72"	277
	3,000 lb.	58"	3½" to 77"	
	2,000 lb.	67"	0" to 82"	
	1,000 lb.	76"	0" to 87"	
EHN-60-T	6,000 lb.	51⅞"	22" to 84"	354
	4,000 lb.	60"	16⅞/16" to 88⅜/16"	
	3,000 lb.	68"	11½" to 92⅜/8"	
	2,000 lb.	76¼"	6¼" to 96⅞/16"	



Air/Hand Pump Hydraulic Shop Crane

This crane allows one person to maneuver product from location to location, and then lift it with everyday factory air. If air is temporarily unavailable, lift product with the hand pump hydraulic option. Air raises unit 7" to 8" per second. Hand pump raises units $\frac{1}{2}$ " per stroke. Units roll on 3 $\frac{1}{2}$ " x 1 $\frac{1}{4}$ " cast steel casters, (4) swivel in back (2) swivel in front. The hoist offers heavy-duty lifting power, while optimizing space when in the folded position. Standard features: foldable legs, adjustable boom, swivel hook, and steel construction.

MODEL NUMBER	UNIFORM CAPACITY	REACH	MAXIMUM HEIGHT	MINIMUM HEIGHT	WEIGHT (POUND)
FOLDED SIZE: 33$\frac{1}{2}$"W x 44"L x 60$\frac{1}{2}$"H					
EHN-40-C-AH	4,000 lb.	39"	86"	21"	249
	3,000 lb.	46"	91"	15"	
	2,000 lb.	53"	97"	9"	
	1,000 lb.	61"	102"	3"	

