

Trailer Stabilizing Jacks

Jacks are used to prevent up-ending of semi-trailers when they are not connected to a tractor during loading and unloading operations. Also used to level trailers parked on sloped ground and to prevent landing gear from sinking into a soft surface. High strength steel construction. Flush-type zerk fitting for lubricating ACME screw. Meets OSHA regulations when used with wheel chocks. Baked-in powder-coated toughness. Includes reflective collar for visibility at night.



model SJS-1012


model SAJ-1012

TYPE	MODEL NUMBER	DESCRIPTION	UNIFORM STATIC CAPACITY	UNIFORM LIFTING CAPACITY	SERVICE RANGE	WHEEL SIZE & TYPE	WEIGHT (POUND)	
A	BFSJ-2748	BIG FOOT JACK	100,000 lb.	40,000 lb.	39½" to 51"	10" hard rubber	162	
B	LO-J-BEAM	RATCHET BEAM	100,000 lb.	40,000 lb.	40" to 51"	10" x 2" hard rubber	182	
C	SP-TOP-BEAM	SPIN TOP BEAM	100,000 lb.	40,000 lb.	40" to 51"	10" x 2" hard rubber	200	
D	H-LO-J-BEAM	HYDRAULIC BEAM	100,000 lb.	40,000 lb.	41" to 47"	10" x 2" hard rubber	192	
E	CJ-BEAM-SN	HAND CRANK	100,000 lb.	50,000 lb.	41" to 55"	16" solid foam	238	
E	CJ-BEAM-PN	HAND CRANK	100,000 lb.	50,000 lb.	41" to 55"	16" fully pneumatic	221	
		CJ-BEAM-RHDL			OPTIONAL RATCHET HANDLE FOR BETTER ERGONOMICS FOR CJ-BEAM JACKS		8	
F	SJ-40	ECONOMY (flat base)	50,000 lb.	5,000 lb.	44" to 51"	N/A	44/UPS	
G	LO-J	RATCHET	100,000 lb.	40,000 lb.	39" to 51"	10" hard rubber	137	
H	HI-J	RATCHET	100,000 lb.	40,000 lb.	45" to 57"	10" hard rubber	141	
I	SP-TOP	SPIN TOP	100,000 lb.	40,000 lb.	39½" to 51"	10" hard rubber	129	
J	SP-TOP-R	RATCHET	100,000 lb.	40,000 lb.	39" to 51"	10" hard rubber	138	
K	SJ-35	ECONOMY (rounded base)	50,000 lb.	5,000 lb.	44" to 51"	N/A	39/UPS	
L	SJ-35-2H	ECONOMY	50,000 lb.	5,000 lb.	44" to 51"	N/A	39/UPS	
M	SJ-35-EF	ECONOMY	50,000 lb.	5,000 lb.	41" to 57½"	8" hard rubber	57	
TRAILER STABILIZING JACK OPTIONS								
	SJS-1012	ALUMINUM STABILIZING JACK TRAILER INSTRUCTION SIGN						1
	SAJ-1012	ALUMINUM DRIVERS BEWARE INSTRUCTION SIGN						1

Mechanical Screw Jacks

Acme thread post supports load. No seals to leak. Will not drift down even after an extended period of time.

MODEL NUMBER	UNIFORM CAPACITY (TONS)	LOWERED HEIGHT	RAISED HEIGHT	TRAVEL (INCHES)	WEIGHT (POUND)
MSJ-3	3	8¾"	13"	4¼"	12
MSJ-5	5	9¾"	14¾"	5¼"	18
MSJ-10	10	11"	16 ¹³ / ₁₆ "	6"	20
MSJ-20	20	12¾"	19 ¹³ / ₁₆ "	7¼"	29

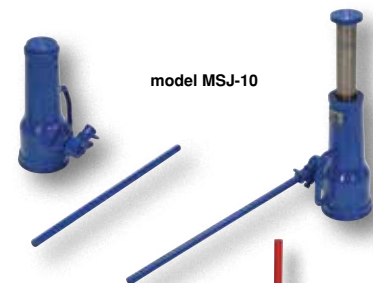

model MSJ-10

Heavy Duty Farm Jacks

Designed to lift, pull, push, and move heavy machinery and heavy objects. Ideal for lifting tractor and 4-wheel drive vehicles, tensioning wire fences, and pulling/pushing or removing posts, poles, tree stumps, etc. Hydraulic free, full lever mechanical operation. Solid cast iron construction. Heavy duty 33" ratchet operating lever provides maximum leverage.

MODEL NUMBER	UNIFORM CAPACITY (TONS)	LOWERED HEIGHT	RAISED HEIGHT	TRAVEL (INCHES)	WEIGHT (POUND)
HDFJ-48	3.5	6"	42"	36"	31
HDFJ-60	3.5	6"	53"	47"	36

