


1-877-7-GENNIE

INST10030

GENNIESHIFTER.COM

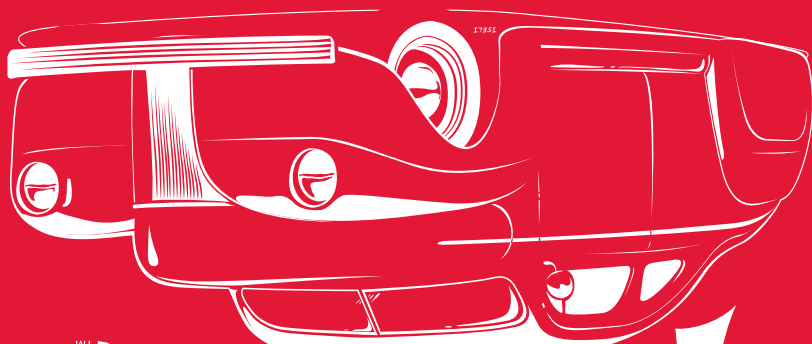

GENNIE SHIFTER

GENNIE  
INSTRUCTIONS



STILL THE BEST!

DENVER, COLORADO

1-866-623-1963

GENNIESHIFTER.COM

INST10030

1-877-7-GENNIE

## HEADLIGHT BAR INSTALLATION



### COMPONENT LIST FOR Headlight Bar

Component	Description	Quantity
BARS	Headlight Bar	1
BOLT10002	3/8 16 x 2 SS Flat Socket	2
STUD10001	Headlight Bar Stud SS	2

The fender mounting flanges on this headlight bar are built to conform to factory specs. The factory cast protrusions on the bottom of the mounting flanges have been eliminated to ease mounting.

The fender hole positions for mounting the headlight bar will vary considerably from car to car because of **distortion from frame boxing, variations in repo-fender braces, storing fenders on ground, and from re-worked or repo-fenders themselves.** Because of these variations most cars will require some adjustment and fitting when mounting a new headlight bar. **Do not modify the headlight bar, it is made to original factory specifications.**

A couple of helpful hints:

1. If the holes line up, but there is space under the fender, (between the fender brace and the underside of the fender) the fender will distort unless shims are placed in the gap before tightening, (shims can be made from masonite or a similar material)
2. If the fender wants to distort near the edge of the mounting flange due to a slight mis-alignment, wrap a short length of 50-50 solder around the bolts (between the flange and the fender) before tightening. This will take the load and help prevent unwanted distortion.

### READ THIS NOTICE

This product will be replaced if defective in manufacture or packaging. Except for such replacement, the sale or any subsequent handling of this product is without warranty or liability even though defect, damage, or loss is caused by negligence or other fault.

PLEASE CONSULT THE DEALER YOU PURCHASED THIS PRODUCT FROM.