




### INSTALLATION PROCEDURE

1. Find the bolt that attaches the end of the belt webbing for the front seat belts to the body. When you open either one of the front doors, it is directly on the top of the wheel arch, outboard of each front seat.
2. Install the inertia reel supplied for the jump seat by removing this bolt and the belt-end it attaches.
3. Bolt the 3" long extension plate to the inertia reel, as shown in the figure below.

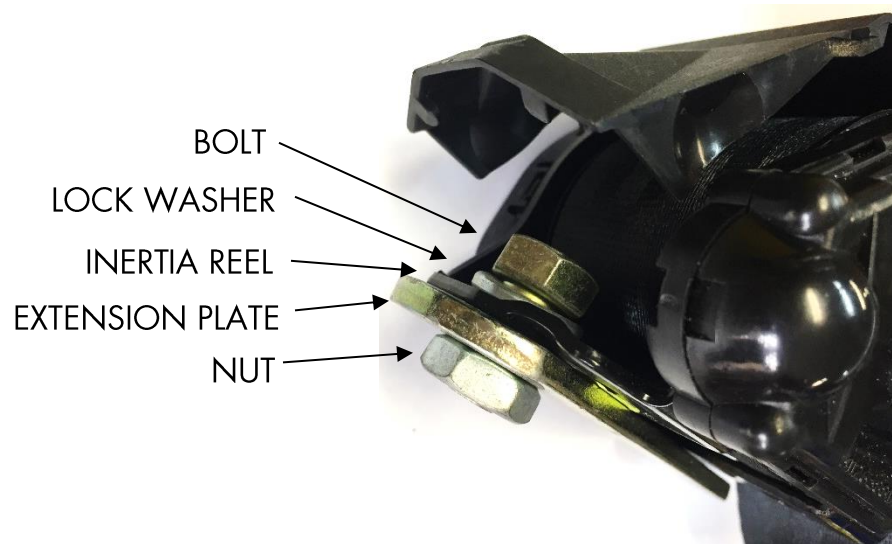

4. Orient the extension to angle inboard with the reel pointing straight back so that the webbing exits smoothly around the jumpseat. Be sure to check for door clearance against the reel. Once the extension and reel are properly arranged, mark the angle of the reel on the extension and torque both bolt/nut connections to 45 ft.-lbs.
5. Bolt the open end of the extension over the top of the front seat belt end using the stock bolt, as shown below.





These instructions and the images herein are proprietary. Any unauthorized reproduction is prohibited.


KT122J

## 3-Point Retracting Seat Belt - Jumpseat LH/RH for Vanagon

6. Find the extra shoulder anchor point for the front belts. It is located about 3 inches below the existing shoulder anchor point currently being used for the front seat. There should be a plastic Phillips head bolt in the hole acting as a plug.



7. Remove the threaded plastic plug, and install the new belt-end (of the webbing coming from the reel) to that hole using the hardware provided, as shown below.

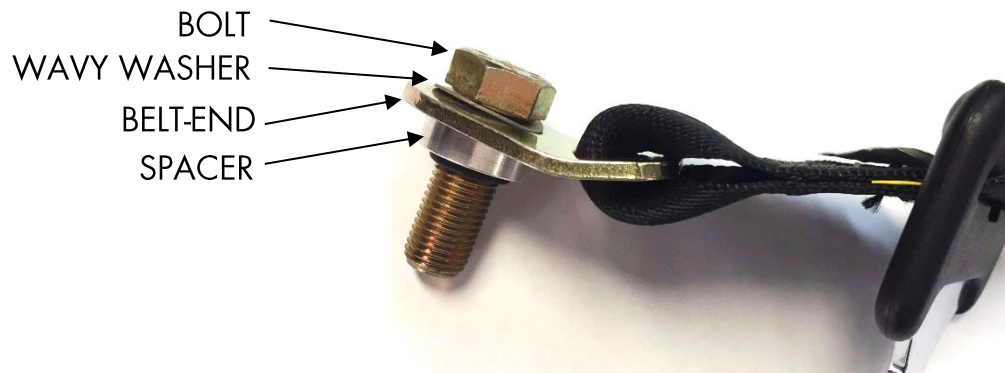

The female half of the old belt is re-used. The existing lap-only inertia reel attached to the jump seat can be left in place or removed.



**THAT'S IT; YOU'RE DONE. GO FOR A RIDE!  
DON'T FORGET TO BUCKLE UP!**