




2 Humbucker 2 Volume, 3 Tone Wiring Diagram

Diagram for CG-BFH6A

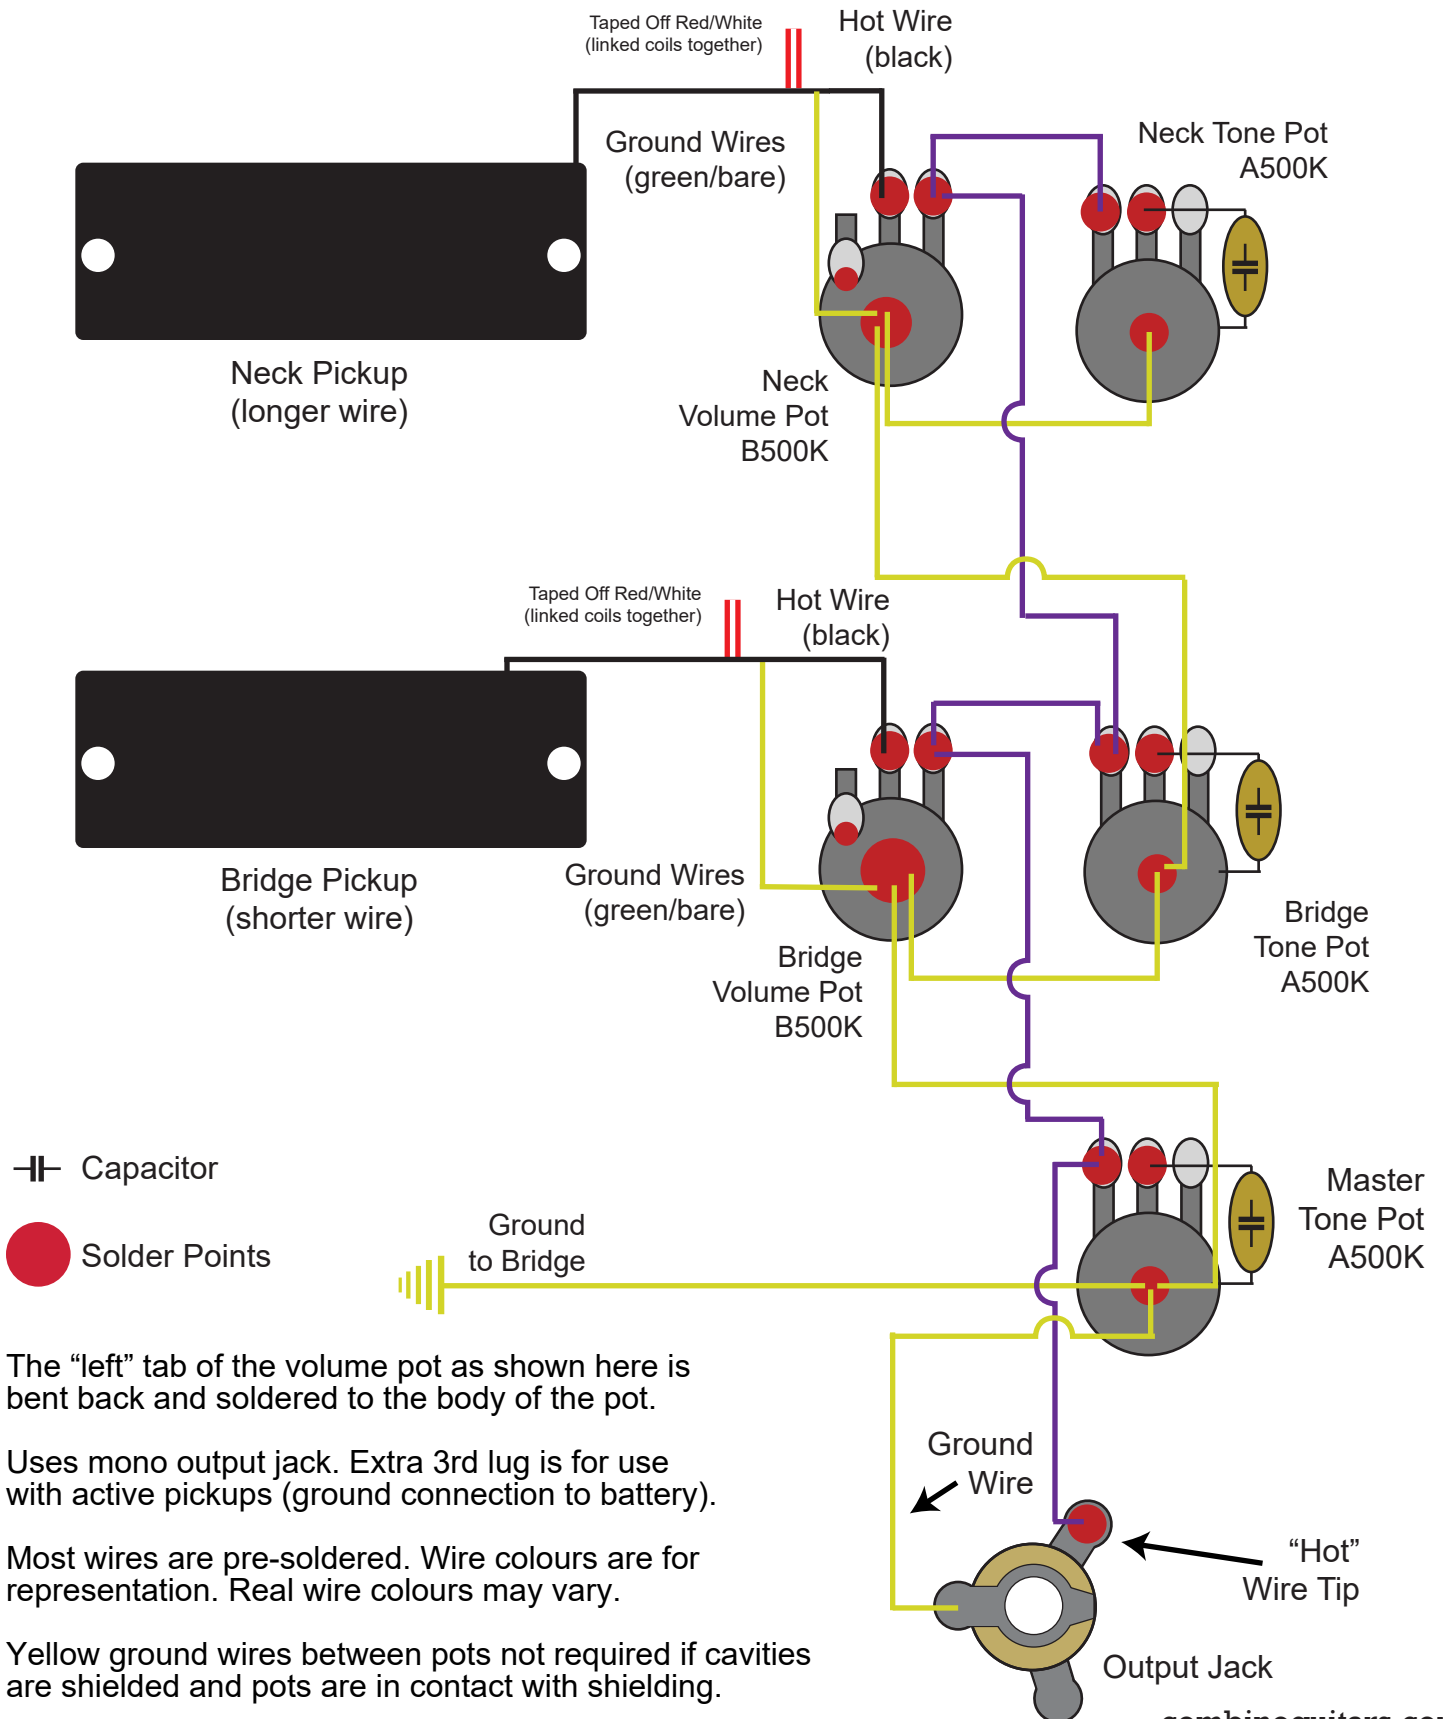

The "left" tab of the volume pot as shown here is bent back and soldered to the body of the pot.

Uses mono output jack. Extra 3rd lug is for use with active pickups (ground connection to battery).

Most wires are pre-soldered. Wire colours are for representation. Real wire colours may vary.

Yellow ground wires between pots not required if cavities are shielded and pots are in contact with shielding.