


Diagram for CG-GTC6A

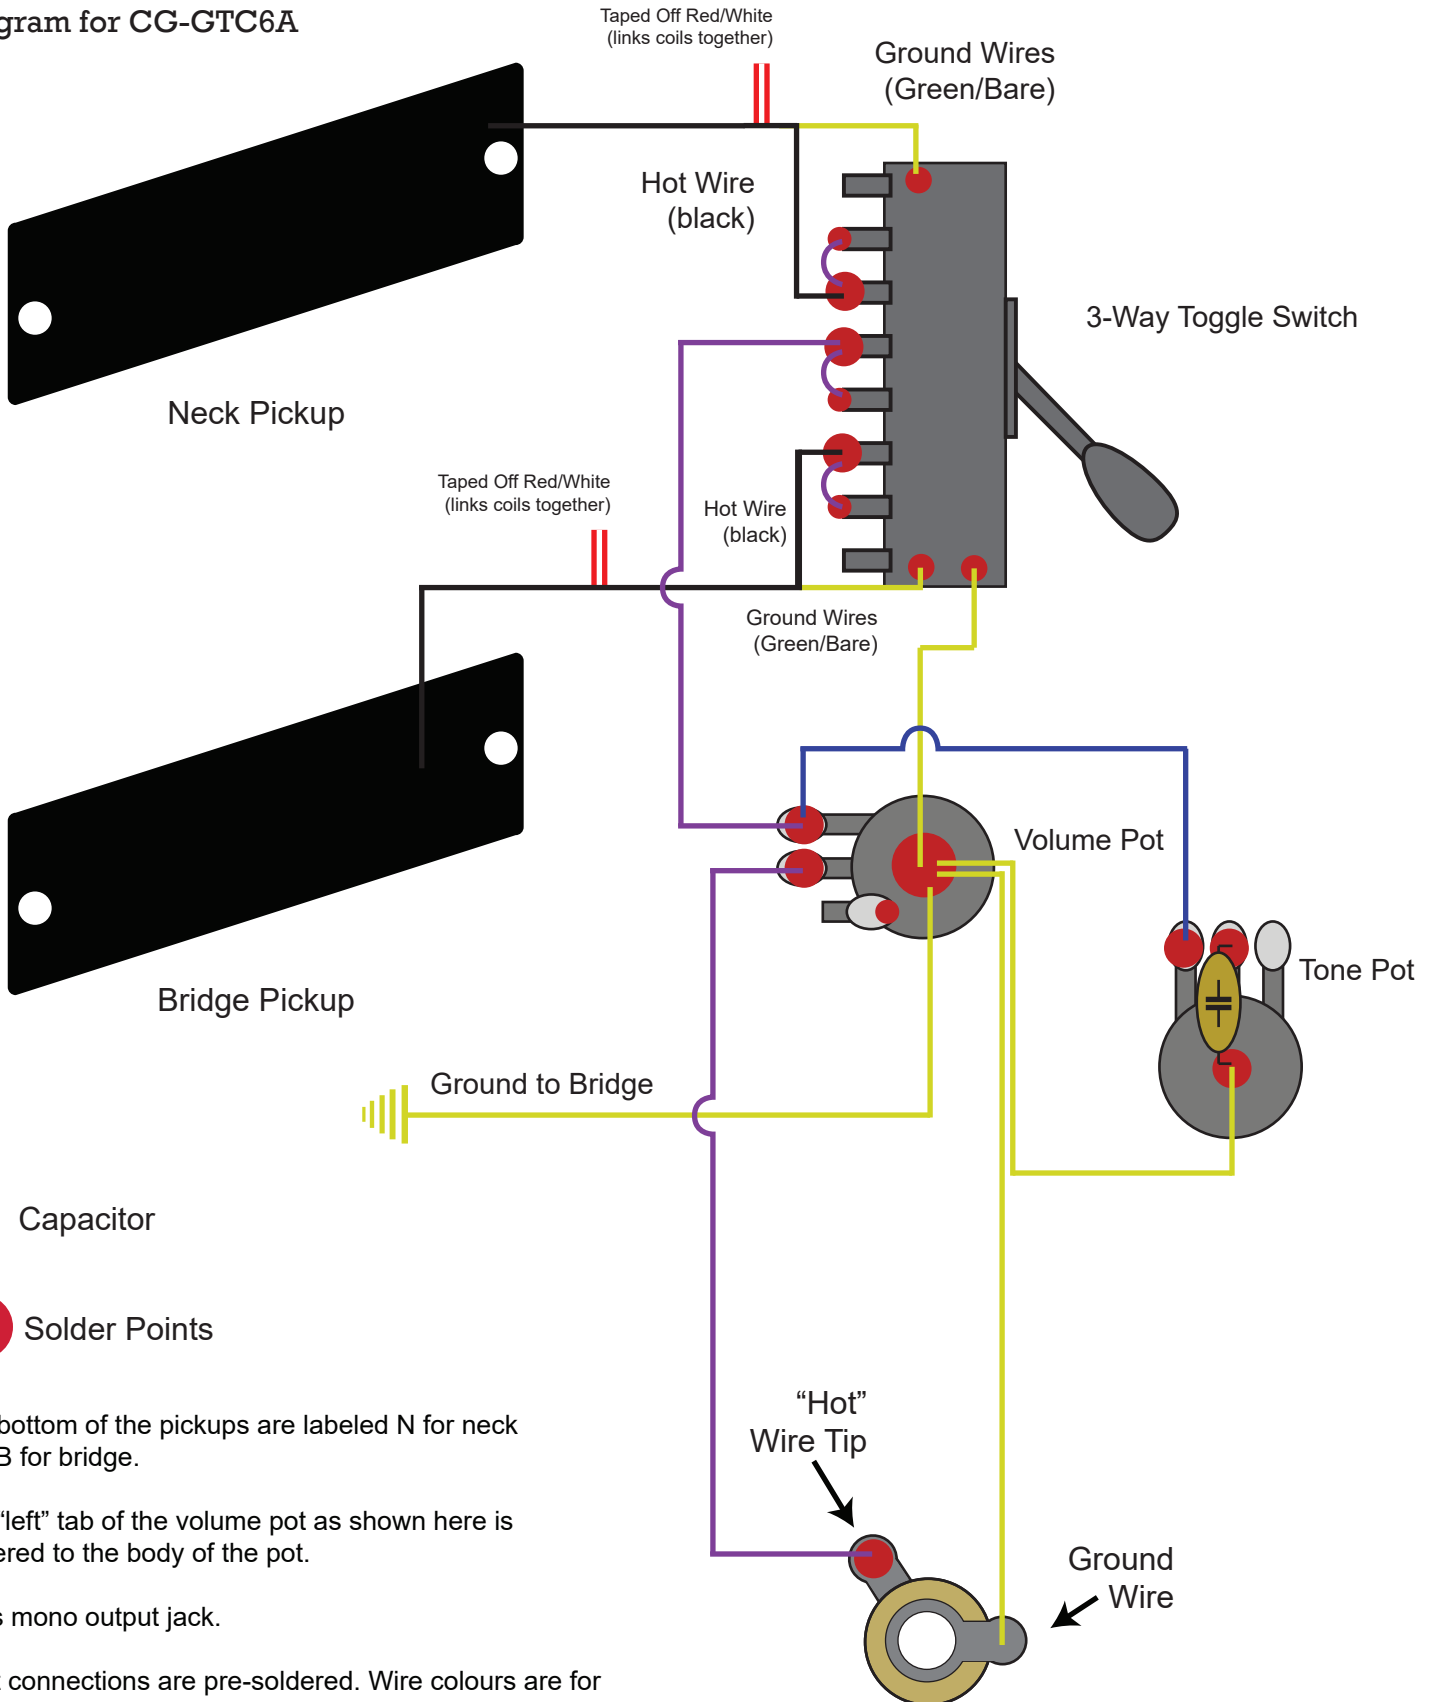

Capacitor

Solder Points

The bottom of the pickups are labeled N for neck and B for bridge.

The "left" tab of the volume pot as shown here is soldered to the body of the pot.

Uses mono output jack.

Most connections are pre-soldered. Wire colours are for representation. Real wire colours may vary.