

# 11' Mod-SM-Long-11 - Specification Sheet

## Features

- Dimmable LED task lighting
- Energy efficient LED lighting 5000K
- 6360 Lumens
- CRI 90+
- Integrated Defogger

## Construction

- Quality polished edge mirror
- Single phase wire installation, silver backed, copper free
- Construction for surface mounting
- Includes installation hardware



## Codes/Standards Applicable

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

## Electrical System

### Mod1836L:

- 120Vac, 60Hz, 34W
- Electric Current: 0.28A
- Wattage: 34W

### Mod4836Center:

- 120Vac, 60Hz, 58W
- Electric Current: 0.48A
- Wattage: 58W

### Mod4836Center:

- 120Vac, 60Hz, 58W
- Electric Current: 0.48A
- Wattage: 58W

### Mod1836R:

- 120Vac, 60Hz, 34W
- Electric Current: 0.28A
- Wattage: 34W

## Model

- 11' Mod-SM-Long-11
- Combo of:
 

MODULAR 1836 Left LED Mirror	MODULAR 4836 Center LED Mirror
MODULAR 4836 Center LED Mirror	MODULAR 1836 Right LED Mirror

# 11' Mod-SM-Long-11 - Specification Sheet

## Dimensions

### Mod1836L:

- Height: 36"
- Width: 18"
- Depth: 1-9/16"

### Mod4836Center:



- Height: 36"
- Width: 48"
- Depth: 1-9/16"

### Mod4836Center:

- Height: 36"
- Width: 48"
- Depth: 1-9/16"

### Mod1836R:

- Height: 36"
- Width: 18"
- Depth: 1-9/16"

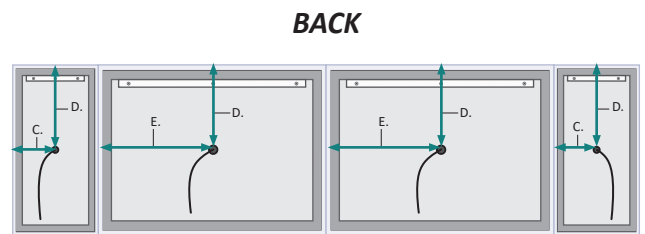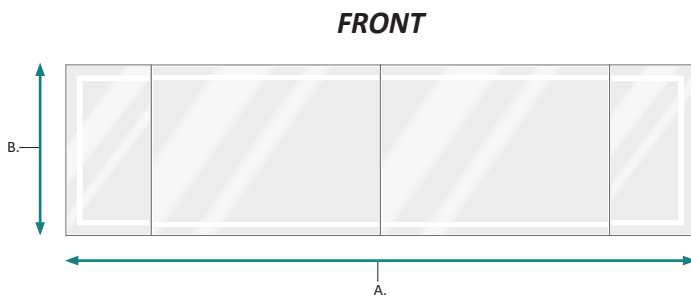

### FRONT, BACK & SIDE

MODEL	A	B	C	D	E	F	G
11' Mod-SM-Long-11	132	36	8-13/20	17-7/8	23-7/8	1-3/8	3/16