

Signature Royale - SR-3630 - Specification Sheet

Features

- 3D LED Color Temperature Lights with Dimmable touch control
- Mirrored interior with 3 adjustable glass shelves
- Includes Digital Clock
- Includes Defogger with push button
- Includes one USB outlet
- · Includes installation hardware for recess mounting
- Can be recessed or surface mounted (surface mounting is included)
- Interior Light with sensor switch
- Energy efficient LED lighting:
- Integrated LED 3X Magnifying Mirror

Kelvin	3000	6500	4500 mixed color
CRI	80+	80+	80+
Lumens*†	810	810	1620
R9 Value*	50+	50+	50+
Watts (AC)	60	60	60
Lumens per Watt	90	90	90

Construction

- Grey aluminum body and door frame
- 3 mirror design rear of cabinet and both sides of door
- Concealed finger pull-door edge
- Two pieces DTC 155° self-closing hinges for each door
- Adjustable shelving at 2-1/3" (60 mm) increments
- · Single field wire into electrical shelf Front access serviceability

Codes/Standards Applicable

Electric Option Models are ETL certified to:

- UL 962
- CSA Standard C22.2 No. 68


Dimensions

Height: 30" (762 mm)
Width: 36" (914.4 mm)

Depth: 5" (127 mm) When surface mounted

1" (25 mm) When recessed



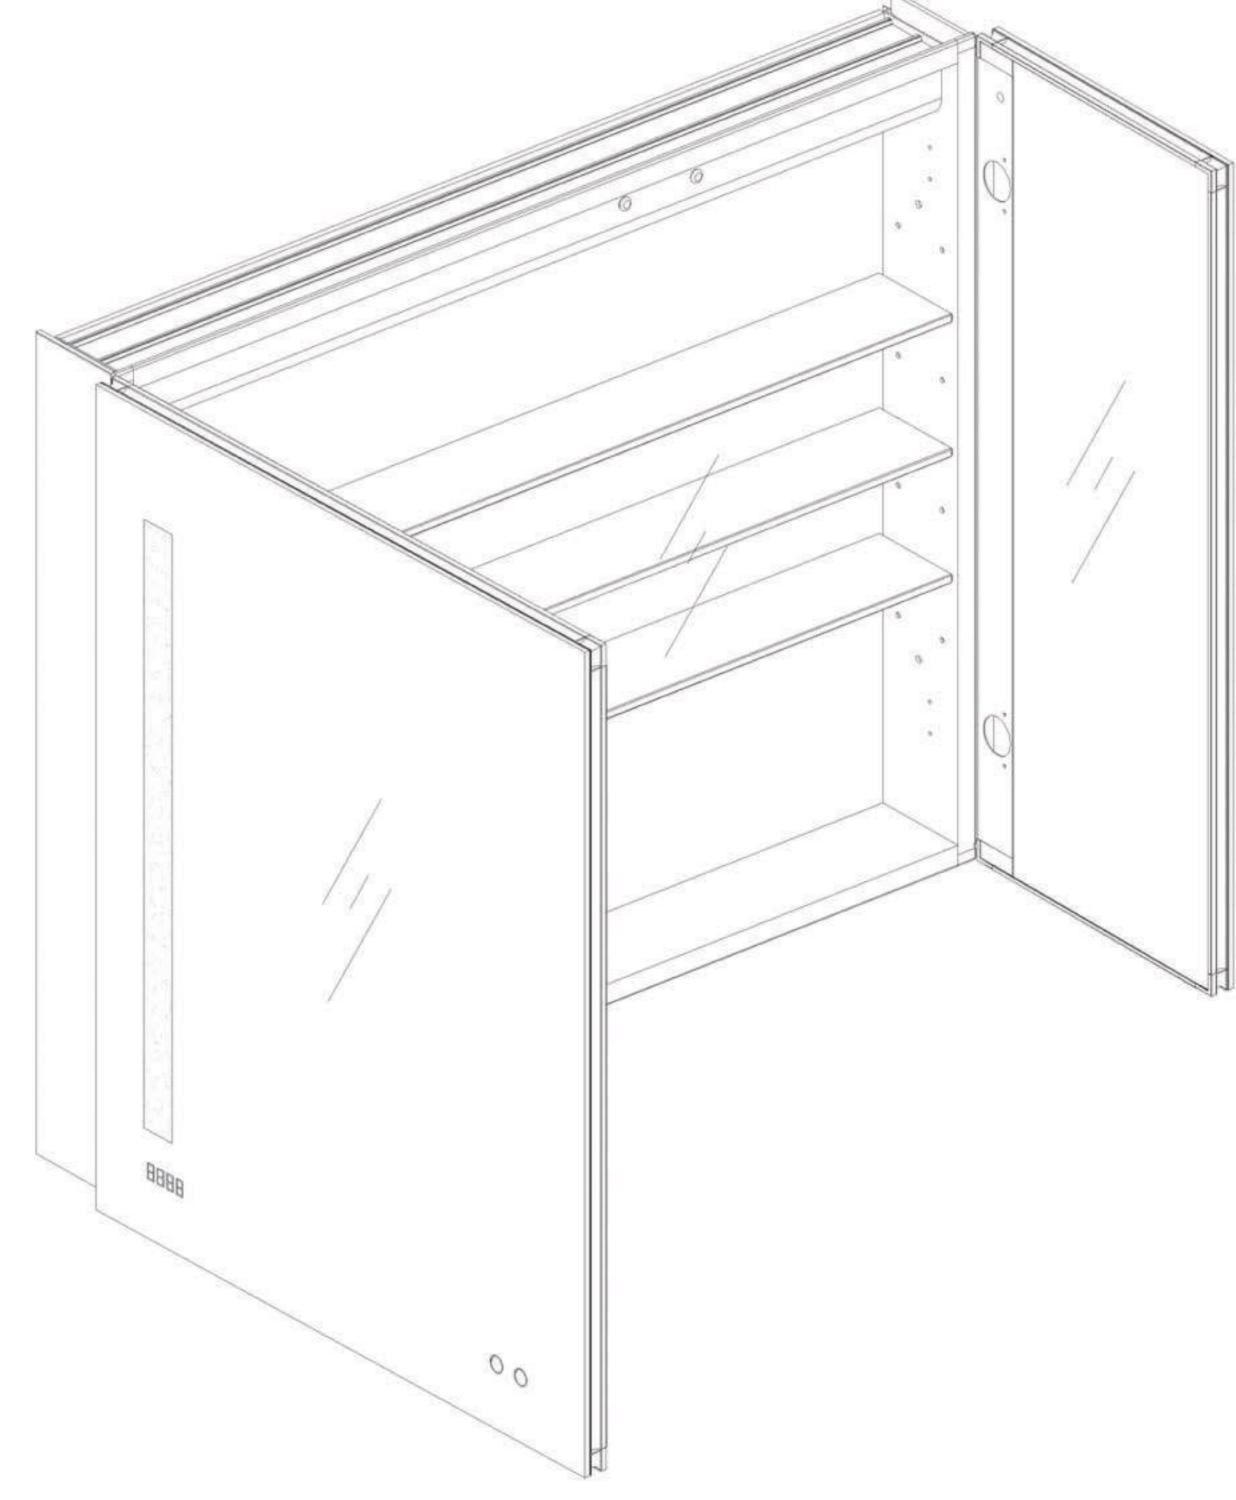


Installation Options


- Recessed Mount Rough Opening 29-1/2" H x 35-1/2" W x 4" D
 (749mm H x 902mm W x 102mm D)
- Surface Mount Surface Mount Kit is included

Electrical System


- 60 Watts LED Driver
- INPUT: 120VAC 60HZ 1.2A
- OUTPUT : 12VAC 5.0A
- Field wire location as shown in drawing
- 1/2" conduit (Ø 7/8" actual) electrical knockout location shown below
- Included field wire cable clamp
- Circuit Diagram

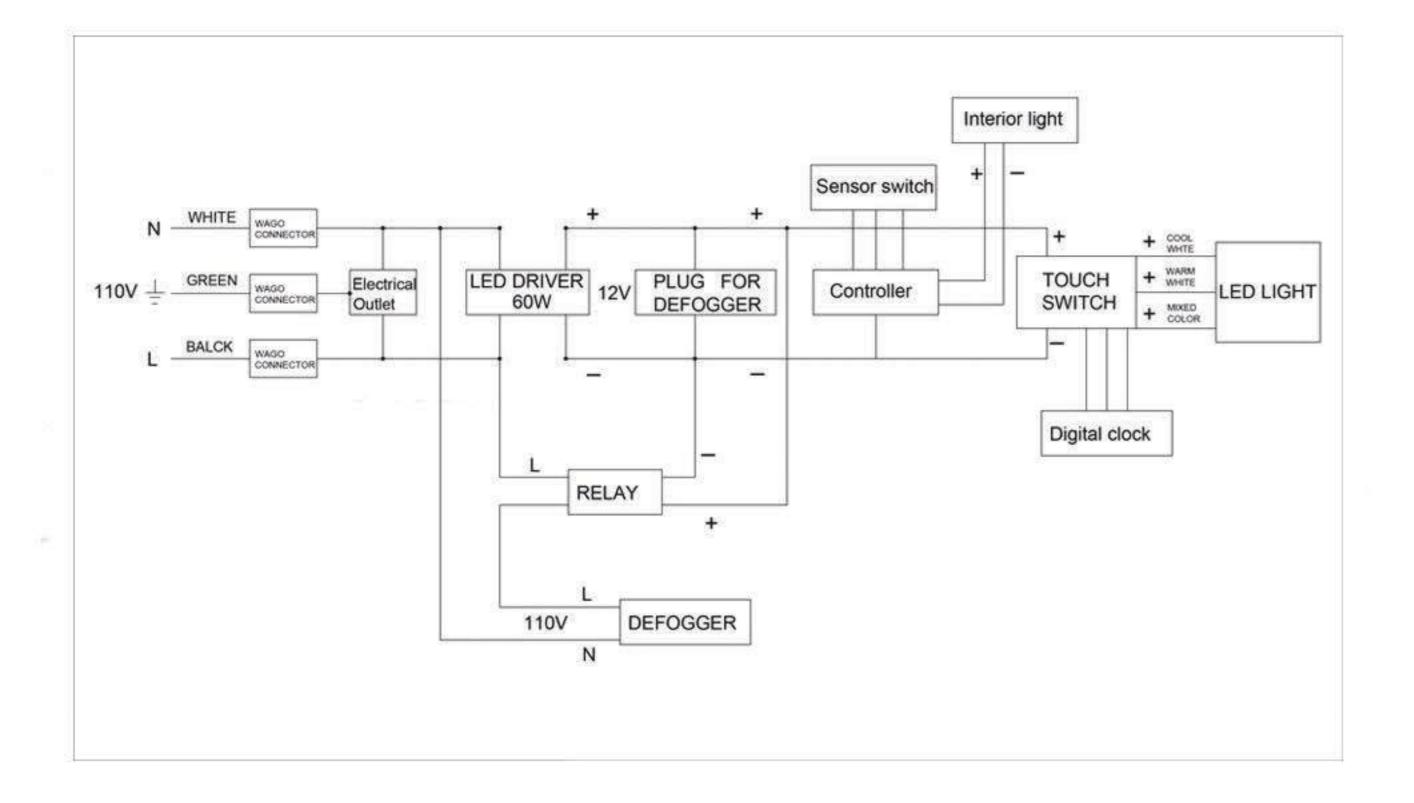


Circuit Diagram

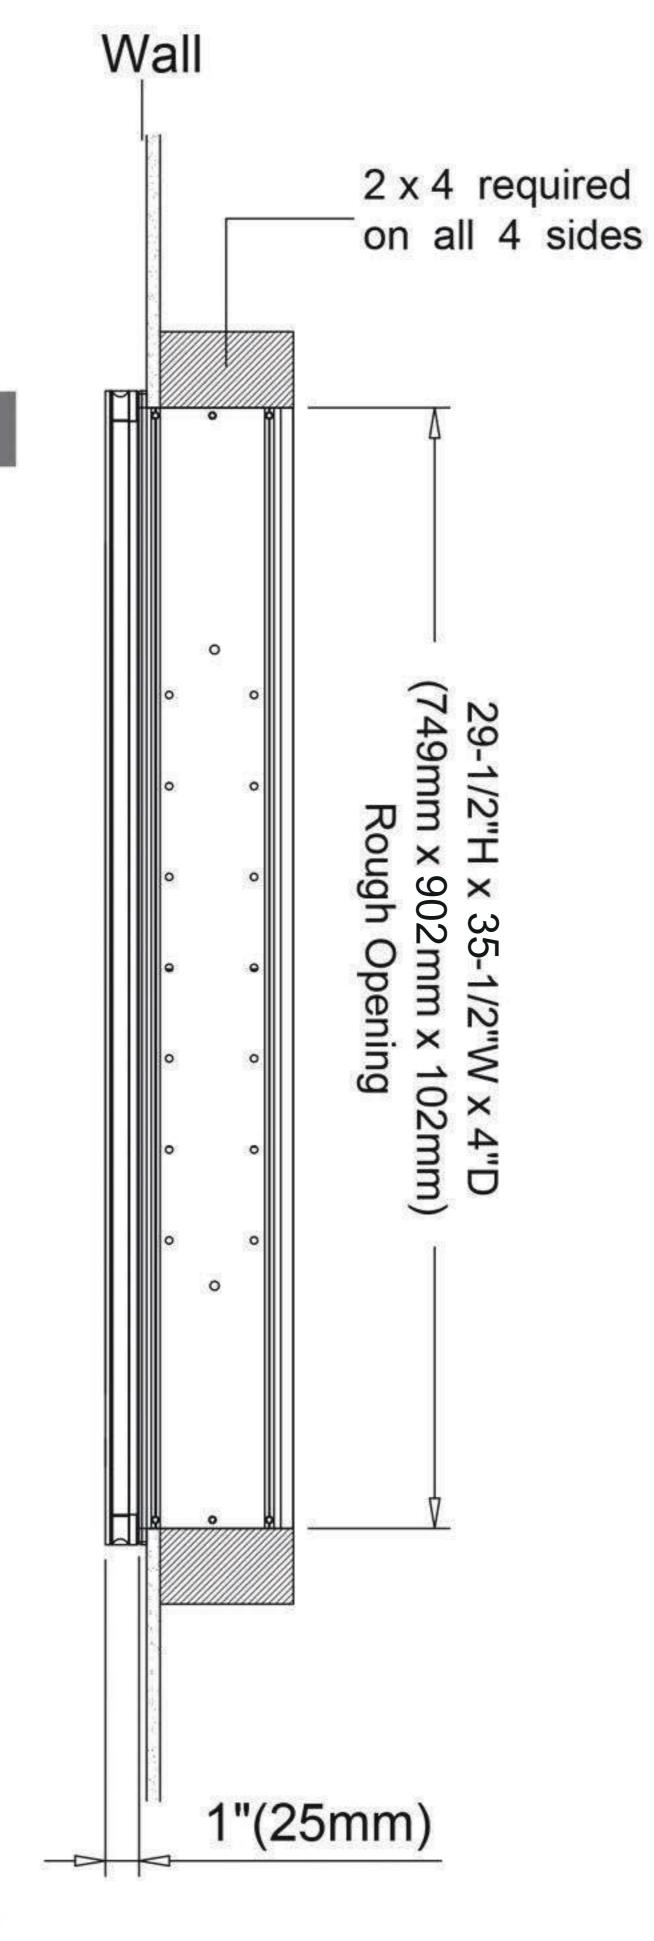


Recessed Mount

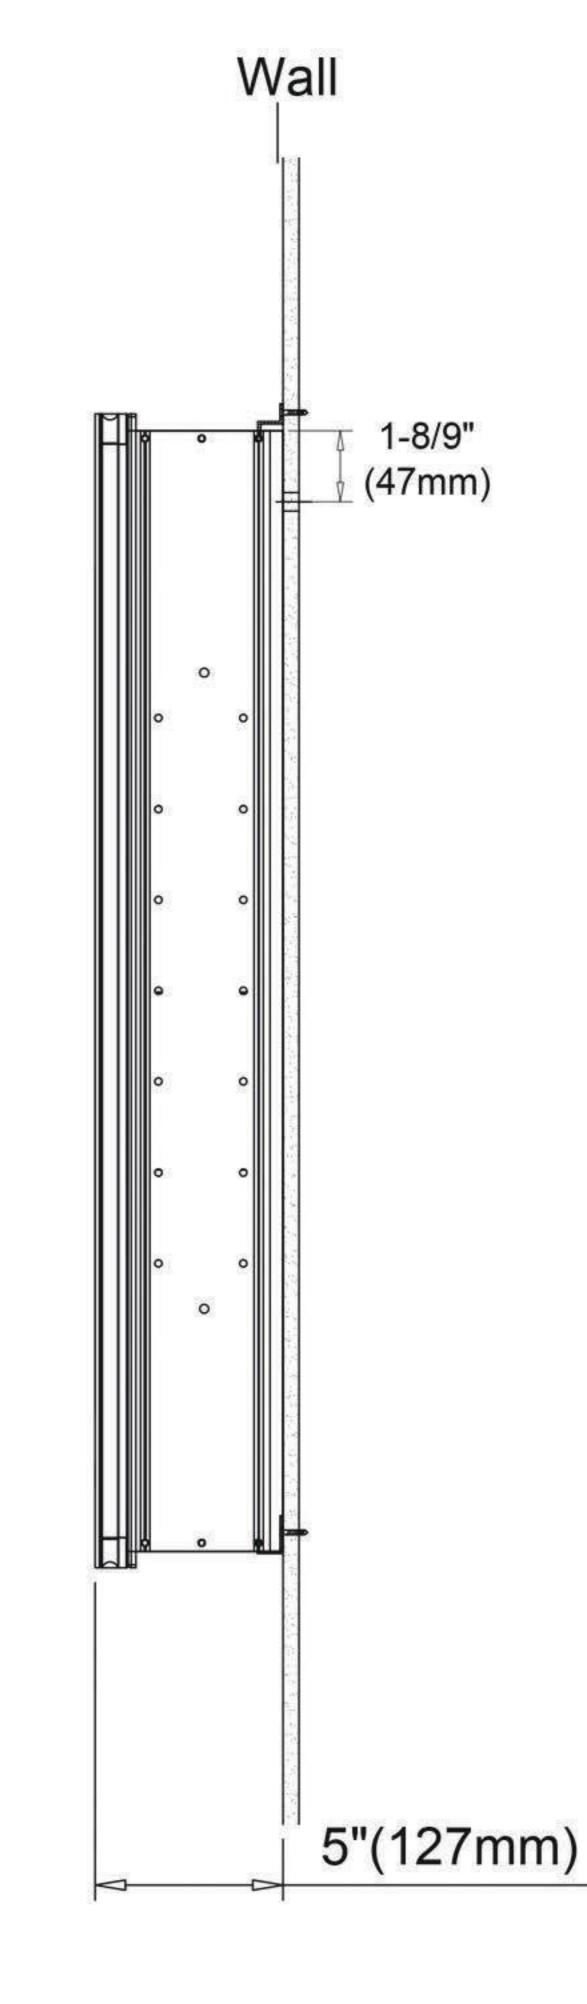

Surface Mount

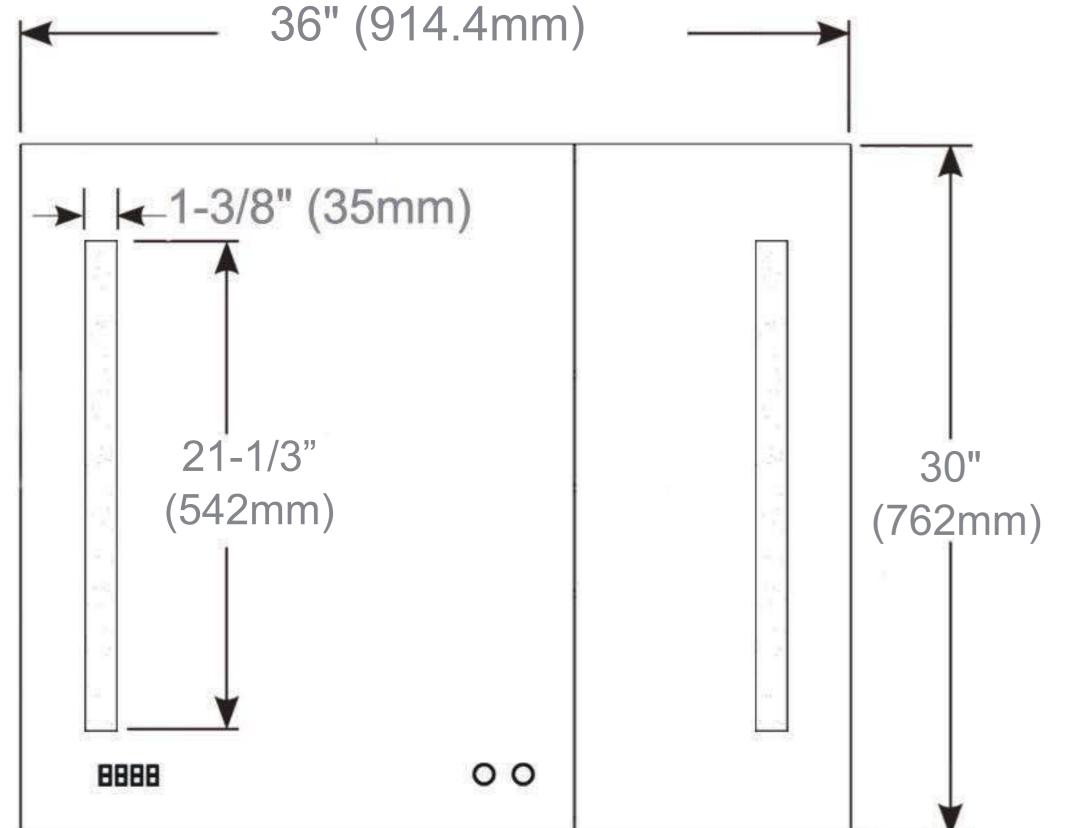

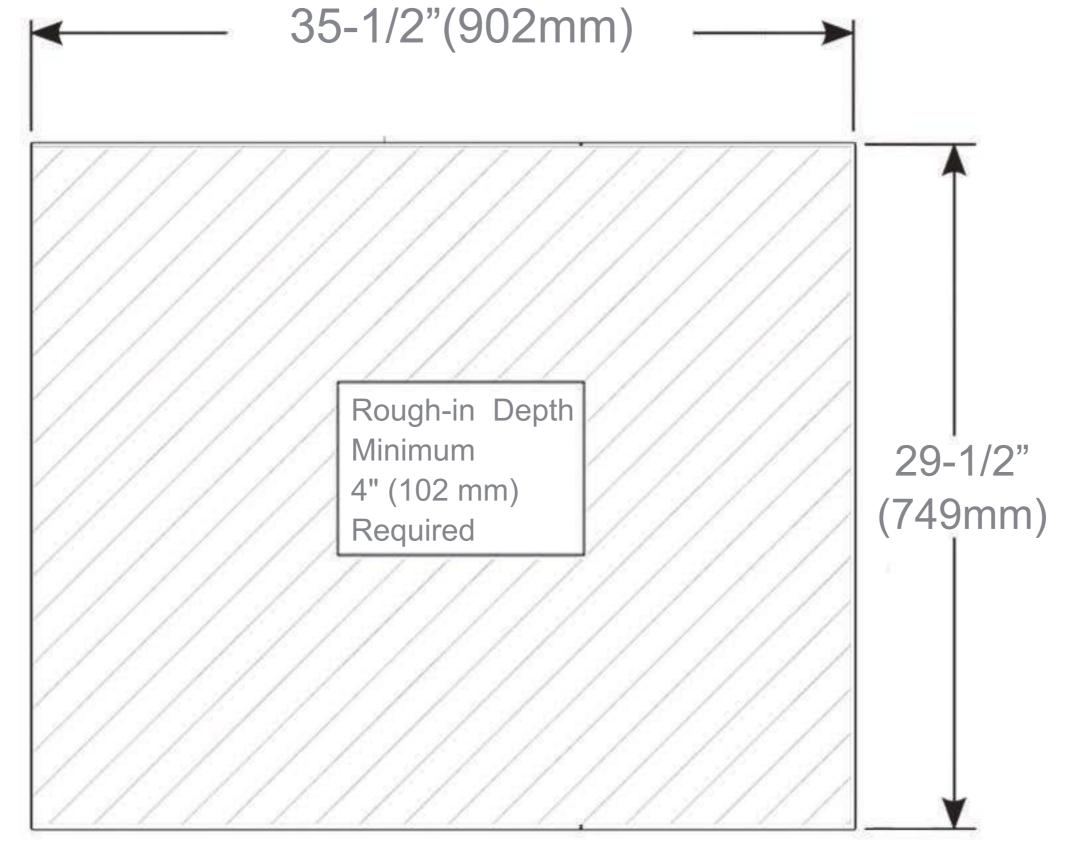

1-8/9" (47mm) 4-1/3" (110mm)

Cabinet Dimensions

Rough-in Dimensions

Back of Cabinet - Wire Access Location