




Handshower

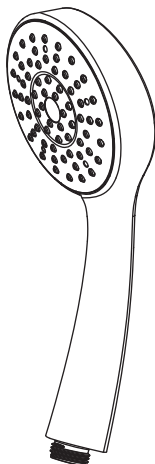

**MODERN
COLLECTION
TBW01019U2**

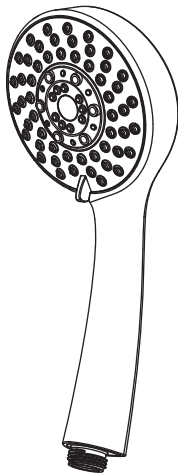

**MODERN
COLLECTION
TBW01020U2**

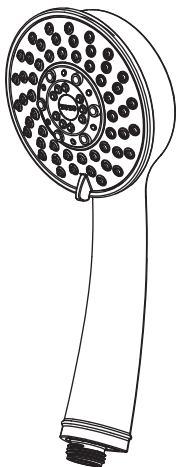

**CLASSIC
COLLECTION
TBW03003U2**

TABLE OF CONTENTS

Thanks for choosing TOTO! 2

Care & cleaning..... 2

Warnings..... 2

Before installation..... 2

Installation procedure..... 6

Warranty..... 7

Rough-in dimensions 11

THANKS FOR CHOOSING TOTO!

The mission of TOTO is to provide the world with healthy, hygienic and more comfortable lifestyles. We design every product with the balance of form and function as a guiding principle. Congratulations on your choice.

CARE & CLEANING

Your new handshower is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with mild soap, rinsing thoroughly with warm water and drying with a clean, soft cloth. Do not use abrasive cleaners, steel wool or harsh chemicals, as these will dull the finish. Failure to follow these instructions may void your warranty. If any nozzles become clogged with mineral build up, rub gently with finger tips to clean.

WARNINGS

- For safe operation of the handshower, please observe the following:
- Recommended operating pressure:
 - Minimum pressure.....20 psi (138 kPa), dynamic
 - Maximum pressure.....80 psi (551 kPa), static
 - It is suggested to use the temperature below 140°F(60°C)
 - Do not use steam for hot water supply.
 - Do not use the product at an ambient temperature below 32° F (0° C) .
 - Do not drop or damage the plated handshower. The plated surface may crack and cause injury! If the surface cracks, immediately replace the handshower with a new one.

BEFORE INSTALLATION

- Observe all local plumbing codes.
- Make sure the water supply is shut off.
- Read these instructions carefully to ensure proper installation.
- TOTO reserves the right to update product design without notice.
- Handshower must be installed with a certified backflow preventer.