



The Future Of Faucets



Submitted Model No.: N11-WID-1

### BATHROOM FOUNTAIN FAUCET

◆ Da Vinci Collection

◆ 8" Widespread


### STANDARD SPECIFICATIONS

- Max. flow rate 1.2 gpm @60 psi, 4/5 L/Min @ 414 kPa, Fountain Flow Rate .26gpm
- Three hole mount, 8" centers
- Fountain valve is a replaceable ceramic disc cartridge
- Ceramic disc cartridges for hot and cold handles
- Model has metal pop-up with overflow
- PVD finish

### WARRANTY

- Limited Lifetime — to the original end purchaser in consumer installations
- Commercial installations are warranted 3 years

### CERTIFICATIONS

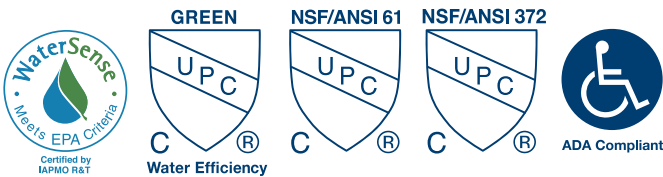

IAPMO certified to ASME A112.18.1/CSA B125.1 and ASME A112.18.2/CSA B125.2. IAPMO has also certified Nasoni fountain faucets to the following GREEN certifications:

- CALGREEN
- WaterSense® Certified
- LEED
- National Green Building Standard
- Green Building Assessment Protocol for Commercial Buildings
- Natural Resources Canada R-2000
- IAPMO Green

