

Features

- · Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 2003Lumens
- CRI 90+
- Integrated Defogger

Construction

- · Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 45W
- Electric Current: 0.38A
- Wattage: 45W

Model

SVANGE 2430R





Electrical System

- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A




CABINET CONFIGURATION



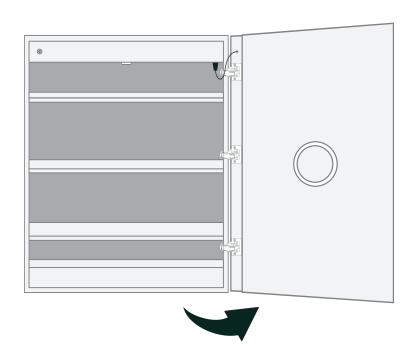





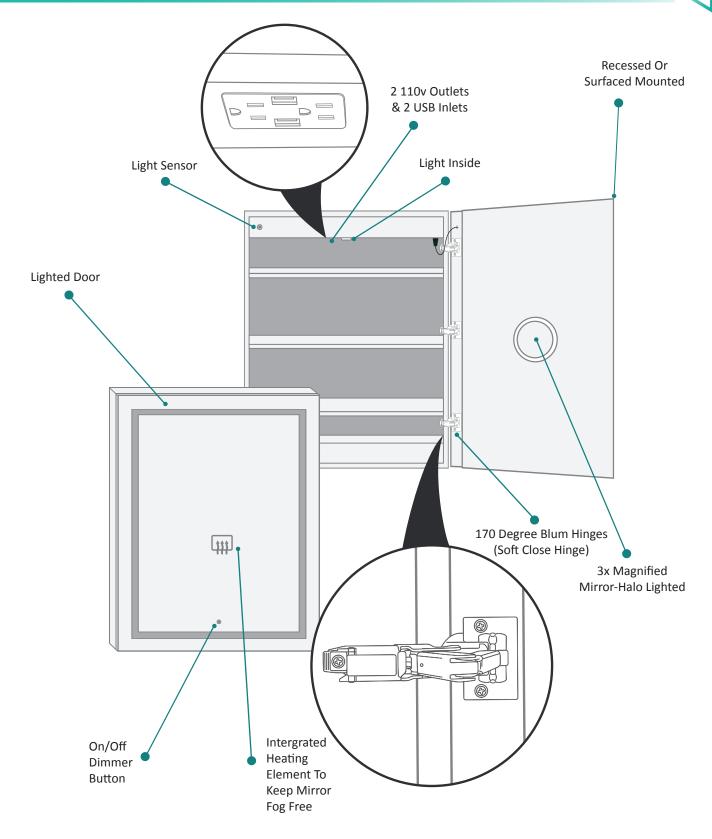



SURFACE MOUNT

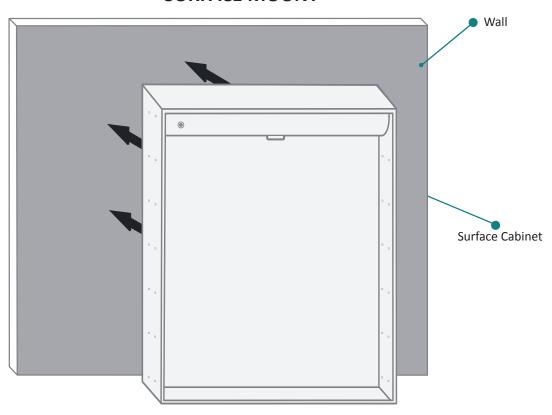

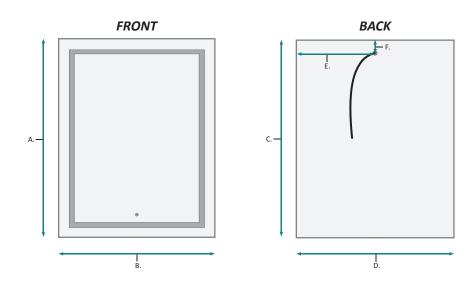


FRONT & BACKS


MODEL	DEL A		С	D	Е	F
SVANGE2430R	30	24	29-1/2	23	11-1/4	1-1/8

Kruge

SVANGER 2430R LED Medicine Cabinet - Specification Sheet

RECESSED MOUNT

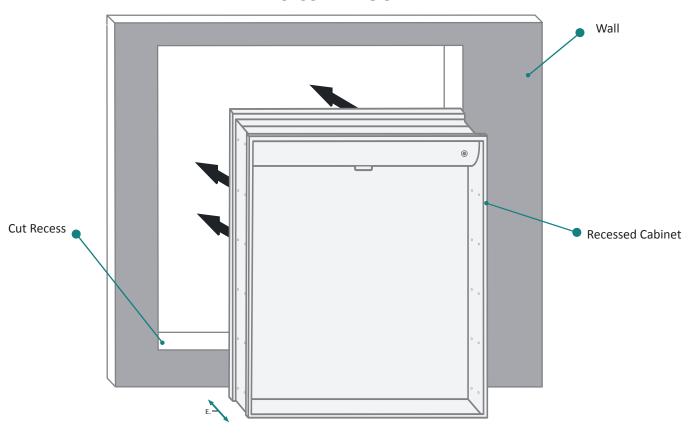

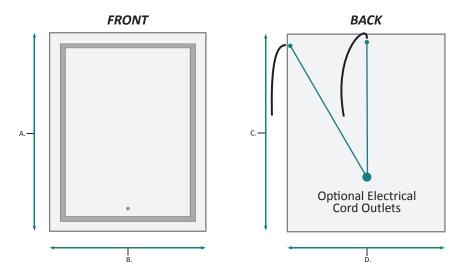


FRONT & BACKS

MODEL	Α	В	С	D	E	
SVANGE2430R	30	24	29-1/2	23	3-7/8	




RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

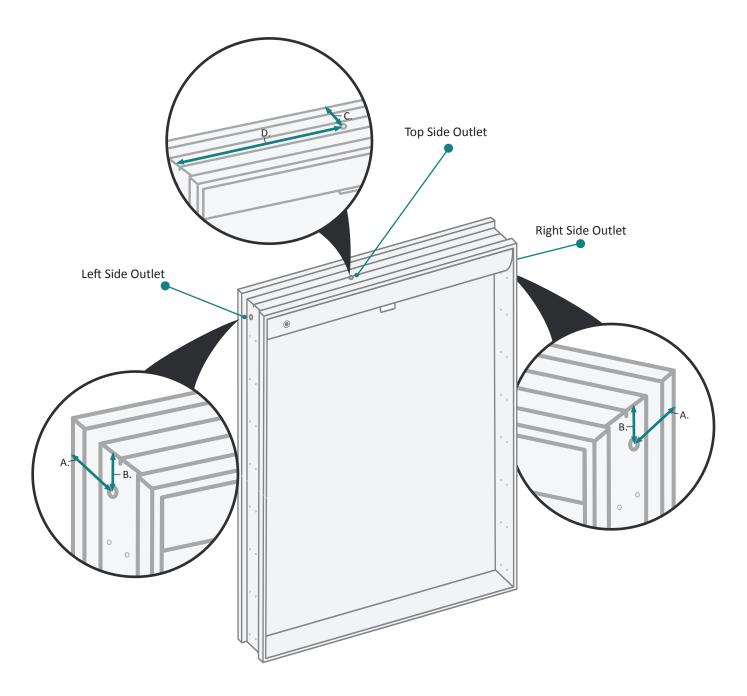


ELECTRICAL CORD LOCATIONS

MODEL	А	В	С	D
SVANGE2430R	1-1/2	1-1/8	1-3/8	11-1/4






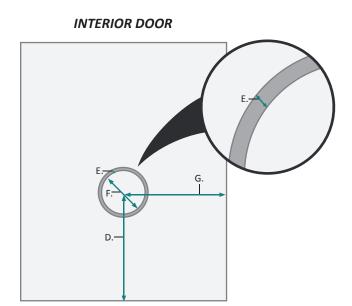

DOOR & CABINET

MODEL	А	В	С	D	Е	F	G
SVANGE2430R	7/8	3-7/8	4-3/4	18	3/8	5-1/4	11-1/4

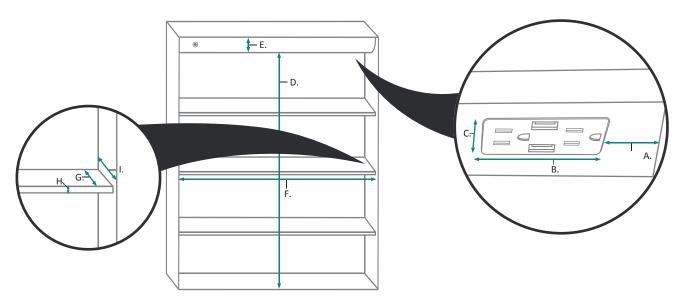

INTERIOR CABINET

MODEL	А	В	С	D	Е	F	G	Н	I
SVANGE2430R	3-3/4	5-5/8	1-1/4	38-1/4	2-1/4	22-1/2	2-3/8	3/8	3-5/8