

Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 6000K
- 3100 Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

Codes/Standards Applicable

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931


Electrical System

Requirements for each cabinet:

- 120Vac, 60Hz, 53W
- Electric Current: 0.44A
- Wattage: 53W

Model

- SVANGE 6036DLLR Right & Left Swinging Doors
- Included models in this configuration: Cabinet 1 = 2436L Cabinet 2 = 1236L Cabinet 3 = 2436R

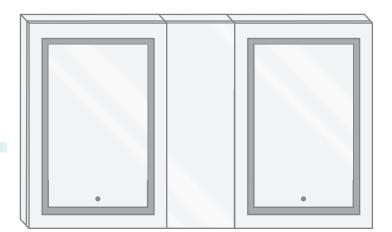


Outlet


- Performance Requirements: Contains the required Supervisory Circuit with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency: 60Hz
- Front Receptacle Current: 102-132VAC Nominal 15A
- USB Output Current: 5VDC Nominal 4A



CABINET CONFIGURATION


• Included models in this configuration: Cabinet 1 = 2436L Cabinet 2 = 1236L Cabinet 3 = 2436R

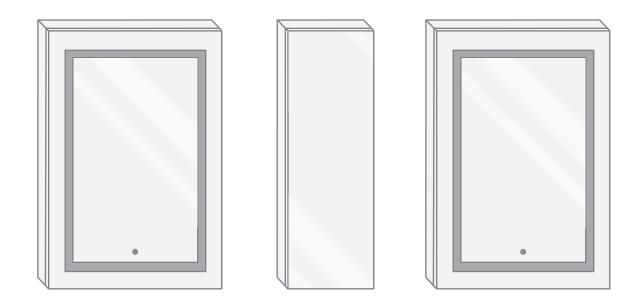

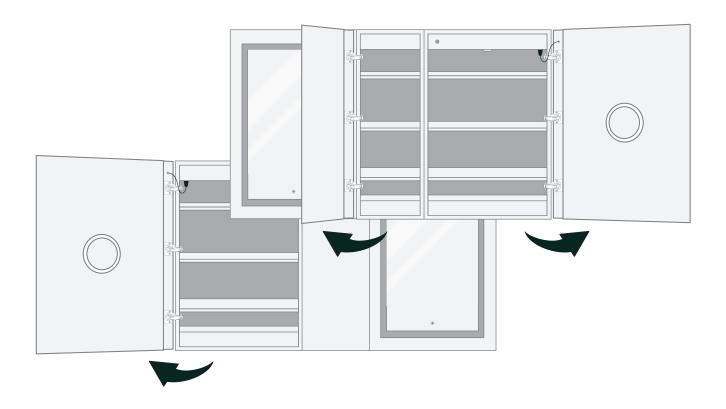


Kruge

SVANGE 6036DLLR Wall Mirror - Specification Sheet

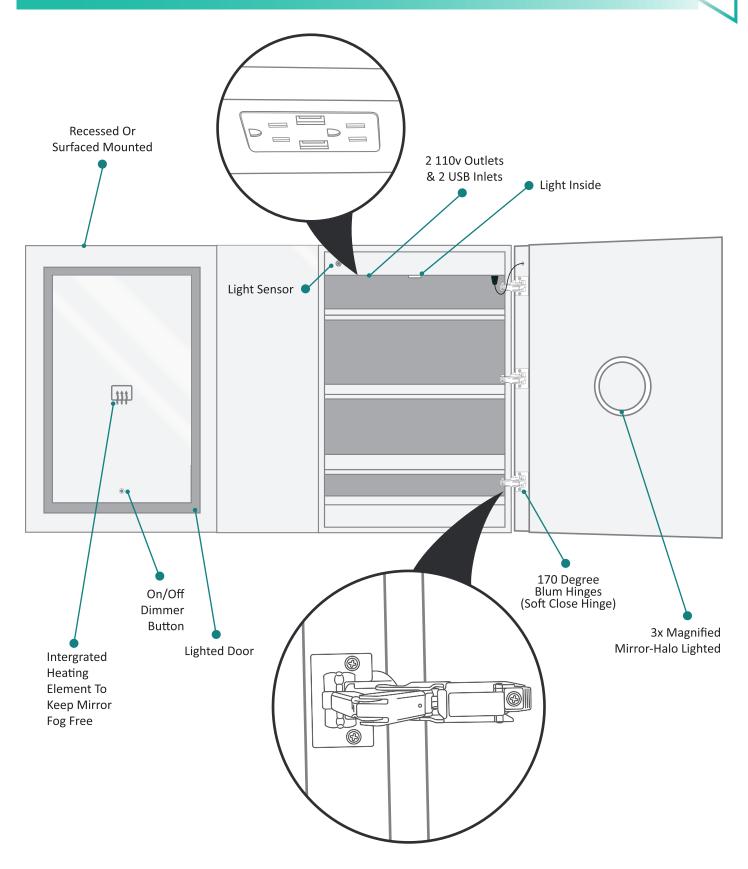



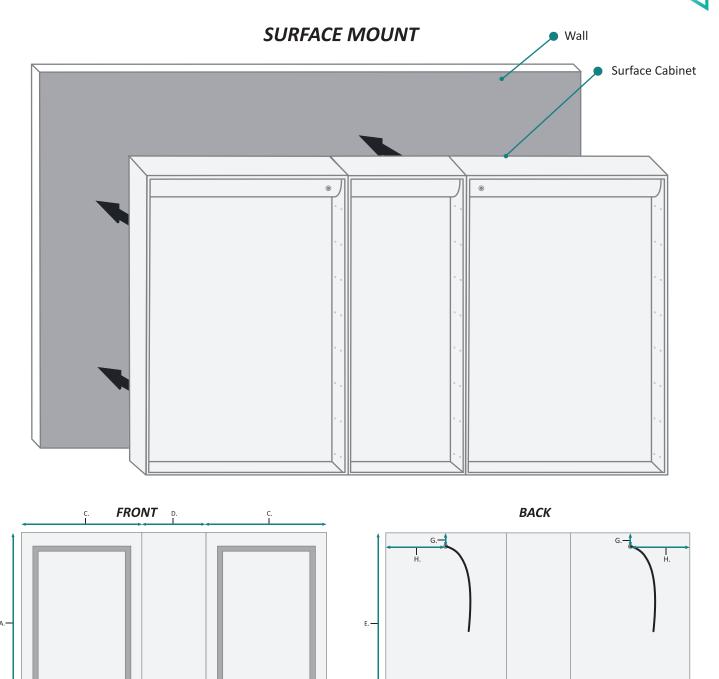


FRONT & BACKS

MODEL	А	В	С	D	E	F	G	н
SVANGE6036DLLR	36	60-1/4	24	12	36	60-1/4	1-1/8	12


Kruge

SVANGE 6036DLLR Wall Mirror - Specification Sheet

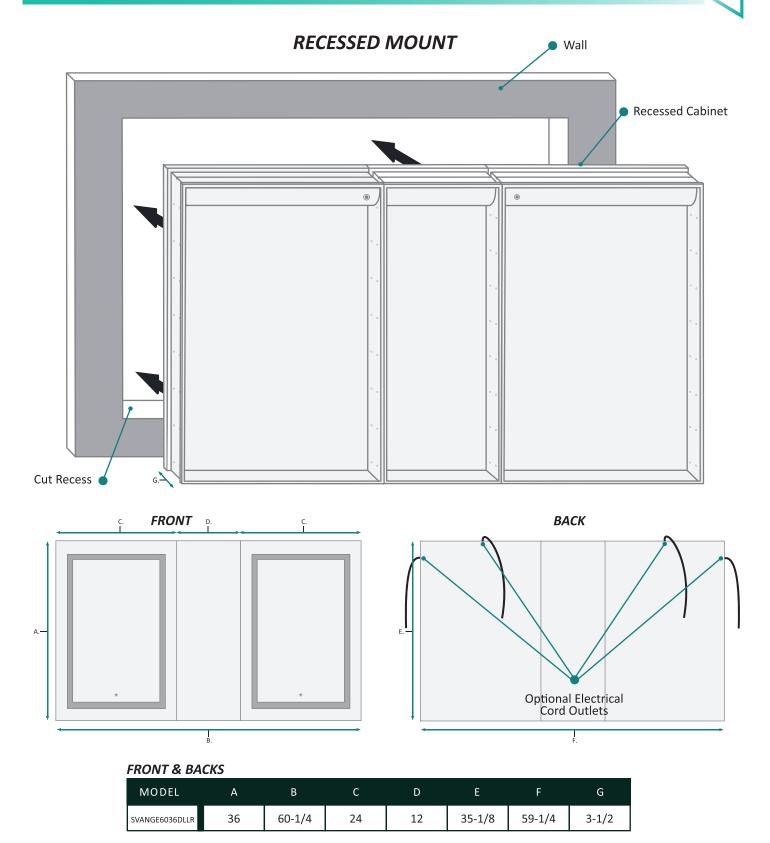




RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

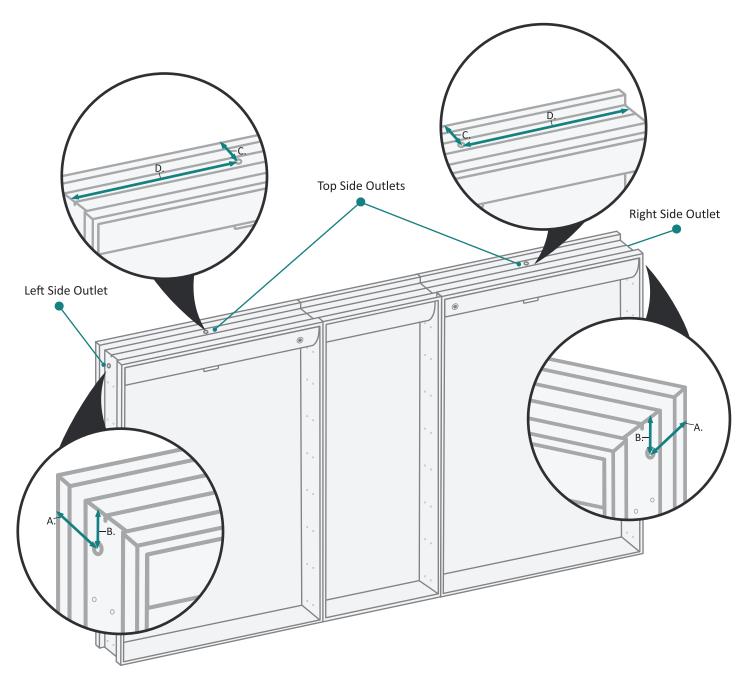

ELECTRICAL CORD LOCATIONS


MODEL	А	В	С	D
SVANGE6036DLLR	1-1/8	1-1/8	1-1-8	12



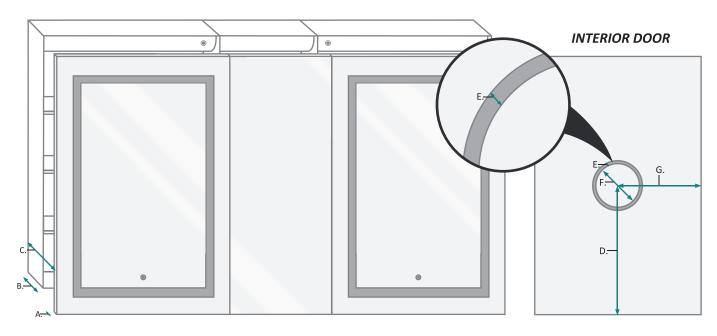

DOOR & CABINET

MODEL	А	В	С	D	Е	F	G
SVANGE6036DLLR	7/8	3-1/2	5	18	3/8	5-1/4	13

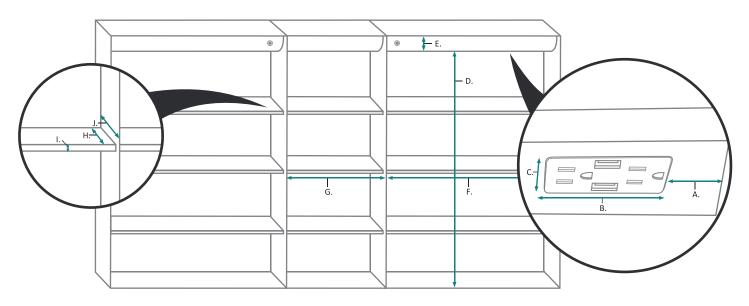

INTERIOR CABINET

MODEL	Α	В	С	D	Е	F	G	Н	1	J
SVANGE6036DLLR	3-3/4	5-5/8	1-1/4	32	2-1/4	22-1/4	10-1/4	2-3/8	3/8	3-5/8