



## DROP-IN BATHROOM SINK INSTALLATION

Please read entire installation instructions before starting. Observe all local building and safety codes and guidelines.

### INSTALLATION

1. Lower the sink into the sink cutout on the counter to confirm the sink will fit properly. The perimeter of the sink rim should connect with the counter, while the sink bowl should sit completely inside the counter.


Tip: For easier installation, install the drain and faucet before attaching the sink.

2. Remove the sink and run a bead of silicone sealant around the sink cutout to seal the rim against moisture and leaks.

3. Carefully lower the sink back into the cutout and press the sink firmly into the silicone sealant. Make sure that the sink is level and properly aligned.

4. With the sink in place, tighten the new mounting clips (if included) on the underside of the sink.

5. Wipe away any excess sealant around the rim of the sink with a damp cloth. If a lavatory drain is included, move on to the Drain Installation section.

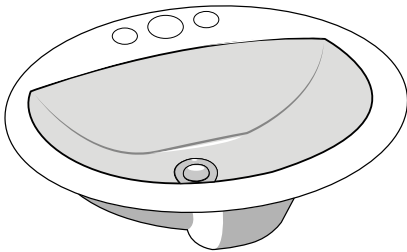

### DRAIN INSTALLATION

1. Disassemble the drain by removing the threaded tail piece, rubber sealing gaskets, friction washer and lock nut from the drain body.

2. Place thread sealant on the threaded section of the tail piece and reattach to the drain body.

3. Slide the flat rubber sealing gasket up the tail piece to the top of the drain body. This gasket will create a water tight seal between the drain flanges and sink.

4. Place the drain in the drain hole in the sink.

Silicone Sealant Damp Cloth Level

Thread Sealant Basin Wrench

Porcelain Drop-In Sink Installation Instructions 2

5. On the underside of the counter, attach the tapered rubber gasket. With the flat side facing down, slide the gasket up the threaded shank until it makes contact with the bottom of the sink.

6. Slide the friction washer up to meet the rubber gasket.

7. Thread the lock nut onto the threaded shank.

Hand-tighten and make sure that the drain is properly aligned. When ready, finish tightening with a basin wrench to secure the drain.