

Self-Rimming Lavatory



TABLE OF CONTENTS

Thanks for Choosing TOTO! 2

Before Installation 2

Installation Diagram..... 2

Installation Preparation 3

Installation Procedure..... 3

Care & Cleaning..... 3

Warranty..... 4

THANKS FOR CHOOSING TOTO!


The mission of TOTO is to provide the world with healthy, hygienic and more comfortable lifestyles. We design every product with the balance of form and function as a guiding principle. Congratulations on your choice.

BEFORE INSTALLATION

If you are installing this product in a new construction or remodel, please make sure you are following all local plumbing and building codes. Carefully unpack and examine your new fixture for damage. To help insure that the installation process will proceed smoothly and correctly, please read these instructions carefully before you begin.

INSTALLATION DIAGRAM

- The lavatory faucets and drain are not included.
- Fixture dimensions and hydraulic performance meet or exceed all standards and requirements of CAN/CSA B45 and ANSI/ASME A112.19.2 for vitreous china and A112.19.1 for cast iron.

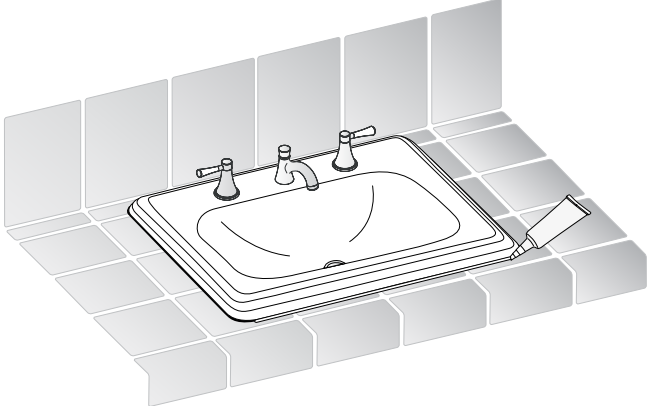

INSTALLATION PREPARATION

- Turn off water supply and remove the old lavatory. Inspect drain and supply pipes and replace as necessary.
- Use template provided with the lavatory. For replacement installation, ensure that existing cutout is the same size or smaller than required for the new lavatory.
- Self-rimming lavatory should be installed by an experienced professional. Failure to follow these instructions may result in product/property damage and/or personal injury.

NOTE: Install lavatory such that future removal of the fixture from underneath the counter is possible.

INSTALLATION PROCEDURE

- Cutout the provided template along the inside of the cutting line.
- Place the cut-out template on the counter-top, and ensure there is enough clearance for the faucet and drain fittings beneath the counter-top.
- Trace around the template opening on the counter-top.
- Cut out the opening on the counter-top by cutting along the traced line.
- Install the faucet and drain fittings (not supplied) per the manufacturer's instructions.
- If applicable, apply a continuous bead of sealant (not supplied) in the rim groove. Carefully place and position the lavatory onto the counter-top opening.
- After ensuring the proper alignment of the lavatory, fill in any voids as needed around the perimeter of the lavatory. Wipe away excess sealant. Allow sealant to set according to its instructions.
- Connect the trap to the drain and complete faucet installation as per manufacturer's specifications.
- Run water into lavatory and check entire installation for leaks.

CARE & CLEANING

For Cast Iron Lavatory: Rinse the basin out thoroughly after each use. Clean with a soft wet cloth and mild soap only. Do NOT use abrasive cleaning materials, or leave staining materials in contact with the surface, or use sharp, or metallic objects, as this will scratch, stain, or ruin the surface.