AutoFlush®


Box Contents

- AutoFlush Valve with Cord
- Installation instructions

Operation

The optional AutoFlush System feature automatically drains the MrSteam system following each use. A time delay allows the water to cool down (about two hours) before it drains by gravity for a safe and gentle operation.

Note: If the Express Steam® option has been installed, the AutoFlush will drain for ten minutes then refill with fresh water to begin the pre-heat cycle.

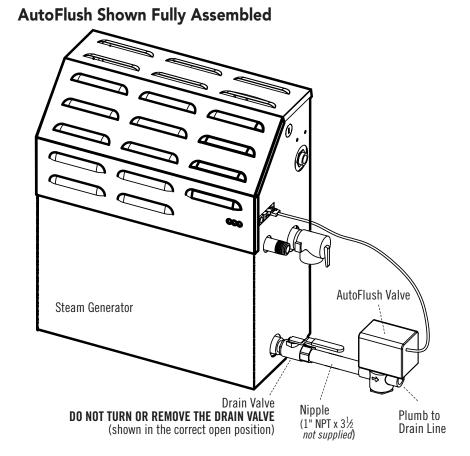

Our exclusive AutoFlush automatically and electronically drains the system, providing CleanSteam... Every Time® and introduces fresh water.

FOR ILLUSTRATIVE PURPOSES ONLY. IMPORTANT NOTE: FOR SAFE AND TROUBLE FREE INSTALLATION

before installation to download the Installation, Operation and Maintenance Manual or refer to the manual provided with the unit.

| MODEL | PROJECT INFORMATION | |
|-----------|---------------------|---------------|
| MS 81500E | Location: | Contractor: |
| | Architect: | Submitted By: |
| | Engineer: | Date: |
| Notes: | | |