


# TECHNICAL SPECIFICATIONS.

|                                    |   |
|------------------------------------|---|
| Resolution (theoretical)           | 17 lp/mm  |
| Image pixel size                   | 30µm  |
| Image grey levels                  | 16 bit (65,536 grey levels)   |
| Supported plate sizes              | Size 0, 1, 2, 3.  |
| Plate size selection               | Automatic   |
| Read time                          | 4 – 8 s   |
| Plate deletion                     | Automatic   |
| Dimensions (H x L x D)             | 224 x 163 x 290 mm  |
| Weight                             | 5.6 kg  |
| Power supply                       | 110 - 240 V 50/60 Hz (24 Watts)   |
| Connectivity                       | ETHERNET direct to PC or in LAN   |
| Acquisition software (for PC)      | iCapture with aMUT interface for third party software   |
| Image management software (for PC) | NNT (complies with ISDP®10003:2018 as per EN ISO/IEC 17065:2012 certificate number 2019003109-1) and App iPad NNT viewer (free) |
| Supported protocols                | DICOM 3.0, TWAIN, VDDS  |
| DICOM nodes                        | IHE compliant (Print; Storage Commitment, SR document; WorkList; MPPS; Query/Retrieve)  |

## MINIMUM SYSTEM REQUIREMENTS

|                             |  |
|-----------------------------|--|
| Supported operating systems | Microsoft® Windows® 10 Professional 64 bit             |
| Display settings            | 1280 x 1024; 1344 x 768 or greater, 16 million colours |
| Port                        | PC Server: RJ 45   PC Client connected in LAN          |

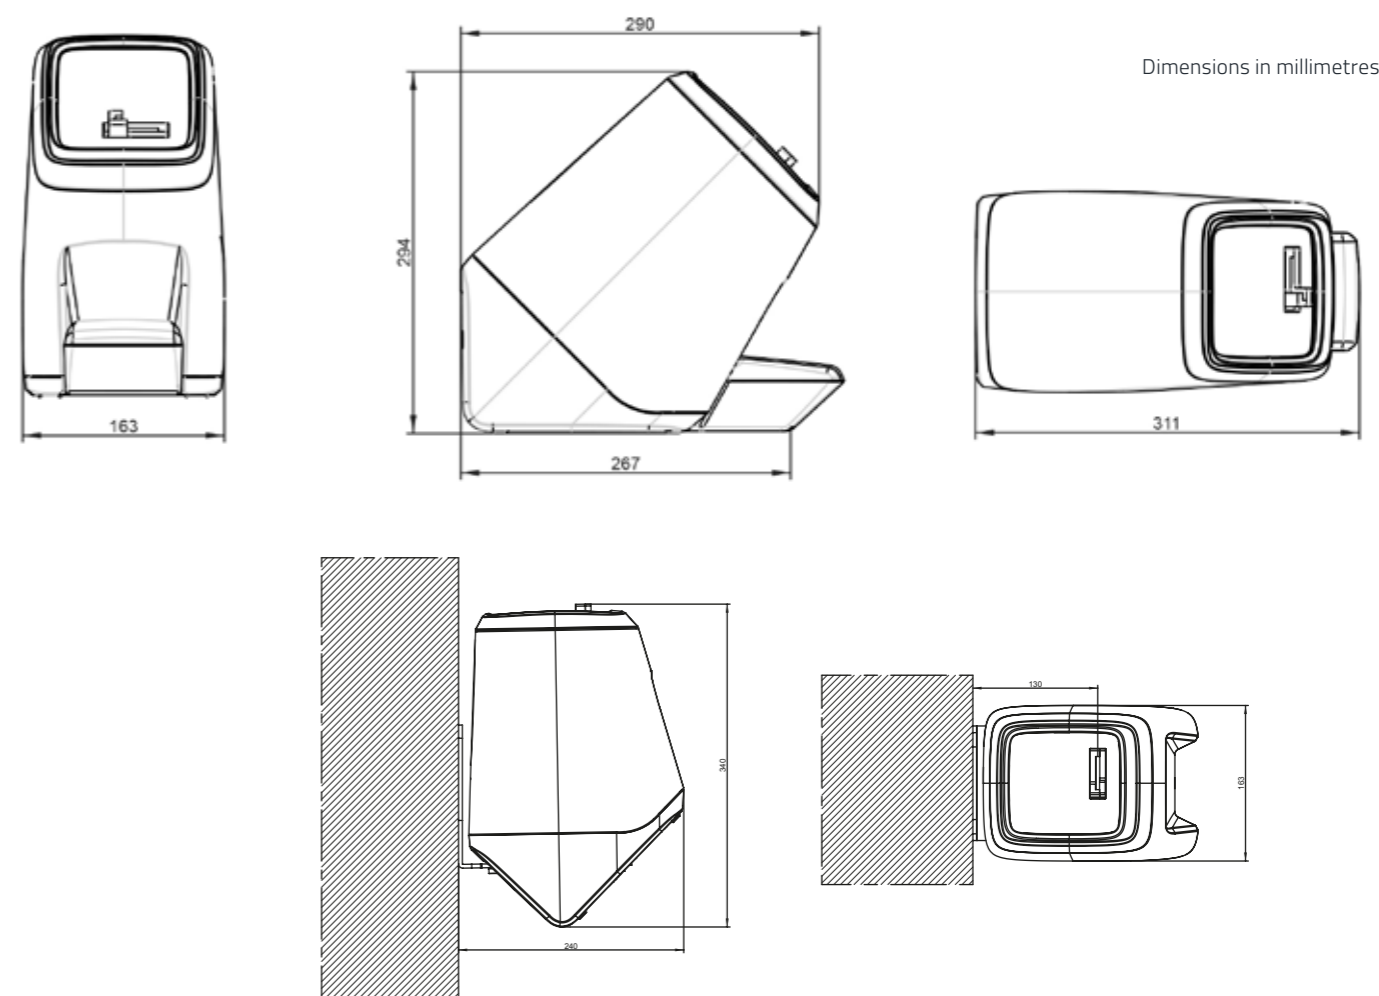

Size 0  
22 x 31 mm  
Pixels  
762 x 1024  
Memory size  
1 Mb



Size 1  
24 x 40 mm  
Pixels  
792 x 1321  
Memory size  
2 Mb



Size 2  
31 x 41 mm  
Pixels  
1024 x 1354  
Memory size  
3 Mb



Size 3  
27 x 54 mm  
Pixels  
891 x 1783  
Memory size  
4 Mb