


STONE AGE



CONCRETE TABLE TENNIS

BEAVADO OUTDOOR | EVERYONE PLAYS

Stone Age Concrete Games, Inc.
Cantilever Table Tennis Table Proprietary

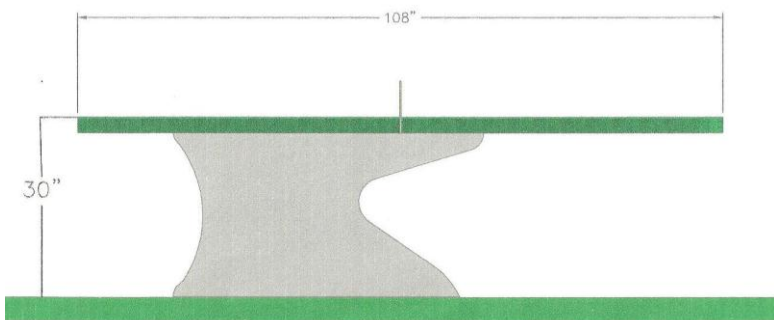

Specified Installation: Bolts together with standard hand tools and supplied vandal resistant fasteners. Table installs quickly on flat hard surface such as concrete and asphalt without sub grade construction. Cantilever legs are fitted for bolt-down connection to concrete or asphalt and steel “L” brackets are included. Installation time is approximately 1-2 hours.

Size: 5' x 9' x 30"

Weight: Approximate weight is 2,650 lb

Concrete: Table and legs are pre cast 5000 PSI concrete with steel reinforcement and Novamesh™ fiber reinforcement.

Connectors: All exposed connectors are pin in hex vandal resistant bolts

Recommended Maximum Loads: Table top 100psf live load, 420 lb point load

Threaded Inserts: All bolt connections use Zamac (rustproof) cast in place threaded anchors.

Legs: 5000 psi Concrete reinforced with #4 (1/2") rebar and 15 lb per yard FORTA FERRO™ fiber reinforcement.

Table Tops: 2 5/8" thick solid 5000psi Concrete. Top is reinforced with 4-4-4 welded wire reinforcing steel and 15 pounds per yard Novamesh™ fiber reinforcement. Fiber is installed in backer layer and does not show in the colored polished top. Concrete tops are integrally died concrete and or acid stained concrete depending on color selections. Colored tops have some color variation. Regulation Table Tennis lines are standard on all tables. Standard finish is precision cast and polished finish (similar to smooth solid surface concrete counter top.) Edges are cast 3/8" radius for incidental contact safety.

Standard Net: Net is 3/8" steel with green powder coat finish.

Custom Stainless Steel Net: 3/8" steel polished and clear powder coat finish.

Steel Components: Steel runners are 2x2" square 1/8" wall tubing with black powder coating.

Sealer: All concrete parts are sealed with Seal Crete Premium Hi Gloss Sealer #605 concrete sealer.