




ABOVE ITEM IS AVAILABLE IN THE BRIDCO LOAD RATED RANGE OF COMPONENTS.
SEE PAGE 48 FOR FURTHER DETAILS.
F = FORGED


STANDARD DEE SHACKLE

Code	A	B	D	L1	L2	TDL (KG)
SS-360F-05	4.8	10.8	9.8	18	30	400
SS-360F-06	5.8	13.5	12	21	36	550
SS-360-07	6.8	14.5	13.5	24.2	41.3	720
SS-360F-08	7.6	17.3	15.9	29.7	48.2	1120
SS-360F-10	9.7	22.5	20	35.7	60	1600
SS-360F-12	11.6	27	23.7	43.1	70	2400
SS-360-16	16	32	31.8	56	95	3600
SS-360-19	19	38	37.6	66	110	4400
SS-360-25	24.7	50.4	49.7	87	148.7	TBA
SS-360-32	31.2	64.4	64.6	110.1	190	TBA

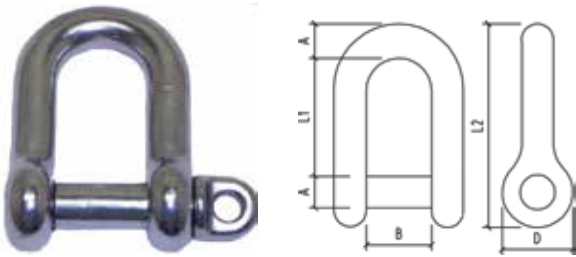


CAPTIVE PIN DEE SHACKLE

Code	A	B	D	L1	L2	TDL (KG)
SS-360LK-06	5.2	13.2	11.3	22.2	36	550
SS-360LK-08	8.2	15.8	15.7	28	48	1120
SS-360LK-10	9.92	19.84	19.2	35	58.2	1600

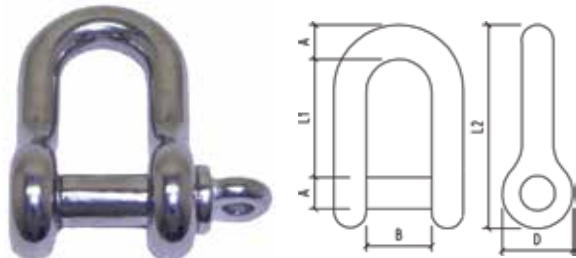


DEE SHACKLE WITH OVERSIZE PIN

Code	PIN	BODY	B	D	L1	L2	TDL (KG)
SS-3611-103	10.6	9.8	31.9	16.1	23.5	57.5	2200
SS-3611-1035	12.5	11.4	38	20.7	28	70	2400
SS-3611-104	15.4	12.7	42.5	20.7	31.7	78	3600
SS-3611-105	18.6	15.8	49.7	27.1	39.2	95.5	4400

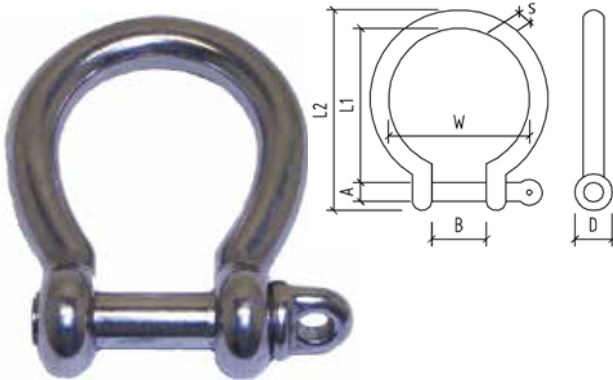

BOW SHACKLE

Code	S	B	D	W	L1	L2	TDL (KG)
SS-370F-03	2.9	6.3	7	9.1	13	19.3	140
SS-370F-05	5	11	10	18	27	40	300
SS-370F-06	5.8	13.6	11.9	20.6	31	46	520
SS-370F-08	7.8	17.9	16	25.5	36.7	57	1050
SS-370F-10	9.7	20.8	20	34.1	46.75	70.7	1300
SS-370F-12	11.8	25.8	23.9	41.9	58.3	86.5	2200
SS-370-16	15.6	31.8	31.9	56	74.8	115.5	3375
SS-370-22	21.6	43.7	44	75	98	150	5200

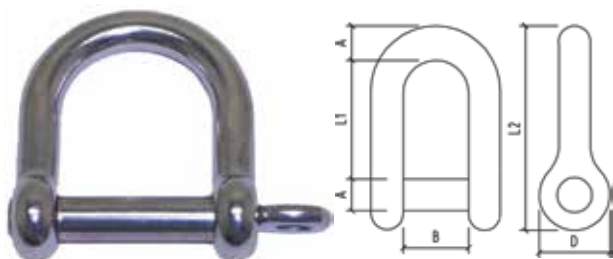

WIDE DEE SHACKLE

Code	A	B	D	L1	L2
SS-360W-08	8	28.3	15.5	31	50
SS-360W-12	11.5	49.2	23.3	64.4	92

F = FORGED
TDL = TESTED DEFORMATION LOAD