


## LOAD RATED DEE SHACKLES

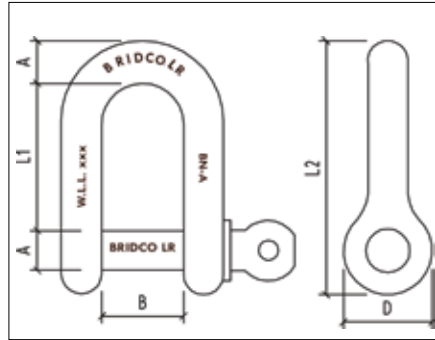


Offset Forged 316 Stainless Steel  
 Safety Factor – 4:1  
 Proof load – 2 x WLL

### LOAD RATED DEE SHACKLES AISI 316

CODE	A mm	B mm	D mm	L1 mm	WLL t
SS-360F-10LR	10.00	20.50	19.60	35.60	0.75
SS-360F-12LR	12.00	24.50	23.85	42.60	1.25
SS-360F-16LR	16.00	33.20	31.60	57.00	2.00

## LOAD RATED BOW SHACKLES

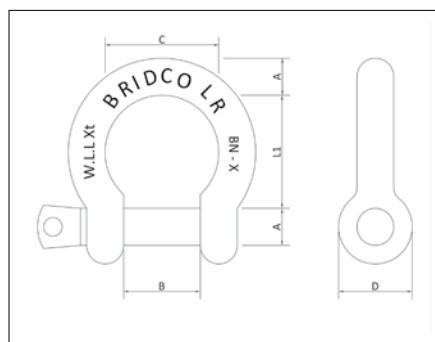

Offset Forged 316 Stainless Steel  
 Safety Factor – 6:1  
 Proof load – 2 x WLL

### BRIDCO LOAD RATED BOW SHACKLES AISI 316

Code	A mm	B mm	C mm	D mm	L1 mm	WLL t
SS-370F-10LR	10.00	30.50	30.50	19.60	37.30	0.75
SS-370F-12LR	12.00	36.00	36.00	23.75	46.80	1.25
SS-370F-16LR	16.00	49.50	49.50	31.80	60.70	2.00
SS-370F-19LR	19.00	57.00	57.00	38.10	75.00	2.50

