


L Bohrungs funktionsprinzip



Technische Eigenschaft

| Artikel | Größe K | Arbeitsdruck Bar | Abmessungen-mm | | | | | | | | | | |
|-----------|------------|---------------------|----------------|----|----|-----|-----|------|------|-------|-----|-------|----|
| | | | A | B | C | D | E | F | FI | G | H | I | J |
| BV3LG14N | 1/4" BSP | 500 | 45 | 35 | 35 | 77 | 145 | AA24 | AA24 | 48.50 | 75 | DN 10 | 52 |
| BV3LG38N | 3/8" BSP | 500 | 45 | 35 | 35 | 77 | 145 | AA24 | AA24 | 48.50 | 75 | DN 10 | 52 |
| BV3LG12N | 1/2" BSP | 500 | 50 | 40 | 40 | 82 | 150 | AA30 | AA30 | 53.50 | 84 | DN 13 | 60 |
| BV3LG58N | 5/8" BSP | 500 | 56 | 45 | 45 | 87 | 150 | AA34 | AA34 | 58.50 | 94 | DN 16 | 65 |
| BV3LG34N | 3/4" BSP | 400 | 60 | 55 | 55 | 111 | 225 | AA38 | AA38 | 73 | 96 | DN 20 | 76 |
| BV3LG1N | 1" BSP | 400 | 70 | 60 | 60 | 116 | 235 | AA46 | AA46 | 78 | 118 | DN 25 | 85 |
| BV3LG114N | 1 1/4" BSP | 400 | 70 | 60 | 60 | 116 | 240 | AA50 | AA50 | 78 | 134 | DN 25 | 91 |
| BV3LG112N | 1 1/2" BSP | 380 | 70 | 60 | 60 | 116 | 245 | AA55 | AA55 | 78 | 140 | DN 25 | 94 |

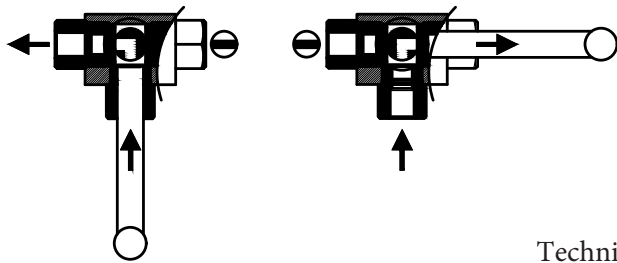