




WOODOC 10 INDOOR SEALER

Clear. Smooth natural finish.

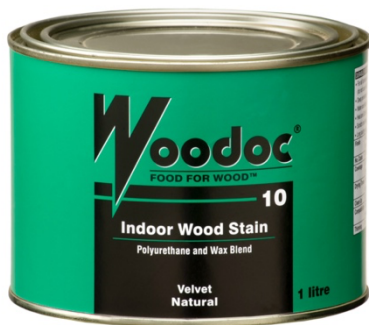

Typical Application:

Suitable for general indoor applications. Woodoc 10 gives a fine finish that is heat-, stain-, alcohol- and water-resistant. Only for interior use. **Not suitable for use on floors.**

Product Features:

Woodoc 10 creates a clear, velvet finish and is the most popular sealer in the interior range. This sealer applies easily, and the gloss of the sealer may be infinitely varied, using different application techniques, from high gloss, through “velvet” or semi-gloss, to absolute matt.

- Easy to apply.
- Penetrates wood, binds with it and lends a flexible yet strong and resistant surface finish.
- Suitable for all types of wood.
- Non-toxic once dry.
- Does not affect glue.
- Complete how-to-use instructions on label.

WHERE TO USE PRODUCT

For indoor use only. Where a clear, velvet finish is required. Do not use product on floors. Water, alcohol, heat (up to 180 Deg C) and scratch resistant.

HOW TO PREPARE THE SURFACE

New wood: Sand until smooth. Remove dust with clean, dry cloth. Then wipe with white spirits.

Previously varnished wood: Remove varnish by sanding/ using paint stripper. Neutralise paint stripper according to manufacturer's instructions. Allow wood to dry completely. Sand until smooth. Remove dust with clean, dry cloth. Then wipe with white spirits.

Oiled wood: Sand until smooth. Then scrub well with Steel or Stainless Steel Wool and white spirits. Clean off residue with clean, dry cloth. Allow surface to dry.

Wood previously treated with Woodoc: Scrub well with Steel or Stainless Steel Wool and white spirits. Clean off residue with clean, dry cloth. Allow surface to dry.

HOW TO APPLY THE PRODUCT

Stir well before and during application. Do not shake or dilute product. Apply product with a good quality brush. Apply first coat until surface remains evenly glossy for at least 10 minutes after application. Apply more product to dull/dry areas. Allow coat to dry **completely (4-8 hrs depending on temp. and humidity)**. Sand lightly with Woodoc Steel Wool. Remove dust with clean, dry cloth. Then wipe with white spirits. Apply two more coats in the same way. When the third coat is dry the surface can be rubbed down with Steel or Stainless Steel Wool and Woodoc Deep Penetrating Furniture Wax. **Always apply a minimum of three coats.** Extreme weather conditions, e.g. very high/low



temperatures can influence the appearance (gloss) of the final finish.

There is a choice of three finishes when applying final coat:

- 1. Matt finish:** Wipe down third coat with paper towel immediately after application.
- 2. Velvet finish:** Rub down with steel or Stainless Steel Wool and Woodoc Deep Penetrating Furniture Wax after 3rd coat is completely dry.
- 3. Gloss finish:** Let the final coat dry and do not sand.

COVERAGE

± 3,3 m² per litre (for three coats)

WARRANTY

Rekara Mills (Pty) Ltd warrants that this product, as consigned from our factory, was subject to strict quality assurance tests and meets durability, safety, and quality standards. The product must be used, stored and handled strictly according to the instructions and warnings provided on the container and/or any pamphlet attached thereto or made available with the product. All such instructions and warnings must be strictly adhered to otherwise Rekara Mills (Pty) Ltd accepts no responsibility for the use or performance of this product.

APPLICATION TIPS:

1. Stir the contents thoroughly before use. The product will be amber in colour and clear.
2. Always give three coats – our tests show that longevity is vastly extended with three vs. two coats.
3. The first coat penetrates the wood and is the foundation for subsequent coats. Make sure the surface is evenly wet for 10 min, applying more product in areas which look dull.
4. Let the first coat dry overnight (~6-8 hours). Subsequent coats dry in as little as 2-4 hrs.
5. Always give a light sanding between coats 1&2 and 2&3.
6. Use sand paper 220 grade or finer between 1&2 and,
7. 320 grade or finer between 2&3.
8. Steel wool can also be used between coats - grade 000 or 0000. Very fine stainless steel wool can also be used as it is good on acidic woods such as Oak, Walnut or Mahogany.
9. Woodoc Deep Penetrating Furniture Wax (IPW) can be used when sanding or rubbing with steel wool or wet/dry sand paper to give an ultra-smooth finish.
10. Wipe clean with white spirits after sanding and before the next coat.
11. Use Woodoc Deep Penetrating Furniture Wax (IPW) to clean and maintain the finish.
12. Following these tips not only gives a beautiful silky finish but also increases the performance/longevity of the finish.

Application: Preferably by brush. Clean brush with white spirits.

Dilution: Not recommended.

Drying time: Drying will vary, depending on moisture and atmospheric conditions.

Product Properties: Clear, indoor wood sealer Formaldehyde-Free.

Wax Content: Low.

Compatibility: White spirits.

Non-Compatibility: Acetone, Lacquer Thinners, Benzene and other solvents.

Packaging: 500ml, 1 litre and 5 litres. (20 or 200 litres available on request from dealer)

ALWAYS READ THE DIRECTIONS ON THE TIN BEFORE STARTING WORK.

FLAMMABLE. Keep out of reach of children. Harmful when consumed. Ingestion may cause chemical pneumonitis. IMPORTANT: This product hardens through contact with air (oxygen). Replace lid firmly after use to prolong pot life.

If you have any questions, please get in touch for expert advice. You can contact us on 0800 228 9088 (UK Only), +44 (0)1223 655 686 (Europe) or by email at

**info@woodoc.eu
www.woodoc.eu**