


# Woodoc 45 Specification Sheet

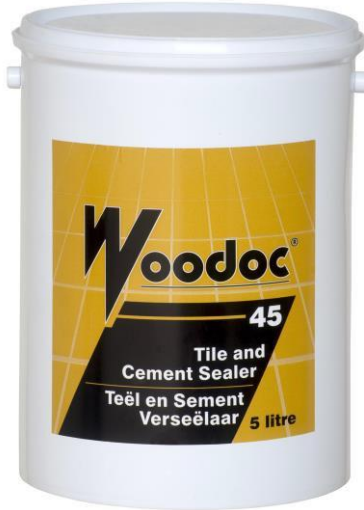

## Typical Application:

For interior/external use on unglazed porous substrates like unsealed tiles, cement, stone and brick. It gives a clear, gloss finish.

## Product Features:

- ✓ Strong, durable surface finish.
- ✓ Water-repellent.
- ✓ Stain- and oil resistant.
- ✓ Easy to use.
- ✓ Easy to clean brushes and equipment with water.
- ✓ Environment-friendly.
- ✓ Complete how-to-use instructions on label.

**No:** WD 45/004/EU

**Dated:** 11/04/17

**Name:** Woodoc 45 – Tile and Cement Sealer

**Description:** Water-based tile and cement sealer for unglazed porous substrates.

**Coverage:** 5 – 12 m<sup>2</sup> per litre, depending on porosity of substrate.

**Application:** With paint brush. Clean brushes with water immediately after use.

**Dilution:** Not recommended

**Drying Time:** 2 – 4 hours. Allow 24 hours before surfaced is used.

**Product Properties:** Clear, water-based tile and cement sealer.

**Wax Content:** None

**Compatibility:** Water

**Packaging:** 1 litre, 5 litre. (20 litres available on request)



Manufactured and marketed by: Rekara Mills (Pty) Ltd  
PO Box 16, Fort Beaufort 5720, South Africa  
Tel +2746 645 1109 Fax +2746 645 1538

Europe: +44(0)1223 – 655 686

Email: [info@woodoc.eu](mailto:info@woodoc.eu)

Website: [www.woodoc.eu](http://www.woodoc.eu)

Customer Service:

Tel (Office hours)

0800 228 9088 (UK), (1) 840 3969 (ROI)

+44 1223 655 686 (Europe)

Email: [info@woodoc.eu](mailto:info@woodoc.eu) or visit [www.woodoc.eu](http://www.woodoc.eu)