


Woodoc 25 Clear Matt/Satin Specification Sheet

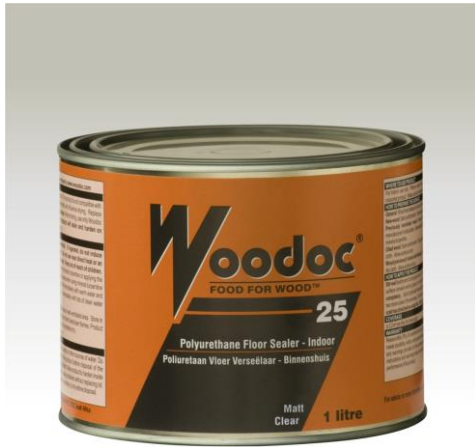

Typical Application:

Suitable for application to all indoor wooden floors and stairs. Only for interior use. Resistant to normal domestic wear and tear. Woodoc 25 is not an industrial product.

Product Features:

Woodoc 25 creates a clear satin or matt finish. It is a remarkably tough, wear resistant floor sealer and imparts a hard wearing matt or satin finish that enhances the colour and grain of all woods.

- Penetrates wood, binds with it and lends a flexible yet strong and resistant surface finish.
- Water-, alcohol-, heat- and stain-resistant.
- Protects against scratching.
- Will not chip or flake.
- Applies easily leaving no brush marks.
- Suitable for all types of wood.
- Fills the grain of open-grained woods.
- Non-toxic once dry.
- Does not affect glue.

NOTE: Wooden floors should preferably not be washed with water and detergent. It is recommended that floors are cleaned and maintained using Woodoc Penetrating Furniture Wax or Woodoc Antique Wax.

No: WD25/004

Dated: 14/08/12

Name:

Woodoc 25 - Polyurethane Floor Sealer - Clear Matt or Satin Finish.

Description:

Fills grain of the wood and gives a hard wearing matt or satin finish.

Coverage:

First coat 10-12 m²/litre. Subsequent coats 12-14 m²/litre. 3 coats (average) 3,3 m²/litre.

Application:

Preferably by brush. Clean brush with white spirit.

Dilution:

Dilution is not recommended, but should dilution be necessary, use only white spirit.

Drying Time:

Drying will vary, depending on moisture and atmospheric conditions.

Product Properties:

Clear, lead-free, indoor wood sealer. Formaldehyde-Free.

Wax Content: None.

Compatibility: White Spirit.

Non-Compatibility:

Acetone, Lacquer Thinners, Benzene and other solvents.

Packaging:

Clear, matt or satin: 1 litre, 2,5 litres and 5 litres. (20 or 200 litres available on request from dealer)

ALWAYS READ THE DIRECTIONS ON THE TIN BEFORE STARTING WORK.

FLAMMABLE. Keep out of reach of children. Harmful when consumed. Ingestion may cause chemical pneumonitis.

IMPORTANT: This product hardens through contact with air (oxygen). Replace lid firmly after use to prolong pot life.



Manufactured and marketed by:
Rekara Mills (Pty) Ltd
PO Box 16, Fort Beaufort 5720, South Africa
Tel +2746 645 1109 Fax +2746 645 1538

Europe: +44(0)1223 – 655 686

Email: info@woodoc.eu

www.woodoc.eu

Customer Service:

Office hours +44(0)1223 655 686

Email: info@woodoc.eu or visit www.woodoc.eu