


E-KDD Series Direct Draw Beer Dispensers

Model #E-KDD1-S

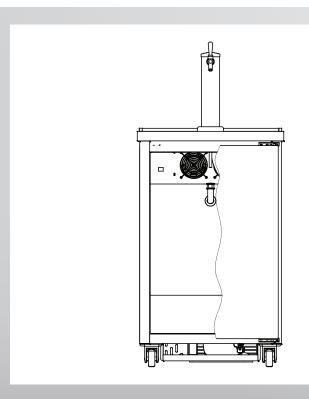

Special Features:

- ✓ 8.1 cu. ft. Capacity
- ✓ (1) Solid Swing Door & Tap Tower
- ✓ 1/2 Keg Capacity
- ✓ 3" Casters
- ✓ Stainless Steel Exterior
- ✓ R600a CFC-Free Refrigerant
- ✓ Forced Air Cooling With Large Fan Blades &
- Motor
 - Digital LED Temperature Control Panel & Display
- ✓ Removable Magnetic Door Gaskets
- ✓ CFC-Free Foam Insulation
- ✓ Electronic Thermostat
- ✓ Auto Electric Defrost
- ✓ Tested and conforms to NSF-7 Standards

Product Description:

The Empura E-KDD1-S is a commercial direct draw beer dispenser with a 8.1 cu. ft. capacity, ideal for holding one half-barrel keg. It features a single tap tower with a stainless steel faucet and an insulated, cold-air-channeled column to maintain beer temperature. The unit has a durable stainless steel exterior and galvanized interior walls. A forced-air cooling system using R600a refrigerant keeps temperatures between 33°F and 41°F. Key features include a digital LED thermostat, self-closing lockable door, and 3" casters for mobility. Operating on 115V, it meets NSF-7, cETLus, and ETL certification standards.

About Empura Direct Draw Beer Dispensers:

The Empura E-KDD Direct Draw Beer Dispensers are the perfect solution for serving ice-cold draft beer in bars, restaurants, and event spaces. Designed with a sleek stainless steel exterior and insulated interiors, these dispensers ensure optimal temperature retention for fresh, crisp pours every time. Equipped with direct-draw taps and spacious kegerator storage, they accommodate various keg sizes for versatility. Easy to maintain and built for durability, the Empura E-KDD beer dispensers offer a reliable and efficient way to enhance your beverage service!

Intended For Commercial Use Only. Empura assumes no liability for component failure, factory defects or any other damages for units installed in non-commercial foodservice or residential applications.







ino I E

Empura°

Empura E-KDD Series #E-KDD1-S

TECHNICAL SPECS

| Dimensions | |
|-----------------------|----------------------------|
| Overall Width | 24.1" |
| Overall Depth | 29.9" |
| Overall Height | 38.7" |
| Storage Capacity | 8.1 cu. ft. |
| Tap Tower Diameter | 3" |
| Tap Tower Height | 13.1" |
| Half Keg Capacity | Yes |
| Refrigeration | |
| Refrigerant | R600a CFC-Free Refrigerant |
| Temperature Range | 33°F to 41°F |
| Compressor Horsepower | 1/8 HP |
| CFC Free | Yes |
| Defrost Cycle | Automatic Electric Defrost |
| BTU (LBP) | 3.17 |
| Cooling Type | Air Cooled |
| | |

| Construction | |
|-------------------------|------------------|
| Display / Control Type | LED |
| Insulation | CFC-Free Foam |
| Exterior Materials | Stainless Steel |
| Number of Towers (Type) | 1 |
| Number of Doors | 1 |
| Casters | 3" |
| Countertop Type | Stainless Steel |
| Installation | Freestanding |
| Door Style | Solid Swing Door |
| Electrical | |
| V/HZ/Ph | 115V/60Hz/1PH |
| Amps | 2.2 |
| Plug Type | NEMA-5-15P |
| Shipping | |
| Ship Weight | 161 |

UNIT VIEW

6.29

23





11. 81 24. 09



