

Floorstanding with Brother Printer Mount

Assembly Instructions






Tools Required:

- Socket Driver
- 10mm Spanner **or adjustable spanner*

Sheet Code: BP-IM-057_REV1




Release Date: 09/01/2020

Copyright 2016 Spotspot Ltd. (T/A Bouncepad) all rights reserved. Confidential, no part of this publication may be reproduced or transmitted in any form without the written permission of the copyright holder.

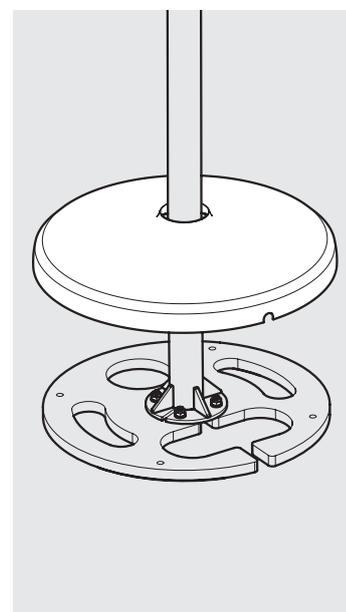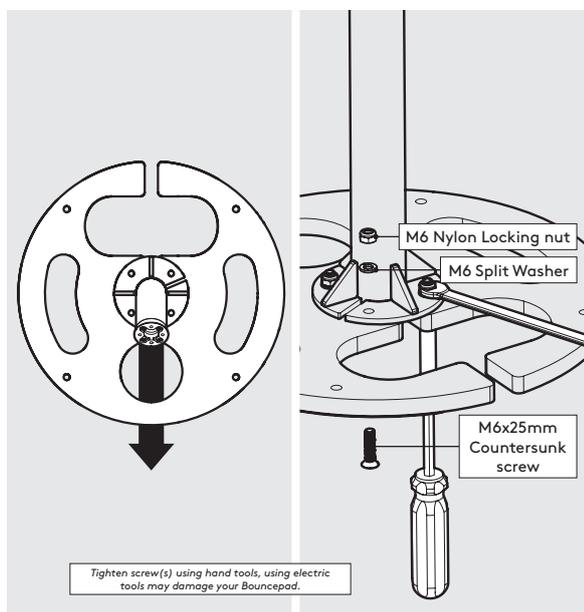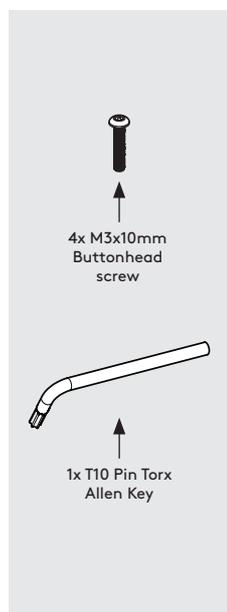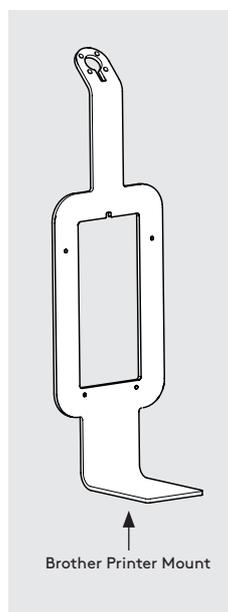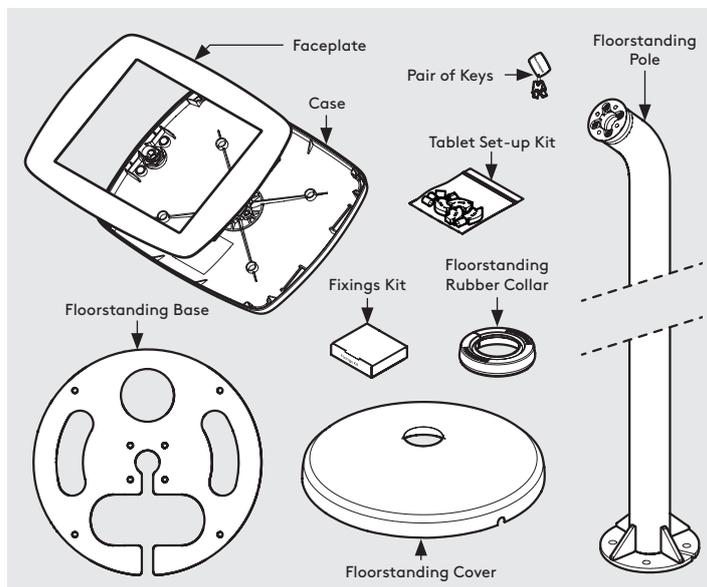

1 Orientate, locate and secure the Floorstanding Pole to the Floorstanding Base as shown. Ensure that all fixings are installed correctly.


2 Locate the Floorstanding Cover over the Floorstanding Pole.

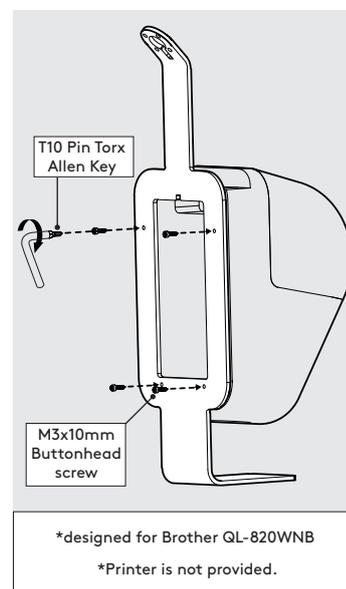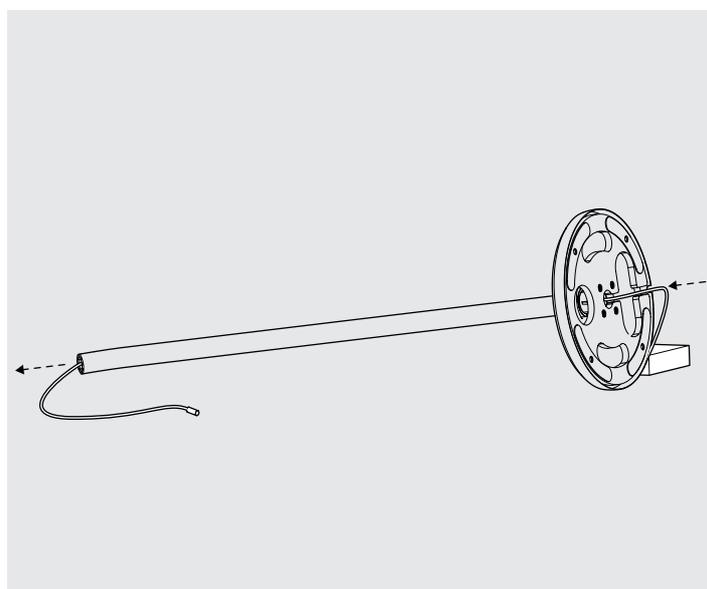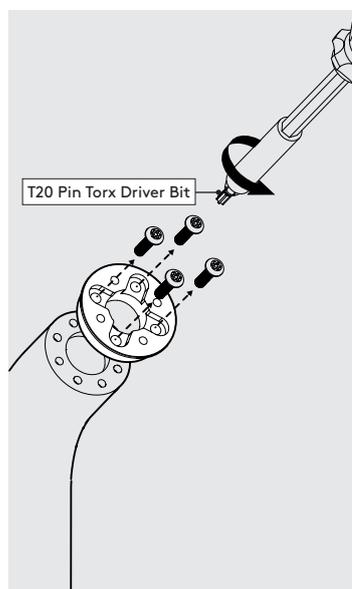


3 Remove Neck-Ring using T20 driver bit and Socket Driver

4 Feed the printer's power cable through the Floorstanding Pole


5 Attach the printer to the Printer Mount using M3x10mm Screws

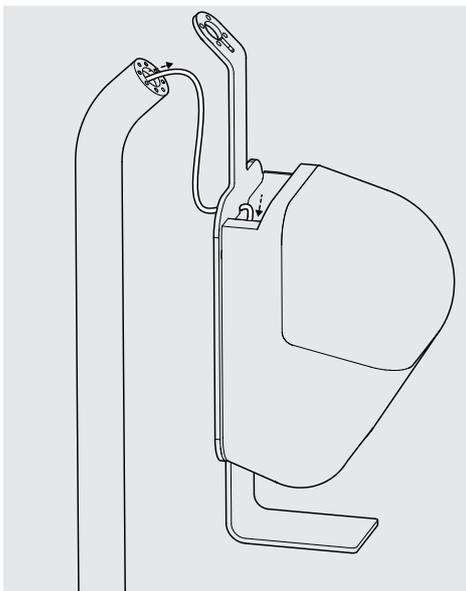


6 Feed power cable through Printer Mount and plug into Printer

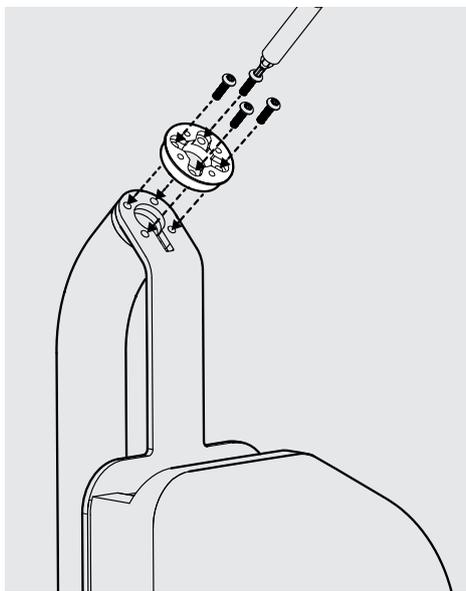


7 Re-attach Neck-Ring

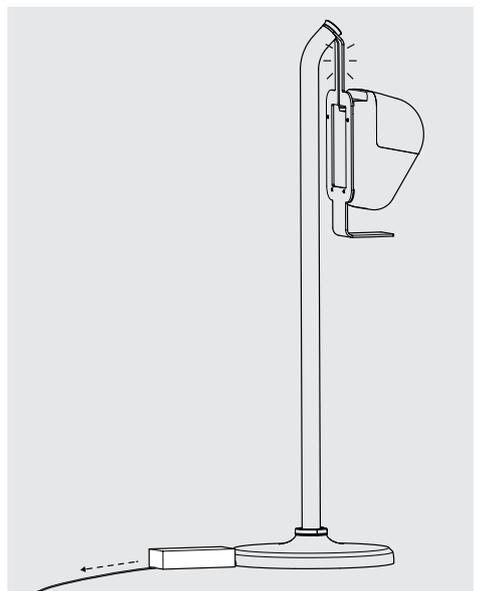


8 Pull cable back to remove any slack near the Printer Mount

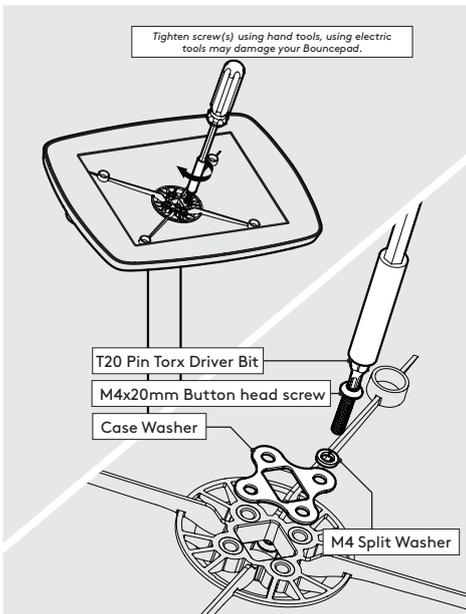


9 Locate and secure the Case onto the Mounting Arm as shown. Tighten by hand.

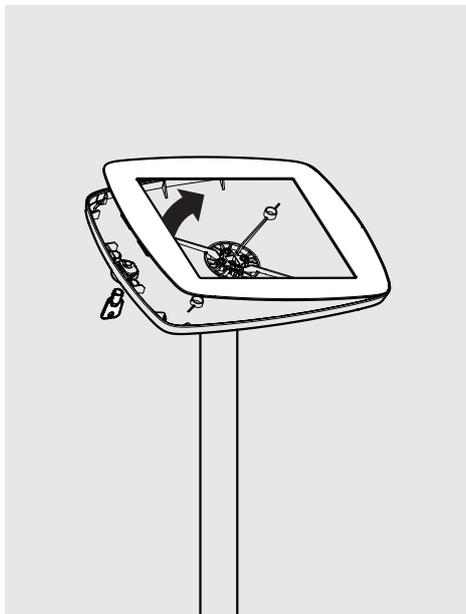


10 Unlock & remove the Faceplate from the Bouncepad Case.

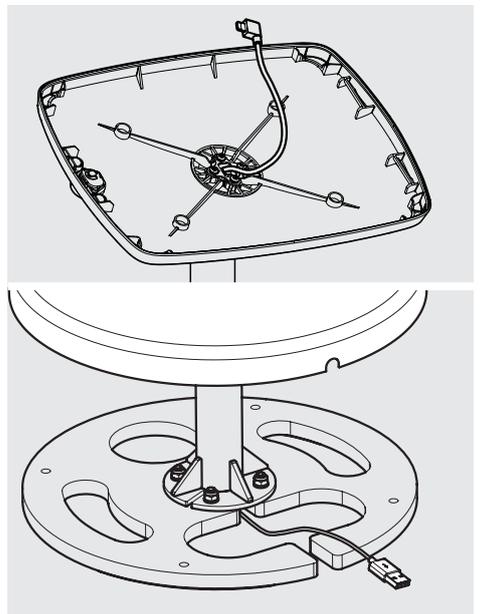


11 Feed the tablet power cable through the Case & Floorstanding Pole.

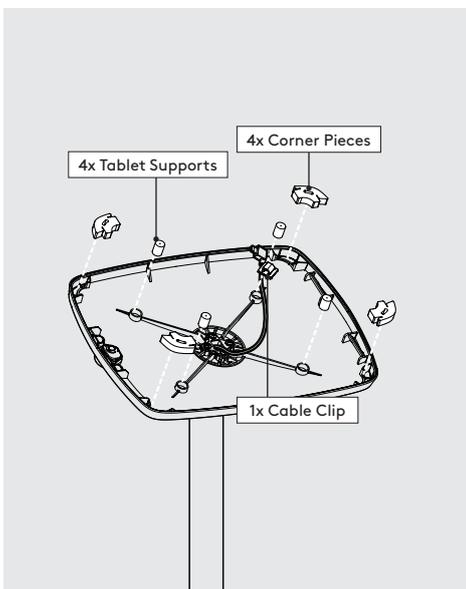


12 Install the Tablet Setup Kit. Each kit is specific per device & case.

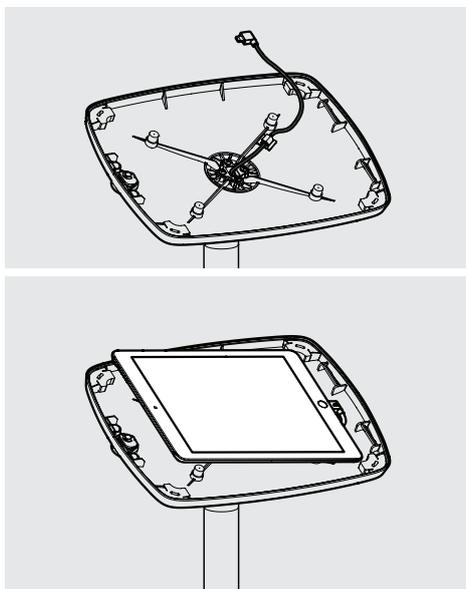


13 Install the tablet into the Case & connect to power.

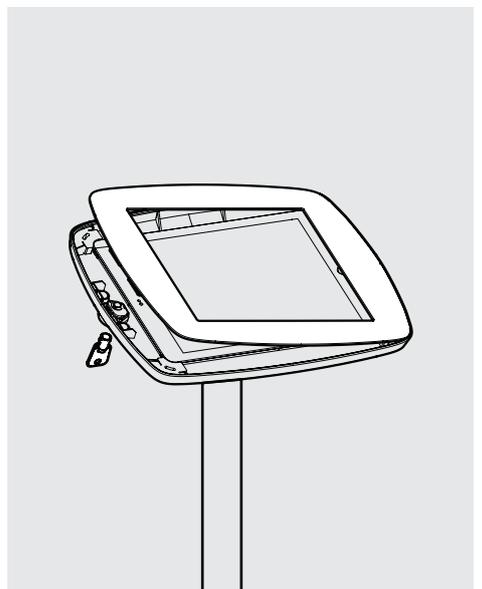


14 Locate and lock the Faceplate to the Case.

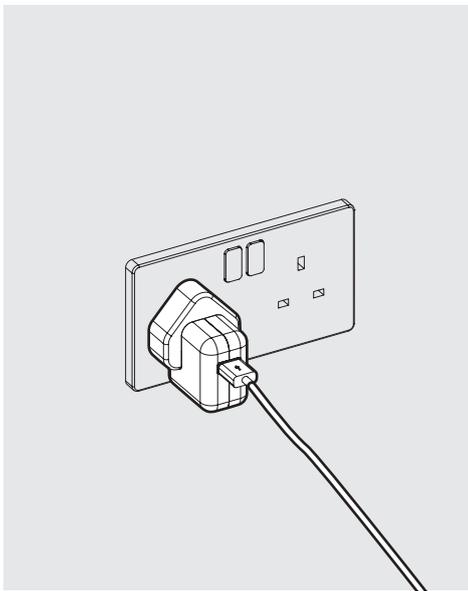


15.1 Connect the tablet power cable to its mains power source.

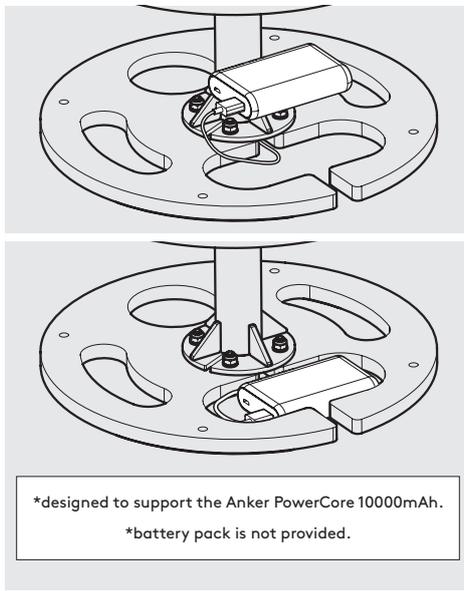

15.2 If installing a battery pack, connect the tablet cable and locate the pack into the Floorstanding Base.

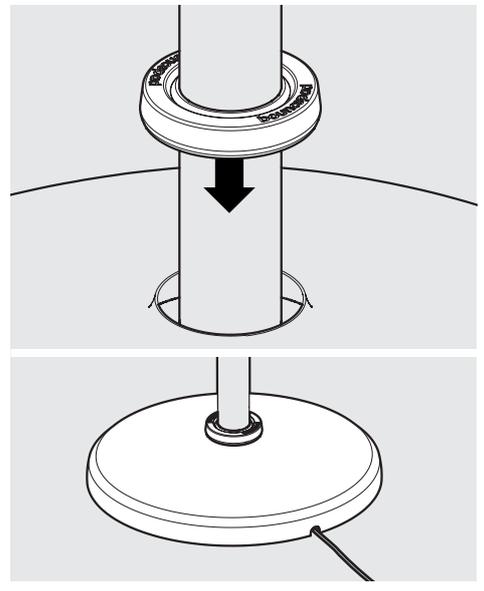

16 With the Floorstanding Cover on the ground, locate and fit the Floorstanding Rubber Collar.

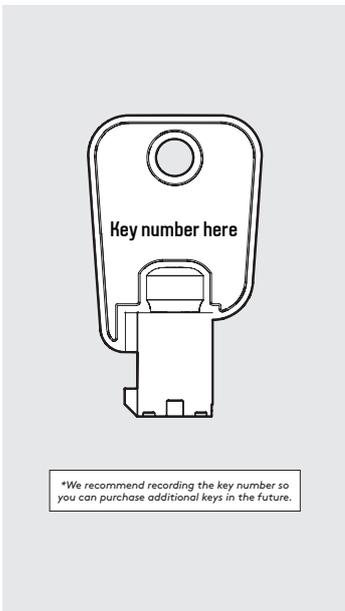

17 Installation is now complete.