

LED BULLET FLOODLIGHT

QUALITY IS OUR TOP PRIORITY!
5-year warranty for both 100-277V & 347-480V

UP TO
120lm/w

SPECIFICATIONS


Quality is Our Top Priority! >>



Model No.	5BF06	5BF12	5BF30	5BF40
Input Power	6W	12W	30W	40W
Input Voltage	100-277Vac 50/60Hz	100-277Vac 50/60Hz	100-277Vac 50/60Hz	100-277Vac 50/60Hz
Luminous Flux	≈872LM	≈1400LM	≈3600LM	≈4400LM
Efficiency	≈112LM/W	≈118LM/W	≈120LM/W	≈110LM/W
Beam Angle	3H3V/6H6V	3H3V/6H6V	3H3V/6H6V	6H6V
Replacement	20W MH/HPS	40W MH/HPS	100W MH/HPS	125W MH/HPS
LED Source	3030 LED			
Color Temp	3000K/4000K/5000K			
CRI	≥72			
Driver	UL,FCC,CE			
Power Factor (PF)	≥0.9			
Fixture Material	Aluminum+UV PC			
Fixture Surface	Bronze (White available if request)			
IP Rating	IP65			
Operating Temp	-20°C to 40°C			
Warranty	5 years			
Lifespan	>50,000h (L70)			
Qualifications	UL/cUL/CE available			

Easy Installation

Can be surface mounted directly to electrical boxes or posts with a 1/2" threaded bushing, and features a locking swivel arm for angle adjustment.

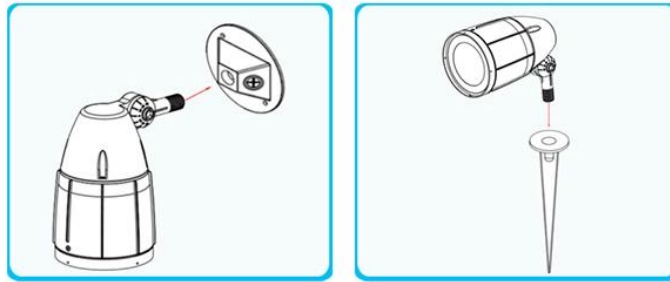

FEATURES

Quality is Our Top Priority! >>



Structure:

- Precise die-casting ADC 12 aluminum housing with integral cooling Fin.
- Waterproof & Durable High-temperature Silicone Gaskets.
- Used F1 PC lens, higher light efficacy.
- Superior Architectural Bronze Powder Coat Finish.

Electronic:

- High quality 3030 chips, deliver over 120 lumens per watt.
- Universal voltage: 100 - 277-Volt.
- To make the color more consistent, we always use the exact same bin for all the lights in a single project. We finer tune the binning.
- 100,000+ hours lifespan, top quality with 5 years warranty.

Function:

- UL 1598 listed for wet locations.
- Available in 2 distribution angles 3H3V/6H6V.
- Surge protector is available.
- Shroud optional when need to gather the lighting.
- UL/cUL/CE available

APPLICATION

Quality is Our Top Priority!>>

Green Inova®'s LED Bullet Flood light provides energy-efficient, directional lighting for landscape, facade, outdoor signage, and accent lighting, and many other commercial and residential applications.



Easy Installation

Can be surface mounted directly to electrical boxes or posts with a 1/2" threaded bushing, and features a locking swivel arm for angle adjustment.

