

# LINK<sup>®</sup> | Ramps

SWIVEL RAMP  
BIFOLD & TRIFOLD MOUNTED RAMPS  
PORTABLE RAMPS



driven to *outperform*<sup>®</sup>

# Link Swivel Ramp

## LSR90 Series Swivel Ramp

With 180° rotation and two storage locations, the Link Swivel Ramp offers flexibility for loading and unloading any cargo. It mounts in the rear stored position using a mounting plate combined with one of Link's durable spring-assist bifold ramps.

The LSR90 also incorporates safety and efficiency into its design. The primary latching module can be easily removed to provide open floor space, and the quick-release lever enables the ramp to be unlatched when in the wheel well position, without requiring users to bend, lift or enter the vehicle.

RAMP PART #	MODEL # (Style-WW-L)	CAPACITY (Lbs)	WEIGHT (Lbs)
-------------	----------------------	----------------	--------------

### LSR90 180° Swivel (Bifold Design)

7859-2002	LSR90-30-99	1500	157
7859-2012	LSR90-30-108	1250	163
7859-2022	LSR90-30-117	1000	169
7859-2001	LSR90-36-99	1500	167
7859-2011	LSR90-36-108	1250	173
7859-2021	LSR90-36-117	1000	179
7859-2003	LSR90-47-99	1500	225

1. Ramp tucks behind wheel well for easier loading
2. Swivels outside the vehicle for convenient access
3. Ramp locks upright at the rear door like a traditional ramp
4. 30"-47" widths available




- A. Quick-release feature for latching mechanism
- B. Detachable latching mechanism that provides secure transport, while also allowing full floor access when needed
- C. Rear latching mechanism for secure storage in the wheel well position



See swivel ramp in action at [linkmfg.com/products/ramps](http://linkmfg.com/products/ramps)



# Mounted Ramps

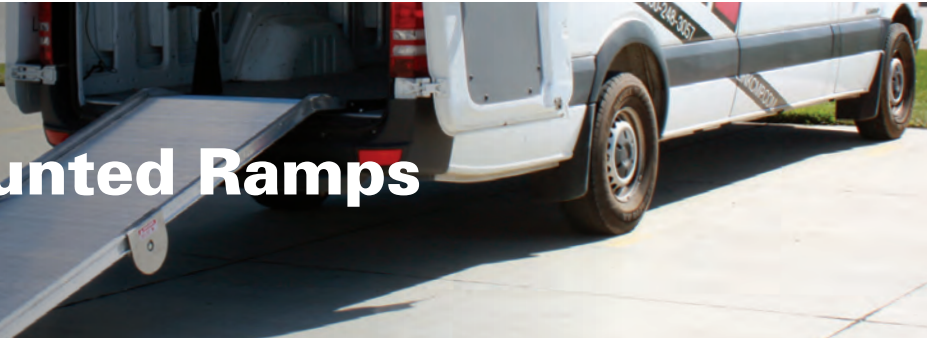

## LB20 Series Bifold Mount

This high-strength aluminum, surface-mount ramp installs easily into any vehicle with a flat surface. The unique design stores vertically and only takes seconds to position for use - increasing efficiency while reducing dangerous lifting and equipment damage.

- Optional Wheel Kit available (Part #78425A04). This option helps transition the ramp more smoothly when deploying it on the ground.



RAMP PART #	MODEL # (Style-W-L)	CAP (Lbs)	WEIGHT (Lbs)
<b>LB20 Flat Mount (Bifold Design)</b>			
7851-A004	LB20-24-72	1250	84
7851-A000	LB20-24-81	1250	90
7851-A010	LB20-24-90	1250	96
7851-A011	LB20-24-99	1250	102
7851-A012	LB20-24-108	1250	108
7851-A013	LB20-24-117	1000	114
7851-A005	LB20-30-54	1250	82
7851-A006	LB20-30-72	1250	94
7851-A002	LB20-30-81	1250	100
7851-A015	LB20-30-90	1250	106
7851-A016	LB20-30-99	1250	112
7851-A017	LB20-30-108	1250	118
7851-A018	LB20-30-117	1000	124
7851-A019	LB20-30-126	750	130
7851-A008	LB20-36-72	1250	104
7851-A001	LB20-36-81	1250	110
7851-A021	LB20-36-90	1250	116
7851-A022	LB20-36-99	1250	122
7851-A023	LB20-36-108	1250	128
7851-A024	LB20-36-117	1000	134
7851-A025	LB20-36-126	750	140
7851-A026	LB20-36-135	750	146
7855-4012*	LB20-36-81*	1250	110
7855-4013*	LB20-36-90*	1250	116
7842-A300	—	—	—
7842-A000	—	—	—

SPRING PART #	SPRING ASSIST MODEL # (Style-W-L)	CAPACITY (Lbs)	WEIGHT (Lbs)
<b>LB20 with Spring Assist (Reduces Lift Force)</b>			
—	—	—	—
—	—	—	—
—	—	—	—
78425-A11	LB20-24-99SA	1250	147
78425-A09	LB20-24-108SA	1250	153
78425-A07	LB20-24-117SA	1000	159
—	—	—	—
—	—	—	—
—	—	—	—
78425-A11	LB20-30-90SA	1250	150
78425-A09	LB20-30-99SA	1250	157
78425-A09	LB20-30-108SA	1250	163
78425-A07	LB20-30-117SA	1000	169
78425-A02	LB20-30-126SA	750	175
—	—	—	—
78425-A11	LB20-36-81SA	1250	155
78425-A09	LB20-36-90SA	1250	161
78425-A07	LB20-36-99SA	1250	167
78425-A07	LB20-36-108SA	1250	173
78425-A02	LB20-36-117SA	1000	179
78425-A02	LB20-36-126SA	750	185
78425-A02	LB20-36-135SA	750	191
—	—	—	—
—	—	—	—
STANDARD	LB20-42-108SA	1250	225
STANDARD	LB20-47-99SA	1500	225

\* Ford Transit Connect prior to 2014




## LB10 Series Side Mount

The high-strength aluminum ramp mounts in vans with a side step and easily stores in the “dead” space above the step. The user-friendly design makes installation a snap, and requires only a few seconds to position for use - making you more efficient.

RAMP PART #	MODEL # (Style-W-L)	CAPACITY (Lbs)	WEIGHT (Lbs)
-------------	---------------------	----------------	--------------

### LB10 Side Step Mount (Bifold Design)

7850-A004	LB10-24-81	1000	82
7850-A006	LB10-30-81	1000	92
7850-A010	LB10-30-90	1000	98
7850-A008	LB10-36-81	1000	102
7850-A011	LB10-36-90	1000	108

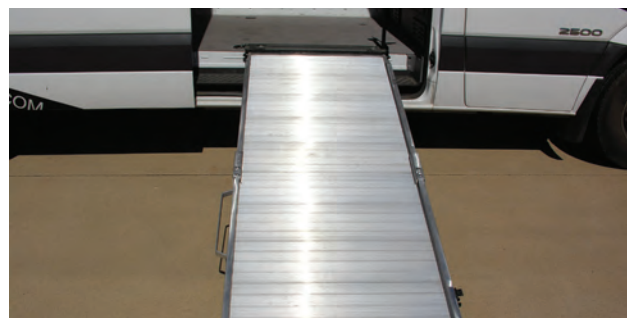

## LT30 Series Trifold Mount

The trifold design of this flat surface mount ramp allows it to easily store vertically inside the vehicle. The adjustable leg gives the option for shallow load angles. If needed, the ramp can be removed in less than a minute.

RAMP PART #	MODEL # (Style-W-L)	CAPACITY (Lbs)	WEIGHT (Lbs)
-------------	---------------------	----------------	--------------

### LT30 Flat Mount (Trifold Design)

7852-4A01	LT30-24-119	1000	110
7852-4A02	LT30-30-119	1000	125
7852-4A03	LT30-36-119	1000	140



# link® | Portable Ramps



## LS50 Series Heavy Duty

This heavy-duty aluminum ramp is portable and perfect for general use. The LS50 is quick to position, and allows you to reduce dangerous lifting and equipment damage.

## LWS40 Series Lightweight

This lightweight ramp is ideal for loading and transporting lighter products and machinery. It works perfectly for rear or side loading, and is 30% lighter than our LS50 Model.

RAMP PART #	MODEL # (Style-W-L)	CAPACITY (Lbs)	WEIGHT (Lbs)
-------------	---------------------	----------------	--------------

### LS50 Heavy Duty (Straight Design)

7854-A004	LS50-24-81	1000	56
7854-A005	LS50-24-90	1000	62
7854-A007	LS50-24-108	750	75
7854-A013	LS50-30-72	1000	56
7854-A015	LS50-30-90	1000	71
7854-A016	LS50-30-99	750	78
7854-A017	LS50-30-108	750	85
7854-A024	LS50-36-81	1000	72
7854-A025	LS50-36-90	1000	80
7854-A027	LS50-36-108	750	96

### LS50 Heavy Duty (Folding Design)

7854-B003	LS50-24-72 F	1000	49
7854-B005	LS50-24-90 F	1000	62
7854-B014	LS50-30-81 F	1000	64
7854-B015	LS50-30-90 F	1000	71
7854-B016	LS50-30-99 F	750	78
7854-B017	LS50-30-108 F	750	85
7854-B018	LS50-30-117 F	750	92
7854-B025	LS50-36-90 F	1000	80
7854-B026	LS50-36-99 F	750	88
7854-B027	LS50-36-108 F	750	96

RAMP PART #	MODEL # (Style-W-L)	CAPACITY (Lbs)	WEIGHT (Lbs)
-------------	---------------------	----------------	--------------

### LWS40 Lightweight (Straight Design)

7854-C024	LWS40-24-63	500	29
7854-C025	LWS40-24-72	500	33
7854-C026	LWS40-24-81	500	37
7854-C027	LWS40-24-90	500	41
7854-C040	LWS40-30-72	500	39
7854-C041	LWS40-30-81	350	44
7854-C042	LWS40-30-90	350	49
7854-C043	LWS40-30-99	350	53
7854-C045	LWS40-30-117	350	63
7854-C056	LWS40-36-81	350	51
7854-C057	LWS40-36-90	350	56

### LWS40 Lightweight (Folding Design)

7854-D001	LWS40-24-72F	500	33
7854-D002	LWS40-24-81F	500	37
7854-D003	LWS40-24-90F	500	41
7854-D010	LWS40-30-72F	500	39
7854-D012	LWS40-30-90F	350	49
7854-D014	LWS40-30-108F	350	58
7854-D022	LWS40-36-99F	350	62
7854-D023	LWS40-36-108F	350	67

# Driven To Outperform

When you choose our Cargo Management Products, you choose the very best. From innovative design, collaborative engineering and rigorous testing, to unmatched customer service, Link® outperforms so you can perform better.

Our components are designed for reliability and durability using state of the art manufacturing processes. Our extensive line of ramps provides safe, durable, economical solutions for loading and hauling. Each Link ramp is engineered, tested and built with safety in mind. Whether you require a swivel, bifold, trifold, lightweight, heavy-duty, side mount or a customized solution, you can be confident that each Link ramp is built to the highest quality standards.

		Vehicle Floor Height (Inches)															
		18"	20"	22"	24"	26"	28"	30"	32"	34"	36"	38"	40"	42"	44"	46"	48"
Ramp Length	54"	19°	22°	24°	26°	29°	31°	34°	36°	39°	42°	45°	48°	51°	55°	58°	63°
	63"	17°	19°	20°	22°	24°	26°	28°	31°	33°	35°	37°	39°	42°	44°	47°	50°
	72"	14°	16°	18°	19°	21°	23°	25°	26°	28°	30°	32°	34°	36°	38°	40°	42°
	81"	13°	14°	16°	17°	19°	20°	22°	23°	25°	26°	28°	30°	31°	33°	35°	36°
	90"	12°	13°	14°	15°	17°	18°	19°	21°	22°	24°	25°	26°	28°	29°	31°	32°
	99"	10°	12°	13°	14°	15°	16°	18°	19°	20°	21°	23°	24°	25°	26°	28°	29°
	108"	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	21°	22°	23°	24°	25°	26°
	117"	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	20°	21°	22°	23°	24°
	126"	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	19°	20°	21°	22°
	135"	8°	9°	9°	10°	11°	12°	13°	14°	15°	15°	16°	17°	18°	19°	20°	21°

**Ease of Loading:**  Easy for Most Loads  Average for Most Loads  Somewhat Difficult for Large Loads  Only Recommended for Light Loads



driven to *outperform*®