


# MALONE®

CHANGING THE WAY YOU GET THERE



## Installation & Loading Instructions - Please Read Before Beginning

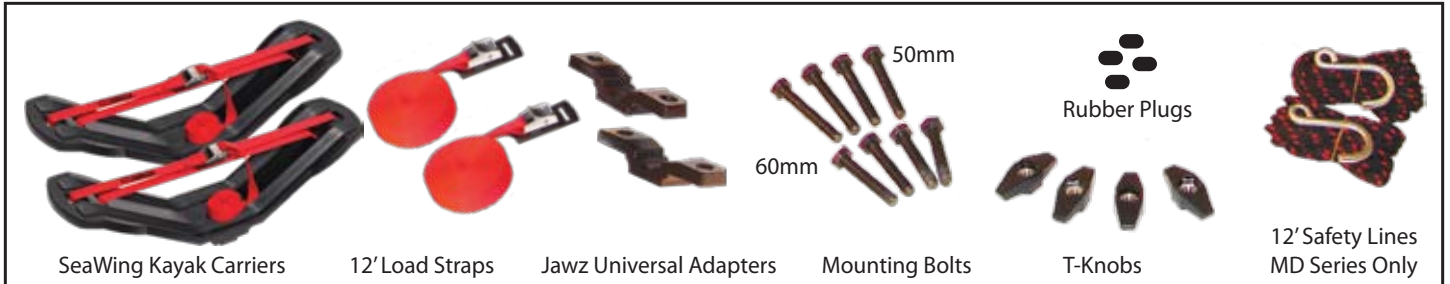

### Step 1: Installing Carriers to Cross Bars

· Insert a Mounting Bolt into one of the top side hex holes. See image 1.

· Insert Mounting Bolt through one hole of a Jawz Mounting Adapter and loosely apply a T-knob. See image 2.



· Place the carrier onto the front cross bar. Swing the Jawz under the cross bar as shown. See image 3.

# MALONE<sup>®</sup>

CHANGING THE WAY YOU GET THERE

## Installation & Loading Instructions - MPG107M (MD) SeaWing™



- Insert a second Mounting Bolt into the top side unused carrier hex hole and down through the Jawz mounting adapter. Apply a second T-knob and slightly tighten until the carrier is secure. Repeat steps 1-4 for the 2nd carrier and rear cross bar. See image 4.

- Confirm the carriers are in alignment. Firmly tighten the T-knobs until both carriers are securely fixed to the cross bars. See image 5.



- Insert the four Rubber Plugs into the four top side hex holes in the two carriers. See image 6.

### Step 2: Loading the Kayak

- Route the free end of a 12' Load Strap down through the top of the outer most strap slot and back up through the inside slot of the carrier. Pull the free end until there is an even loop. Repeat for the second carrier. See image 7.



# MALONE<sup>®</sup>


CHANGING THE WAY YOU GET THERE

## Installation & Loading Instructions - MPG107M (MD) SeaWing<sup>™</sup>



- Place the straps parallel to the carriers with the front strap loop on the windshield and the rear strap loop on the back of the vehicle. See image 8.

- Place a mat on the rear of the vehicle to protect the finish. Lift the front of the kayak onto the vehicle. Lift the rear of the kayak up and slide it into the carriers. See image 9.

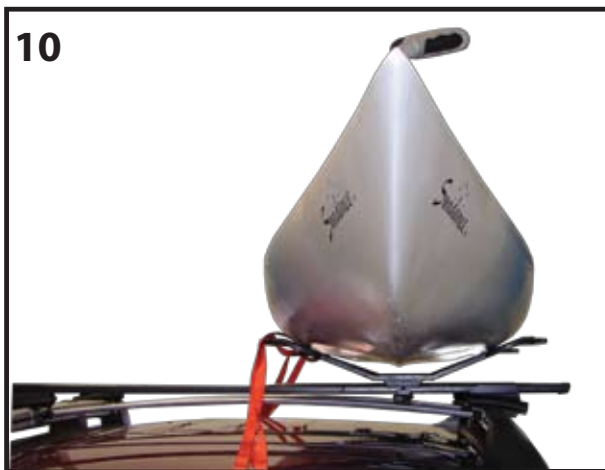

- Position kayak so that the cockpit is evenly centered between the front and rear carriers. The bottom of the kayak should be slightly elevated above each of the carriers and held by the sides of the carriers. See image 10.

- Place the strap loops over the kayak so that each loop is positioned directly over a carrier. See image 11.



# MALONE<sup>®</sup>

CHANGING THE WAY YOU GET THERE

## Installation & Loading Instructions - MPG107M (MD) SeaWing™



- . Pull the free end of each strap loop down until the buckles are positioned half way up the side of the kayak. Thread each free end down and through the top of the outside slot and back up through the bottom of the inside slot. See image 12.

- . Thread the free strap ends up and through the buckles. Pull down to tighten. Dress any extra strap down and around the cross bars. See image 13.



- . For MD series: Install the bow & stern safety lines per the attached instructions.

### IMPORTANT NOTES:

For added stability for larger kayaks, dress the straps down under the cross bars before bringing them back up through the slots in steps 7 and 12.

Safety tie-downs are required for all transport. If your kit did not include safety tie-downs, we strongly recommend the use of the Malone MPG316 Sentry Ratchet Tie-Down System.

Always check mounting hardware, load straps and safety tie-down lines for proper and secure attachment before transport. Use of this product for any other application other than kayak transport voids warranty.

# MALONE®

CHANGING THE WAY YOU GET THERE


## MPG370 BOW & STERN LINE KIT



### Attach hook to rope (steps A-D)



Thread free end of cord through hook.



Create a "left over right" knot & tighten.



Create a "right over left" knot & tighten.



Pull to test for knot strength.


### Attach and dress rope to vehicle and boat (steps E-O)



Attach S-hook to vehicle tow ring or other sturdy body part.



Keeping the rope tight and S-hook in place, thread the free end up and through a strong point on the kayak



Make a loop in the rope 12" to 14" away from the kayak or canoe.



Bend the loop over leaving a large opening as shown.



Pass the loop through the opening.



Pull to create a tight knot.



Thread the free end of the rope through the loop.



Pull the free end up until the rope is sufficiently tight.



Hold the rope secure with one hand.



Form a knot with the free end and tighten. Form a second knot for safety purposes.



The line should be tight and secure. Repeat for second tie-down.

# MALONE<sup>®</sup>

## CHANGING THE WAY YOU GET THERE

### Limited Lifetime Warranty

*The Malone Auto Racks (Malone) Limited Lifetime Warranty covers certain Malone-brand products that have been specifically identified for inclusion in the program and is effective for as long as the original retail purchaser owns the product. This warranty is terminated when the original retail purchaser sells or otherwise transfers the product to any other person or entity.*

Subject to the limitations and exclusions described in this warranty, Malone will remedy defects in materials and/or workmanship by repairing or replacing, at its option, a defective product without charge for parts or labor. Malone may elect, at its option, not to repair or replace a defective product but rather issue to the original retail purchaser a refund equal to the purchase price paid for the product, or credit to be used toward the purchase of a replacement Malone product.

This warranty does not cover, and no warranty is given for defects or problems caused by normal wear and tear which includes but is not limited to surface (aesthetic) metal corrosion, scratches, dents, deformities, accidents, unlawful vehicle operation, or any modification of a product not performed or authorized in writing by Malone.

In addition, this warranty does not cover problems resulting from conditions beyond Malone's control including, but not limited to, theft, misuse, overloading, or failure to assemble, mount or use the product in accordance with Malone's written instructions or guidelines included with the product available to the original retail purchaser.

No warranty is given for Malone products purchased outside of the United States, Canada and Mexico.

If the product is believed to be defective, the original retail purchaser should contact the Malone dealer from whom it was purchased, who will give the original retail purchaser instructions on how to proceed. If the original retail purchaser is unable to contact the Malone dealer, or the dealer is not able to remedy the defect, the original retail purchaser should contact Malone by email at [technical@maloneautoracks.com](mailto:technical@maloneautoracks.com).

In the event that the product must be returned to Malone, a technician at the email address above will provide the original purchaser with return shipping instructions. The original purchaser will be responsible for the cost of mailing the product to Malone. In order to receive any remedy under this warranty, a copy of the original purchase receipt, a description of the defect and a return address must be provided.

### Disclaimer of Liability

Repair or replacement of a defective product, or the issue of a refund or credit (as determined by Malone) is the original retail purchaser's exclusive remedy under this warranty. Damage to original purchaser's vehicle, cargo, or property, and/or to any other person or property is not covered by this warranty.

This warranty is expressly made in lieu of any and all other warranties, express or implied, including the warranties of merchantability and fitness for a particular purpose.

Malone's sole liability is limited to the remedy set forth above. In no event will Malone be liable for any direct, indirect, consequential, incidental, special, exemplary, or punitive damages, or, for any other damages of any kind or nature (including but not limited to, lost profits, lost income or lost sales).

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not be applicable. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

In addition, all vehicular transports are potentially hazardous. Any person using MALONE products are personally responsible for following the given directions for use, installation and accepts full responsibility for any and all damages or injury of any kind including death, which may result from their use.