


TOOLS AND MATERIALS REQUIRED



PARTS BAG

	P4	3PCS
	(A)	1PC
	(B) #8-32*25MM	2PCS
	(C)	1PC
	(D)	1PC
	(E)	1PC
	(F) #4-14*45MM	1PC
	(G)	1PC
	(H)	1PC
	(I)	1PC
	(J) 3' Chain	1PC

PRODUCT ILLUSTRATION

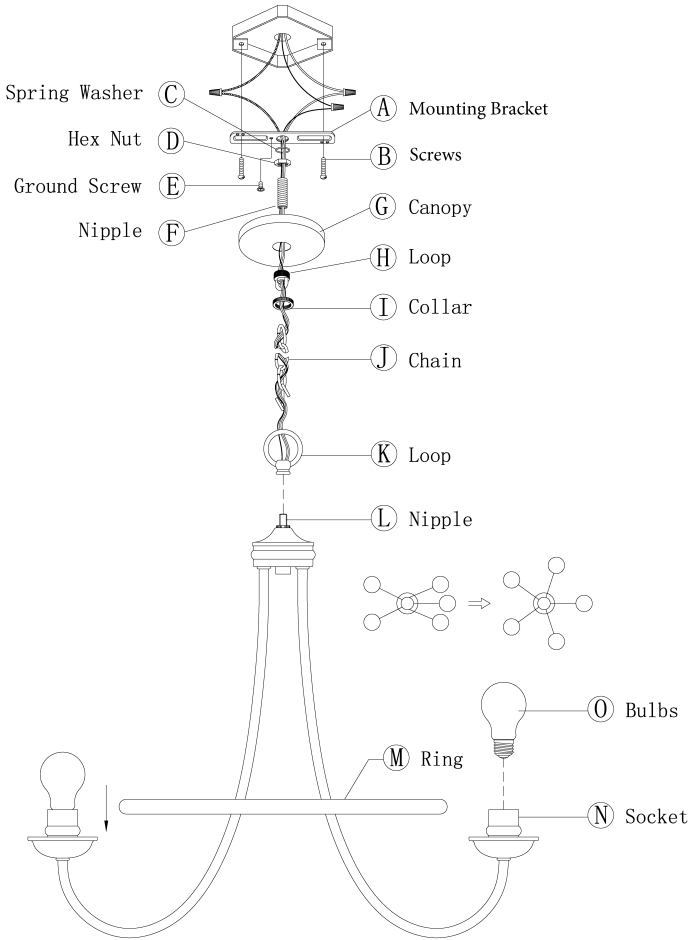

SAFETY INFORMATION AND PREPARATION

To reduce the risk of electric shock, ensure electricity has been turned off at the circuit breaker or fuse box before beginning. All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. All installation work should be done by an accredited professional. Use only the specified bulbs. Do not exceed the maximum wattage.

NOTE- The fixture body is pre-assembled. Remove all of the contents from the carton. See the important notes above. Make sure that no parts are missing by referencing the parts pack and content list.

1. ASSEMBLY

- Start by unfolding the rods, then thread the wires through the fix screw and canopy.
- Locate the shade and remove the pre-assembled socket ring from the fixture, attach the shade and screw the socket ring onto the fixture.
- Next, screw in the light bulb then place and cover the light bulb with glass. Then, place the metal trim on top of the glass.
- Next, screw on the thumb screw as shown in the illustration. Continue to step 2.

2. CONNECTING THE WIRES

- Connect the black supply wire to black fixture wire, white supply wire to white fixture wire. Connect the fixture ground wire with wire nut. Wrap all wire connections with electrical tape for secure connection.
- After wires are connected, tuck them carefully inside the junction box. Place the mounting bracket over the junction box and feed fixture screws through two holes of the fixture mounting strap until they protrude out from the back plate approximately 1/4" and secure with two cap nuts.
- Raise canopy to the ceiling/wall and secure screws attaching canopy to junction box as shown in illustration.

3. FINISHING THE INSTALLATION

- Match the threaded holes of mounting bracket to the spacing of the holes on the junction box as shown in illustration.
- Restore power at the circuit breaker and turn light switch on to activate this fixture.

Care and maintenance- Use damp and clean cloth to wipe the surface of the fixture.

Contact seller with any further questions regarding warranty or damaged product. Contact a licensed electrical professional for assistance with junction box or connection issues

CONTENTS LIST

A) Mounting Bracket	F) Nipple	K) Loop
B) Screws	G) Canopy	L) Nipple
C) Spring Washer	H) Loop	M) Ring
D) Hex Nut	I) Collar	N) Socket
E) Ground Screw	J) Chain	O) Bulbs

REPLACEMENT BULB

5 x 60W E12