




## PIEZOMETRIC LEVEL SENSOR

### For clean water

PIEZO ST probes are intended for the measurement of reservoirs, rivers and groundwater.

The level measurement is carried out by **measuring the differential pressure between the surface of the liquid and the position of the submerged transmitter**.

	2 m H <sub>2</sub> O	4 m H <sub>2</sub> O	10 + m H <sub>2</sub> O
Allowable overpressures	20 f	25	10
Precision	1 %	1 %	0,5 %
Temperature error	0,3% (10°)	0,3% (10°)	0,2% (10°)
Medium temperature range	-25 ... + 40°C (PUR cable) 0 ... + 75°C (ETFE cable)		
Output signal	4/20mA		
Electric characteristics	8 - 36 VDC		
Hystérésis	0,05%		
Sensor	Hastelloy C276		
Housing	Inox AISI 316 L Stainless steel AISI 316 L		
Type of cable	PU		

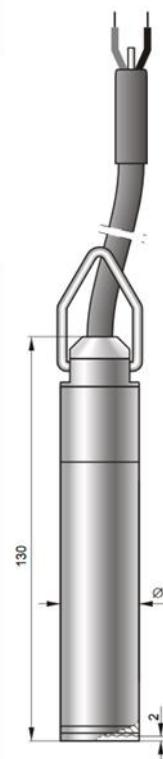

Dimension