
## [AQT-15/20 B1] Float Valve

For medium sized water tanks & water troughs. Solves the problem of high cost by using a brass and stainless steel valve. Anti corrosion, rust-proof and UV resistant. Larger flow rate than the AQT15H and AQT20H.



Model	Thread Size	Valve Material	Ball Material	Ball Diameter	Plug Material	Pressure	Water. Temp	Flow Rate	Length (max)
AQT15B-1	1/2″ BSP	ABS	PE	50mm	NR	0.05-1.0 MPa	-35°C to +75°C	60 (P=0.6 Mpa)	19.60 cm
AQT20B-1	3/4″ BSP	ABS	PE	50 mm	NR	0.05-1.0 MPa	-35°C to +75°C	60 (P=0.6 Mpa)	19.60 cm



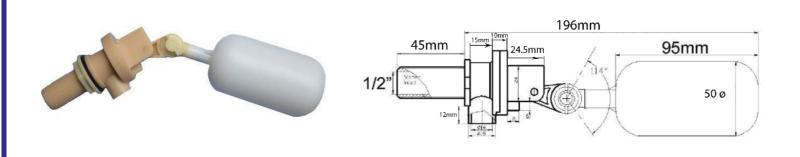

Distributed by: PVL Ltd - Crowborough, East Sussex, TN6 2NQ, UK Switched on to Industry T: +44 (0)1892 664499 F: +44(0)1892 663690 E: sales@pvl.co.uk W: www.pvl.co.uk