[MFS25-J] Top Entry Level Switch

Material	
Stem	P.P.
Float	P.P. foamed
Stopper	SUS304 (P.P.)
Nut	P.P.

Specification		
Temperature Range (Atm. Pressure)		-10ºC ~ +80ºC
Pressure Resistance (Room Temp.)		0.2MPa
Specific Gravity of the liquid		Heavier than 0.75
Electric Specs.	Max. Contact Capacity	50W DC/AC
	Max. Voltage	300V DC/AC
	Max. Current	0.5A DC/AC

Dimension

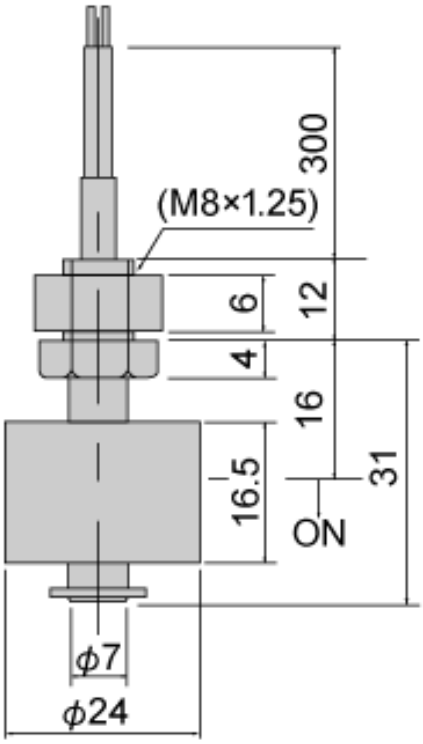

Distributed by: PVL Ltd - Crowborough, East Sussex, TN6 2NQ, UK
T: +44 (0)1892 664499 F: +44(0)1892 663690 E: sales@pvl.co.uk W: www.pvl.co.uk