






PKT30

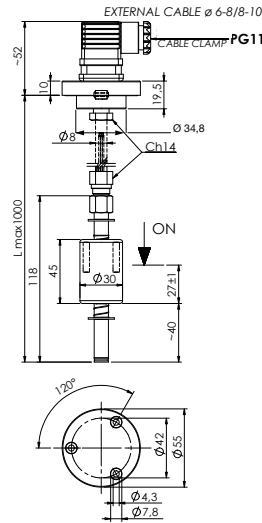

PKT31



PKT32

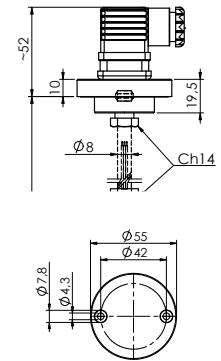

Flange	PART NUMBER
	3 C ORANGE ——— 2 LEVEL WHITE ——— 1 THERMOSTAT BROWN
3 holes	PKT30082 - ABB
1" Gas	PKT31082 - ABB
2 holes	PKT32082 - ABB
A = Thermostat electric contact 1 = N.O. 2 = N.C. BB = Thermostat temperature in °C 40/50/60/70/80°C	
The contact can be converted from N.C. to N.O. by rotating the float upside down	
PK level sensor can be built by the customer connecting the two parts of the sensor with a brass tube 8 x 6 mm diameter, using the olive fittings provided. The tube must be provided by the customer. Grounding must be fasten by assembling system	

For customized version (temperature > 100°C, etc.) please contact our Customer Service.

Use	Mineral oils - Fuels - Water
Fixing	Anodized Aluminum
Float	Foamed nylon (for pressure > 1 bar use NBR float)
Seeger	Phosphorous bronze
Type of contact	Reed N.O./N.C. (SPDT) - Thermostat
Max switch. capacity	80 W (50 W SPDT)
Max switch. current	1 A (1 A SPDT)
Max switch. voltage	250 Vac (220 Vac SPDT)
Protection degree	IP65
with connector according to UNI EN 175301-803 (DIN43650)	
Fluid specific weight	> 0,75
Working temperature	-20°C / +100°C
Weight	~ 220 gr