




PNEUMATIC LEVEL SWITCH FIG. 572.



- Vertical pneumatic level with instant open and close (level may be adjusted).
- Mechanical operation, **(no electronic systems)**
- Maximum and minimum level adjustment.
- Metal box.
- Parts which are in contact with the fluid in the tank, made of stainless steel (**AISI-316**).
- Fixing thread 1" or coupling connection piece.
- Tubular air connections 1/8"x 8 mm. on request male thread 1/8 ".
- Standard length 500 mm. (Other measurements available on demand).
- Stainless steel float Ø 160).
- Minimum working pressure: 2 bar.
- Maximum working pressure: 6 bar.
-  II 2GD c T6

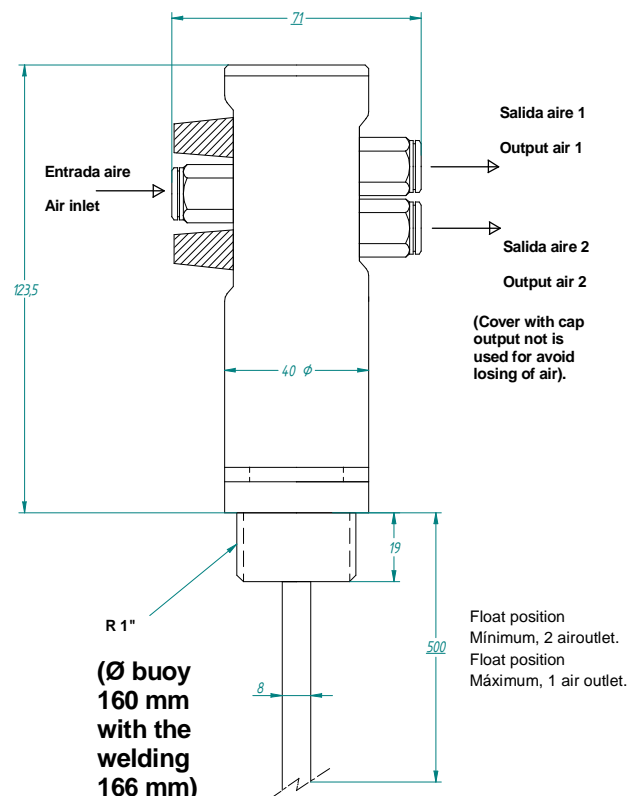

GENWEC WASHROOM, S.L.
VALVULAS CT
 Rda. Shimizu, nº2 nave 4 Pol. Ind. Can 1
 08233 Vacarisses
 Barcelona (España)
 Tel. 93 8280444 Fax. 93 8280450 E-
 mail- comercial@valvulasct.com