


FIG. 100 FLOAT VALVE

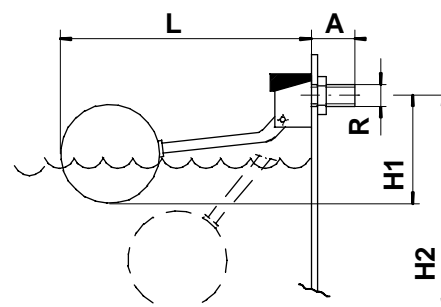

- H1** – Corresponds to the closed valve, the real value depends on the pressure when closed and the liquid density used.
H2 – Corresponds to the open valve when the float is in its lowest position.

Opening [mm]	DIMENSIONS FIG. 100					MASS WITHOUT FLOAT [kg]	Ø SPHERICAL BUOYS For pressure P = 10 bar Ø [mm]
	[Inches]	[mm]					
	R	A	L	H1	H2		
10	3/8" G	32	300* 316	70 132	260	0,107	90
15	1/2" G	35	405* 422	124 180	370	0,175	110
20	3/4" G	42	485* 513	148 207	420	0,300	160
25	1" G	45	562* 593	150 220	496	0,366	160
32	1 1/4" G	53	580* 611	170 235	496	0,464	160

* Lengths of the float in stainless steel.

Opening [mm]	FIG. 100 WATER FLOW [l/h]						
	Pressure [bar]						
	1	2	3	4	6	8	10
3/8"	1 132	1 669	1 904	2 169	2 656	2 825	3 082
1/2"	2 829	3 998	4 895	5 657	6 790	7 978	8 938
3/4"	4 838	6 842	8 370	9 677	11 805	13 993	15 289
1"	6 934	9 919	12 147	14 068	17 167	19 654	21 945
1 1/4"	7 280	10 414	12 754	14 771	18 025	20 636	23 051

Features:

Made from stainless steel 18/8 (AISI – 304/DIN 1.4301) and 18/8/2 (AISI 316/DIN 1.4401),
 With a black polythene cover, polythene buoys available in stainless steel AISI – 304/AISI – 316
 on demand.

Swing type valve with silicone shutter, available in Viton, EPDM, Buna, PTFE, etc., on demand.
 The valve closes progressively.

Valve system patented and guarantees a perfect seal with minimum force from the float.

Connection with Gas thread cylindrical DIN – ISO 228/1985.

Nominal pressure PN – 10, maximum variable pressure 10 bar.

Non-binding information sheet and may be modified without notice.



Rda. Shimizu nº nave 4
 Pol. Ind. Can Torrella
 08233 Vacarisses – Barcelona - (España)
 Tel. +34 938 280 444 – Fax. +34 938 280 450
 E-mail: comercial@valvulasct.com
info@valvulasct.com

www.valvulasct.com

Medalla de bronce
BRUSSELS EUREKA
 SALON MONDIAL DE L'INVENTION 1986



Certificate Number: 342073