


## Fig. 200 B FLOAT VALVE WITH FLANGE

**H1** – Corresponds to the closed valve. The real value depends on the pressure when closed and the liquid density used.

**H9** – Corresponds to the open valve when the flota is in its lowest position.

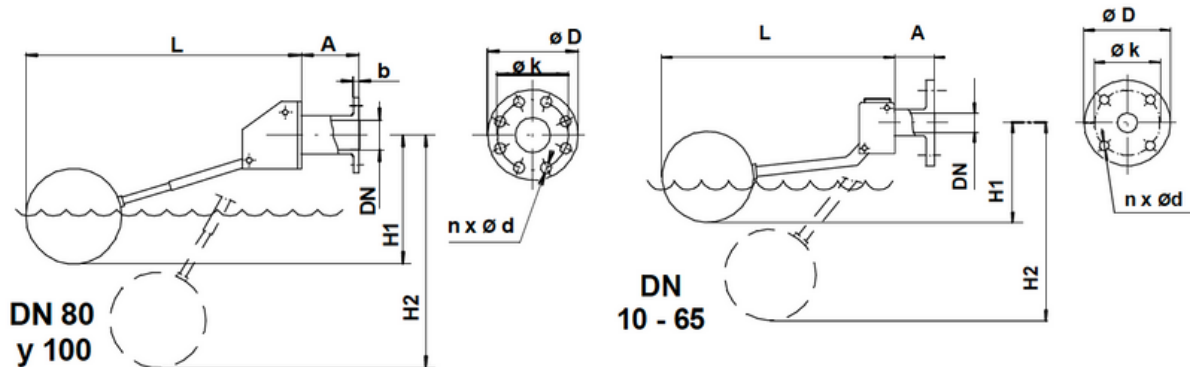

Opening [ mm ]	DIMENSIONS FIG. 200 B [ mm ]										MASS WITHOUT BUOY [ kg ]	Ø SPHERICAL BUOY For pressure p = 10 bar Ø [ mm ]
	DN	A	L	H1	H2	D	k	d	n	b		
10	10	35	300	83 104	235	90	60	14	4	14	0,820	90
15	15	38	410	127 180	375	95	65	14	4	14	0,988	110
20	20	45	490	155 197	436	105	75	14	4	16	1,422	160
25	25	48	585	174 220	521	115	85	14	4	16	1,678	160
32	32	55	585	164 222	520	140	100	18	4	16	2,368	160
40	40	63	710	253 318	651	150	110	18	4	16	4,679	200
50	50	73	798	255 324	736	165	125	18	4	18	5,453	200
65	65	85	805	277 390	737	185	145	18	4	18	6,750	200
80 *	80	170	1 447	310 493	1248	200	160	18	8	20	19,80	300
100 *	100	170	1 550	265 320	1337	220	180	18	8	20	20,62	400 **

\* DN 80 y 100 Standard production, of DN 10 a DN 65 Production against purchase order.

\*\* It is possible to use the spherical buoy of Ø 300 mm up to a pressure of 4 bar.

### Features:

Made from stainless steel 18/8/2 (AISI 316, DIN 1.4401 y CF8M, DIN 1.4408). Swing type valve with silicone shutter, available in VITON, EPDM, PTEF, etc., on demand.

Valve system patented and guarantees a perfect seal with minimum force from the float.

Connection with flange PN – 16/10, DIN 2576 (2527)

Nominal pressure PN – 16, maximum variable pressure 10 bar.



Rda. Shimizu nº nave 4  
Pol. Ind. Can Torrella  
08233 Vacarisses – Barcelona - (España)  
Tel. +34 938 280 444 – Fax. +34 938 280 450  
E-mail: [comercial@valvulasct.com](mailto:comercial@valvulasct.com)  
[info@valvulasct.com](mailto:info@valvulasct.com)

[www.valvulasct.com](http://www.valvulasct.com)

Medalla de bronce  
BRUSSELS EUREKA  
SALON MONDIAL DE L'INVENTION 1986



Certificate Number: 342973