

Flow Indicator SK-...GR



- High temperature resistance
- Double-sided large-surface window
- Natural glass
- Display of flow rate

Characteristics

Mechanical flow indicator for fluid media. A stainless steel flap in the area of flow is lifted by the volume flow, and indicates the present flow rate.

Technical data

Nominal width	DN 15..50	
Process connection	female thread G 1/2..G 2	
Display range	3..195 l/min	for details see table "Ranges"
Q _{max.}	to 250 l/min	
Pressure resistance	PN 16 bar	
Media temperature	0..+100 °C water -20..+170 °C oil	
Ambient temperature	-20..+100 °C	
Materials medium-contact	cast tin bronze, grey iron, crown hardened glass, Flexicarb with nickel reinforcement, 1.4436	
Materials, non-medium-contact	aluminium	
Medium	water (oils available on request)	
Weight	see table "Dimensions and weights"	
Installation location	Standard: Horizontal inwards flow from the left; optionally flow from bottom, installation position affects the range.	


Ranges

Details in the table correspond to horizontal inwards flow with decreasing flow rate.

G	Display range l/min H ₂ O	Q _{max.} recommended	Types
G 1/2	3 - 25	30	SK-015GR025
G 3/4		40	SK-020GR025
G 1	5 - 40	60	SK-025GR040
G 1 1/2	10 - 76	120	SK-040GR076
G 2	15 - 195	250	SK-050GR195

Dimensions and weights

G	Types	L	A	B	D	SW	X	Weight kg
G 1/2	SK-015GR.	90	60	74	40	36	14	1.0
G 3/4	SK-020GR.							
G 1	SK-025GR.	110	76	95	49	43	18	1.8
G 1 1/2	SK-040GR.	130	90	116	60	61	20	3.4
G 2	SK-050GR.	170	114	138	80	74	25	5.9

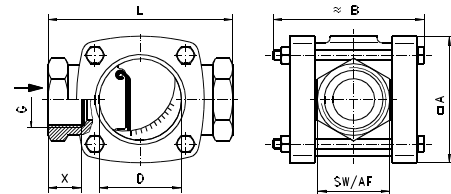

Scaling

Scale divisions 1 to 10.

Display range l/min H ₂ O	Scale divisions									
	1	2	3	4	5	6	7	8	9	10
3 - 25	3	4	5	7	8	9	10	14	20	25
5 - 40	5	7	9	10	13	15	18	21	28	40
10 - 76	10	14	19	22	27	30	36	44	63	76
15 - 195	15	23	29	35	41	46	59	79	118	195

Ordering code

SK - 1. 2. 3. 4.
SK - G R

1. Nominal width	
015	DN 15 - G 1/2
020	DN 20 - G 3/4
025	DN 25 - G 1
040	DN 40 - G 1 1/2
050	DN 50 - G 2
2. Process connection	
G	female thread
3. Connection material	
R	cast tin bronze
4. Display range	
025	3 - 25 l/min
040	5 - 40 l/min
076	10 - 76 l/min
195	15 - 195 l/min