

Airpura

AIR PURIFIERS

C600 DLX

SPECIFIC CHEMICALS - VOCS

REMOVE SPECIFIC AIRBORNE
CHEMICALS INCLUDING
VOLATILE ORGANIC COMPOUNDS

THE AIRPURA C600
Available in White / Black / Cream

THE AIRPURA LIMITED WARRANTY
5 years parts / 10 years labor



THE AIRPURA C600 DLX ENHANCED CHEMICAL ABATEMENT UNIT OFFERS YOU:

- **26 LB ENHANCED IMPREGNATED ACTIVATED CARBON BED** Adsorbs airborne chemicals including volatile organic compounds (VOCS)
- **HEPA-BARRIER POST FILTER** Traps particles after the carbon bed.
- **560 CFM INTEGRATED FAN / MOTOR** Largest CFM available in a portable unit.
- **VARIABLE SPEED MOTOR** Gives you flexible air flow options.
- **PROPER CONTACT TIMES FOR EFFECTIVE FILTRATION** Correctly calibrated air flow / bed depth for efficient adsorption.
- **PRESSURE SEALED FILTER CHAMBER** Unique pressure seal on the filter chamber ensures all contaminants are filtered and non escape.

OVER 4000 CHEMICALS CAN BE REMOVED

Carbon blends are available to deal with over 4000 airborne chemicals including:

Ammonias	Hydrogen Bromide	Toulene
Nitrous dioxide	Sulfur dioxide	Napthene
Nitrous trioxide	Hydrogen fluoride	Pesticides
Monoethylamine	Hydrogen chloride	Chlorine
Hydrogen Sulfide	Benzene	Mold Mycotoxins
Mercury vapors	Methylene Chloride	
Chlorine dioxide	Radioactive Iodine	

FILTER LIFE



PREFILTER should be replaced every 12 months.




CARBON FILTER should be replaced every 2 years



HEPA BARRIER FILTERS should be changed every 12 months

EXPERIENCE THE EVOLUTION OF CLEAN AND HEALTHY AIR

FILTRATION SYSTEM

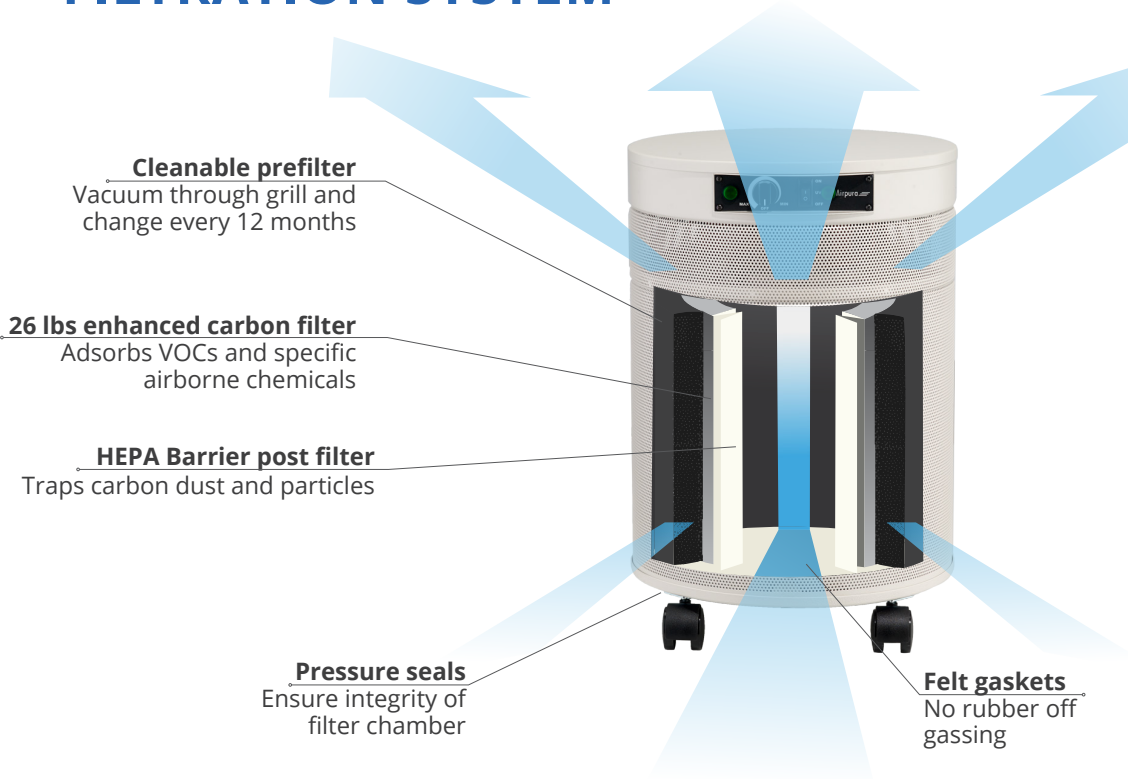

Cleanable prefilter
Vacuum through grill and change every 12 months

26 lbs enhanced carbon filter
Adsorbs VOCs and specific airborne chemicals

HEPA Barrier post filter
Traps carbon dust and particles

Pressure seals
Ensure integrity of filter chamber

Felt gaskets
No rubber off gassing

UNIQUE FEATURES

ALL METAL HOUSING ensures no plastic vapors are emitted.

MOTOR OUT OF THE AIR FLOW. Most air purifiers blow the clean air over the motor and pick up impurities, while our purifiers do not.

ELECTRICAL PARTS IN A SEALED CHAMBER OUT OF THE AIRFLOW. Increases safety and prevents off-gassing

PRESSURE SEALED FILTER CHAMBER prevents leakage of polluted air around filters.

FELT GASKETS SEAL THE FILTER CHAMBER. Maximize filtration with no rubber off-gassing found with other filters.

CLEAN MODERN APPEARANCE fits in with any decor.

LOW NOISE LEVEL (at 6 feet) 25 db on low 61 db on high (560 cfm).

SPECIALLY DESIGNED TO REMOVE SPECIFIC AIRBORNE CHEMICALS AND VOCS

DWELL TIME

For best results the correct dwell time of the pollutants over the enhanced carbon bed is vital. The 560 CFM impeller/motor combined with the fixed speed control and unimpeded airflow of the Airpura 600 series allows you to set the airflow precisely and achieve the results you need.

EXPERTISE YOU CAN CALL ON

Airpura indoor air quality experts can offer you a solution to most airborne chemical problems. Contact your Airpura dealer or call us directly to discuss your needs.

TECHNICAL SPECIFICATIONS

ODOR, AIRBORNE CHEMICAL AND VOC CONTROL

26 lbs super enhanced impregnated activated carbon 13" x 13" x 7.5"

CARBON BED

3" deep x 570 sq" surface

AIR FLOW 560 CFM

More cfm than any other portable unit available

PRE-FILTER

570 sq in x 1 in

POST PARTICLE FILTER

306 sq in

SIZE

23" x 15"

WEIGHT

45 lbs total

VOLTAGE OPTIONS

115 or 220 volts

WATTS

120 on high / 40 on low

SOUND LEVEL

28.1 db on low (at 6 feet)
62.3 db on high (560 cfm)
(Room level 25.1 db)

ETL CERTIFIED

Conforms ANSI / UL 507

YOUR
AIRPURA™ DEALER

