

Hydraulic Parts Leveler FlatMaster® 140

for sheet metal parts from 4 mm up to 43 mm thickness



before

after

Machine type	FlatMaster® 140130	FlatMaster® 140160	FlatMaster® 140200
Parts thickness (mm)	4.0–43.0	4.0–43.0	4.0–43.0
Max. passage width (mm)	1,300	1,600	2,000
Min. parts length (mm)	290	290	290
Quick-change system for leveling rollers	standard	standard	standard
Setting	hydraulic	hydraulic	hydraulic
Leveling gap control	standard	standard	standard
Overload protection	standard	standard	standard
Visualisation	Multi-touch screen	Multi-touch screen	Multi-touch screen
CE-Certification	standard	standard	standard
Dimensions (mm) (length x width x height)	2,700 x 5,100 x 2,700	2,700 x 5,400 x 2,700	2,700 x 5,800 x 2,700
Total weight (kg)	50,000	55,000	62,000

ARKU Maschinenbau GmbH
 Siemensstr. 11, 76532 Baden-Baden, Germany
 Phone: +49 72 21 / 50 09-0
 Fax: +49 72 21 / 50 09-11
 info@arku.com, www.arku.com

ARKU
 EXPERTS IN LEVELING



▲ Unique – The ARKU quick-change system for leveling rollers offers the advantage of cleaning and changing the leveling rollers in a few minutes.


FlatMaster® – constant leveling results for laser parts,

plasmacutting,

or flamecutting parts.



Leveling performance diagram of the FlatMaster® 140

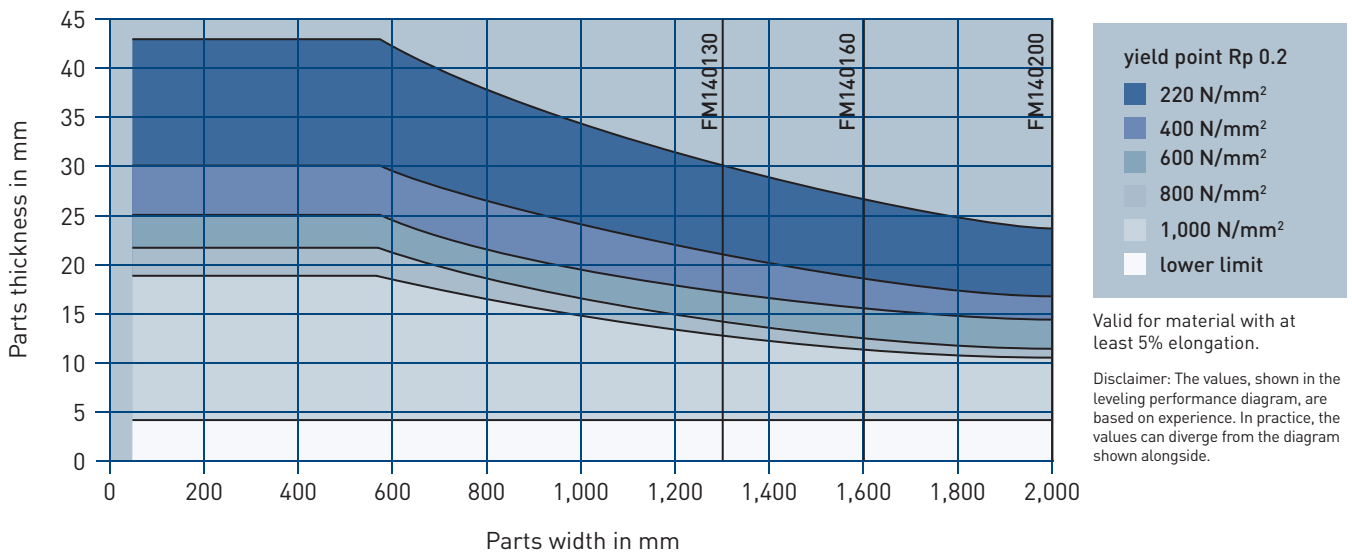

ARKU

EXPERTS IN LEVELING