


Parts Leveler EcoMaster® 25

for sheet metal parts from 0.25 mm up to 3 mm

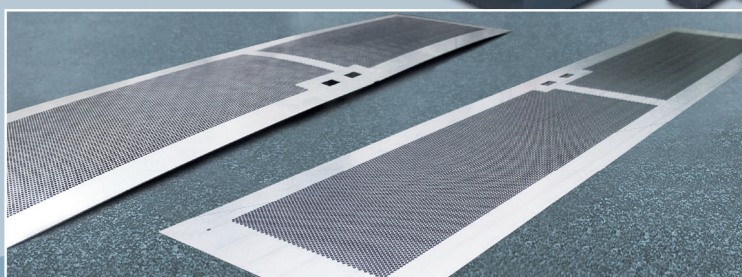

before

after

Machine type	EcoMaster® 2530	EcoMaster® 2554	EcoMaster® 2580
Parts thickness (mm)	0.25–3.0	0.25–3.0	0.25–3.0
Max. passage width (mm)	300	540	800
Min. parts length (mm)	45	45	45
Leveling speed (m/min)	3–20	3–20	3–20
Quick-change system for leveling rollers	quick change (standard) drawer (option)	quick change (standard) drawer (option)	quick change (standard) drawer (option)
Automatic adjustment	optional	optional	optional
CE-Certification	standard	standard	standard
Dimensions (mm) (length x width x height)	1,680 x 1,540 x 1,750	1,680 x 1,780 x 1,750	1,680 x 2,040 x 1,750
Total weight (kg)	about 2.500	about 3.000	about 3000

ARKU Maschinenbau GmbH
Siemensstr. 11, 76532 Baden-Baden, Germany
Phone: +49 72 21 / 50 09-0
Fax: +49 72 21 / 50 09-11
info@arku.com, www.arku.com

ARKU

LEVELING+DEBURRING






Unique – The ARKU quickchange system for leveling rollers offers the advantage of cleaning and changing the leveling rollers in a few minutes.


EcoMaster® – constant leveling results for automotive,

laser job shops,

or aerospace.

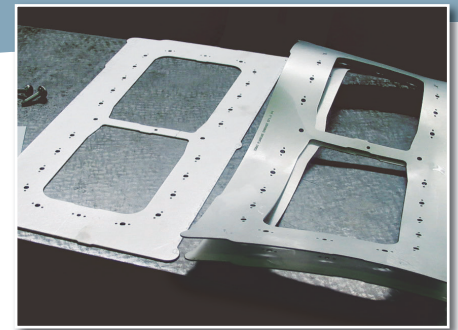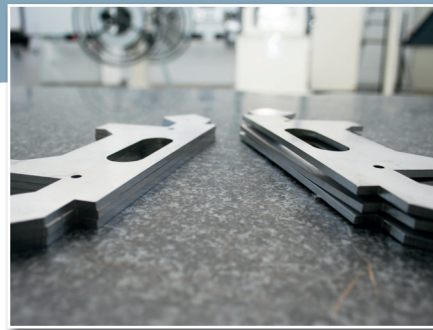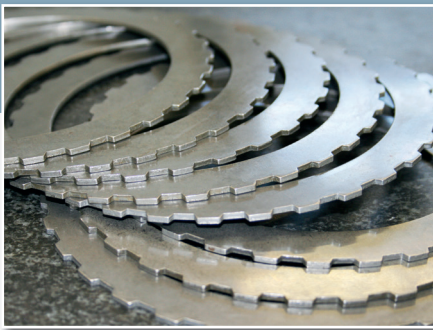

Leveling performance diagram of the EcoMaster® 25

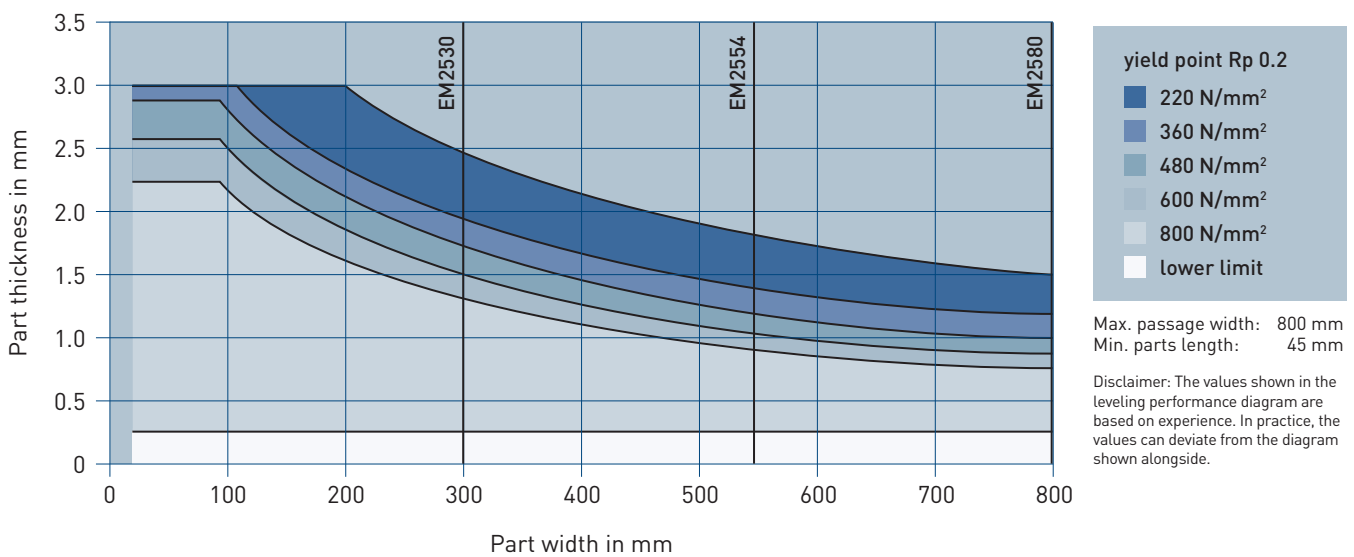

ARKU

LEVELING + DEBURRING