


Parts Leveler EcoMaster® 12

for sheet metal parts from 0.1 mm up to 1.2 mm

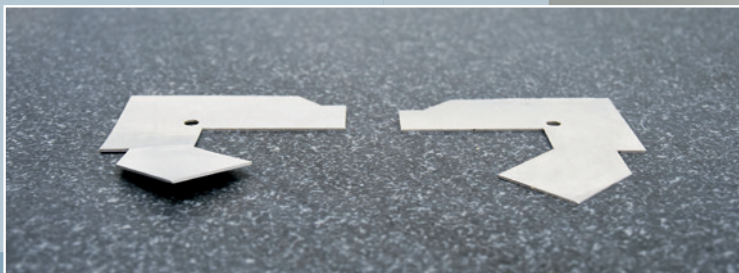

▲
before

▲
after

Machine type	EcoMaster® 1215
Parts thickness (mm)	0.1 – 1.2
Max. passage width (mm)	150
Min. parts length (mm)	20 (60 with conveyor)
Leveling speed (m/min)	3 – 20
Quick-change system for leveling rollers	Cassette
CE-Certification	standard
Dimensions (mm) (length x width x height)	580 x 940 x 1300
Total weight (kg)	400

AR KU Maschinenbau GmbH
Siemensstr. 11, 76532 Baden-Baden, Germany
Phone: +49 72 21 / 50 09-0
Fax: +49 72 21 / 50 09-11
info@arku.com, www.arku.com

AR KU

LEVELING + DEBURRING

ARKU

ARKU


12

Unique – The ARKU quick-change system for leveling rollers offers the advantage of cleaning and changing the leveling rollers in a few minutes.

EcoMaster® – For the electrical, watch, and textile industries.



Leveling performance diagram of the EcoMaster® 12

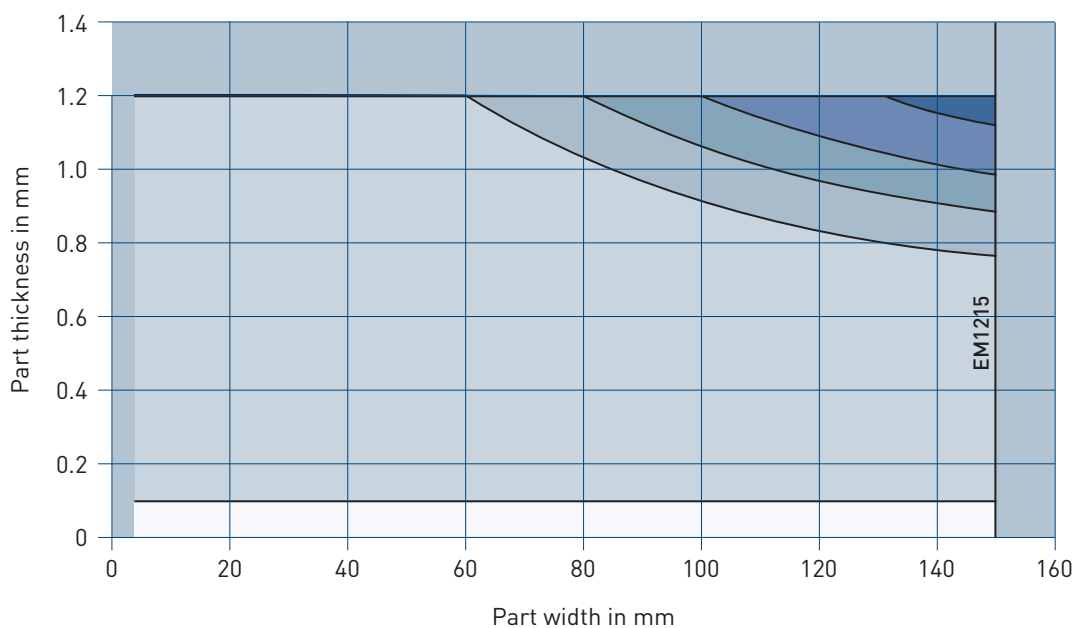

yield point Rp 0.2

- 220 N/mm²
- 360 N/mm²
- 480 N/mm²
- 600 N/mm²
- 800 N/mm²
- lower limit

Max. passage width: 150 mm
Min. parts length: 20 mm

Disclaimer: The values shown in the leveling performance diagram are based on experience. In practice, the values can deviate from the diagram shown alongside.

ARKU

LEVELING + DEBURRING