



STAY SERIES

Studio Jr. Kennel

48in. L x 48in. W x 52in. H


Tools Needed:

No Tools Required

Recommend 2 people for full installation Approx. Assembly time with 2 people: 30 minutes or less

(kennel size is approximate)










PANEL CLAMPS x16





FIXATIONS







PREMIUM COVER x1

Designed in Oregon by:

Jewett Cameron Co. CUSTOMER CARE & SERVICE: 1-800-955-2879 www.jewettcameron.com

©2017-2021 Jewett Cameron Co. 32275 NW Hillcrest, PO Box 1010 North Plains, OR 97133

MADE IN CHINA Pg. 1 PRPRM Rev. 2021-04-06 PRPRM Rev. 2021-04-06


KENNEL ASSEMBLY

1) ATTACH GATE LATCH

to gate door at desired position (illust. 1a). Insert Frame Caps into holes at the top of each panel and the gate door (illust. 1b).

illust. 1a






2) ASSEMBLE / CONNECT PANELS

Stand up 2 panels, forming a 90° angle.

Apply **Clamps**, 6" from the top and 6" from the bottom. Do not overtighten. Repeat for the rest of the panels and gate until kennel is complete. Side panels are aligned on the **INSIDE** edge of the front and back panels. (illust. 2b) **NOTE**: Ensure that the wing nut is on the **outside** of

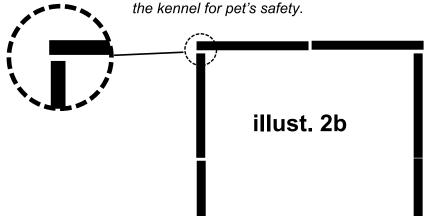




Warning: Roof is non-load bearing


Remove Canopy cover from frame before wind or snow

3) ROOF

(A) Insert Roof Frame Peaks into front and back panels of kennel.(B) Attach Roof Frame Ridge Pole to the center of each peak using the "T" shaped clamps, Do not overtighten.

NOTE: Wing nuts should be towards the **INSIDE** of the kennel, to prevent damage to the cover.



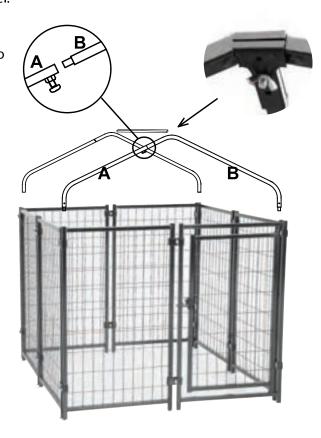


4) ATTACH COVER

Drape Canopy cover over kennel roof frame with the Lucky Dog® woven label on the exterior and attachment tabs on interior.

Secure cover to kennel at all 4 corners first.

Attach the tabs to the frame by pulling the long end of the tab around the outside of the top frame rail, looping it around while pulling snugly, and attaching it to small tab.

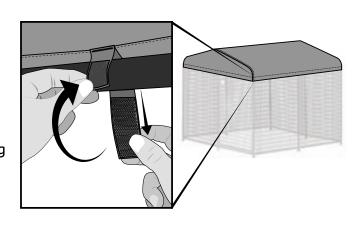

Pg. 2 PRPRM Rev. 2021-04-06 Pg. 3