


# EARTHQUAKE VALVES - FLANGED



California Seismic Valves are UL listed in the USA and Canada, Certified by the California State Architect's Office, Approved by the City of Los Angeles, and are warranted free of manufacturer's defects for 30 years. All valves meet California Standards for Earthquake Actuated Automatic Gas Shut off Systems, Standard No. 12-23-1, ANSI Z21.70, 1981 and ASCE 25-97 Standards.

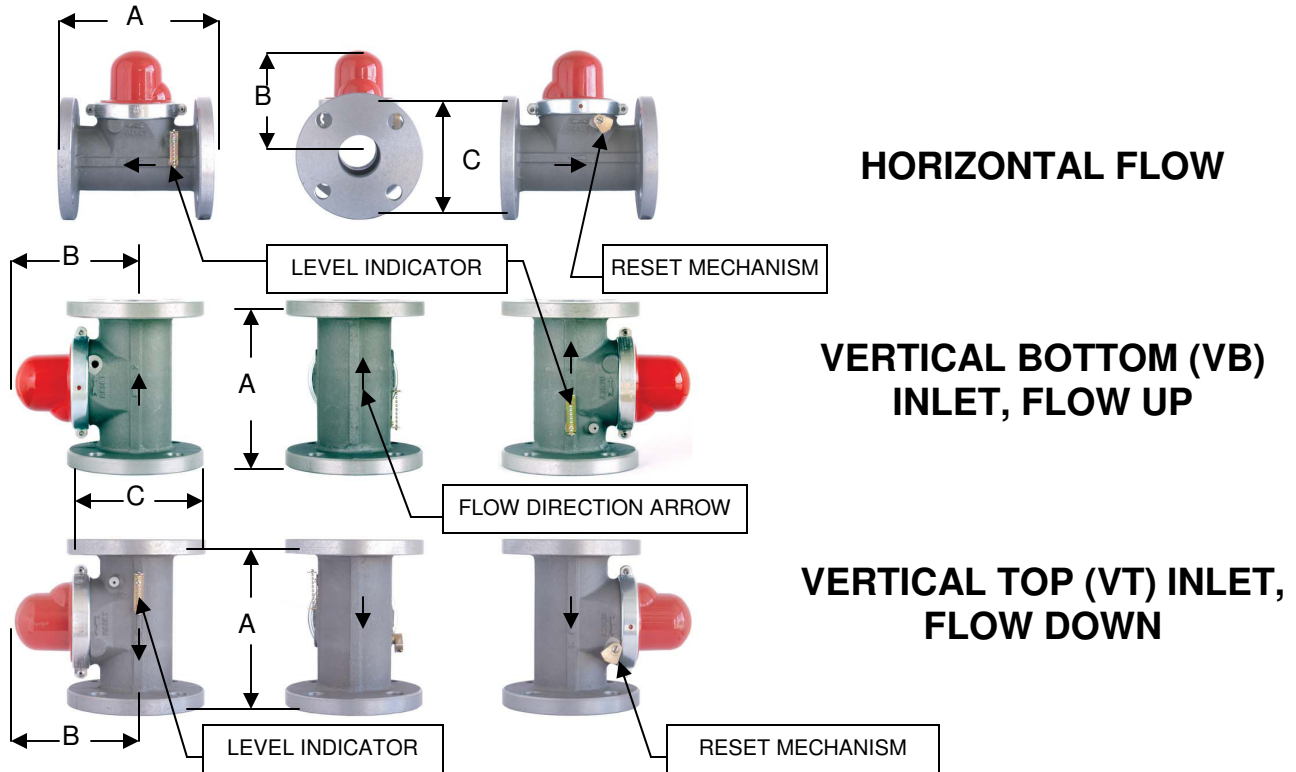

**HORIZONTAL FLOW**

**VERTICAL BOTTOM (VB) INLET, FLOW UP**

**VERTICAL TOP (VT) INLET, FLOW DOWN**

FLANGED VALVE DIMENSIONS									
PIPE SIZE	MODEL # FOR FLOW DIRECTION			MAX PSIG	LENGTH A	HEIGHT B	WIDTH C	BOLT DIAM	# BOLT HOLES
	HORZ	UP	DOWN						
2"	314F-60	VB-314F-60	VT-314F-60	60	7-1/8"	5-3/8"	6"	4-3/4"	4
2-1/2"	318F-60	VB-318F-60	VT-318F-60	60	7-1/2"	5-3/8"	7"	5-1/2"	4
3"	315F-60	VB--315F-60	VT--315F-60	60	7-1/2"	5-3/8"	7-1/2"	6"	4
4"	316F-60	VB-316F-60	VT-316F-60	60	7-1/2"	6-3/8"	9"	7-1/2"	8
6"	317F-60	VB-317F-60	VT-317F-60	60	12-1/2"	7-1/2"	11"	9-1/2"	8
8"	319F-60	VB-319F-60	VT-319F-60	60	16-3/8"	9-5/8"	13-1/2"	11-3/4"	8

VALVE FEATURES – MANUAL RESET, VISUAL OPEN-CLOSE INDICATOR, NO POWER REQUIRED, SWING CHECK VALVE ARRANGEMENT, FULL PORT VALVE WITH MINIMAL PRESSURE DROP (CAPACITY TABLES AVAILABLE UPON REQUEST)



**Meter, Valve & Control**