


EARTHQUAKE VALVES - NPT



California Seismic Valves are UL listed in the USA and Canada, Certified by the California State Architect's Office, Approved by the City of Los Angeles, and are warranted free of manufacturer's defects for 30 years. All valves meet California Standards for Earthquake Actuated Automatic Gas Shut off Systems, Standard No. 12-23-1, ANSI Z21.70, 1981 and ASCE 25-97 Standards.

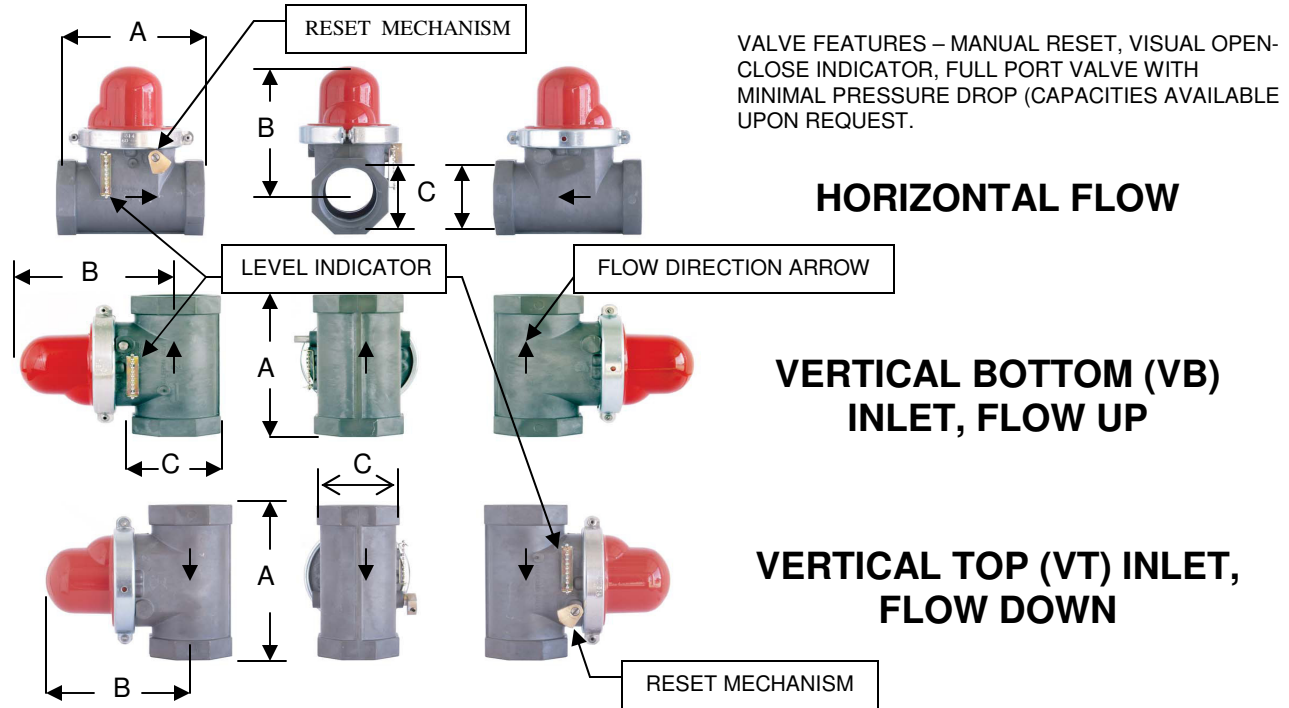

VALVE FEATURES – MANUAL RESET, VISUAL OPEN-CLOSE INDICATOR, FULL PORT VALVE WITH MINIMAL PRESSURE DROP (CAPACITIES AVAILABLE UPON REQUEST).

NPT VALVE DIMENSIONS							
PIPE SIZE	MODEL # FOR FLOW DIRECTION			MAX PSIG	LENGTH A	HEIGHT B	WIDTH C
	HORZ	UP	DOWN				
3/4"	300-7	VB-300-7	VT-300-7	7	4"	4-3/4"	3-7/8"
3/4"	310-60	VB-310-60	VT-310-60	60	4"	4-3/4"	3-7/8"
1"	301-7	VB-301-7	VT-301-7	7	4"	4-3/4"	3-7/8"
1"	311-60	VB-311-60	VT-311-60	60	4"	4-3/4"	3-7/8"
1-1/4"	302-7	VB-302-7	VT-302-7	7	5-1/4"	5"	3-7/8"
1-1/4"	312-60	VB-312-60	VT-312-60	60	5-1/4"	5"	3-7/8"
1-1/2"	303-7	VB-303-7	VT-303-7	7	5-1/4"	5"	3-7/8"
1-1/2"	313-60	VB-313-60	VT-313-60	60	5-1/4"	5"	3-7/8"
2"	314-60	VB-314-60	VT-314-60	60	5-5/8"	5-1/4"	3-7/8"

