

Installation instructions

Ride-on Children's Excavator

Model: YD1006

Batch: PR4635

Please read and retain these instructions for future reference.



WARNING:

CHOKING HAZARD — Small parts not for children under 3 years or any individuals who have a tendency to place inedible objects in their mouths.

Be careful of **SHARP EDGES**

CAUTION

This product contains small parts in its unassembled state. Adult assembly is required.



The illustrations used in this manual are to illustrate the operation method and structure of the product. Where there is a small difference between the physical item and the illustrations, please take the physical as the standard.

*Specifications Introduction:

Item Name	Specifications
Suitable Age:	3 years +
Load Capacity:	Under 25KG
Size of Car:	82 X 27 X 40CM
Battery for Music:	3 x AA battery (not included)
Features:	squeaky horn on the steering wheel and operation levers to scoop and lift up light items. Music



SAFETY INFO:

1. When unpacking the ride on, properly dispose of all plastic wrappings.
2. Adult supervision is required at all times.
3. Failure to follow the instructions may affect the safety of children.
4. This product is designed for use by children from 3 years to 6 years of age.
5. Protective equipment such as a helmet is recommended (protective equipment is not included).
6. Assembly must be completed by an adult.
7. Before use, ensure that all removeable parts and fasteners are firmly in place.
8. Only one child can use this at a time.
9. A child who is riding is not to be pushed.
10. Do not allow a child to stand on the ride-on.
11. Do not let children ride in the street, anywhere dangerous including stairs, doorsteps, steep slopes, streets/roads, vehicle traffic, next to bodies of water and away from other obstacles. Use during day light hours or in an illuminated area is advised to avoid accidents in the dark.
12. Do not drive on long or wet grass, mud, soft ground, gravel or sand.
13. It is not recommended for use on wooden floors. The wheels may damage some floors.
14. The maximum carrying capacity is 25kg.

Part list Part Diagram






1.	Body of excavator
2.	The back of seat
3.	The front wheel
4.	The front wheel cover
5.	Front axle and steering lever
6.	The steering wheel
7	The digging arm

Assembly



1. Pull the black plastic tube out of the front, as shown in Pictures 1.



2. Place the digger arm in the middle of the front of the car and insert the black plastic tube into the hole, as shown in Pictures 2 and 3.

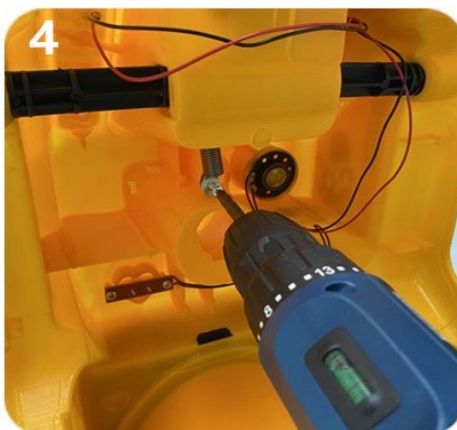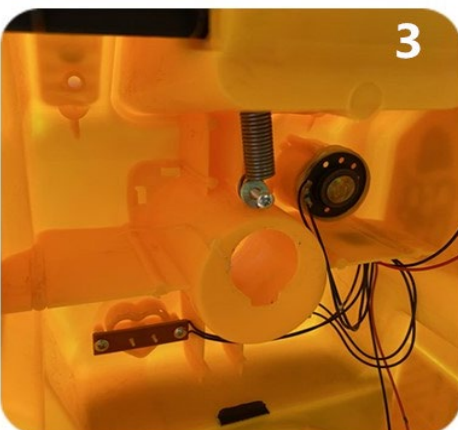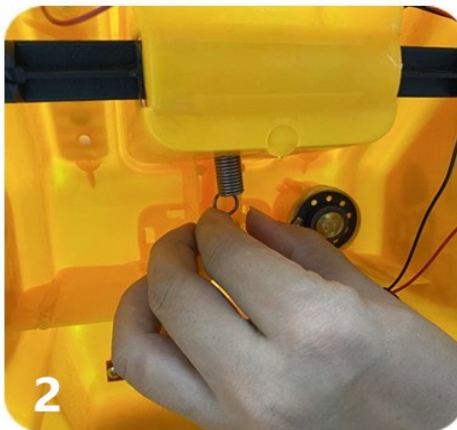

3. Put the coil spring of the digging arm into the hole of the front of the car, as shown in Pictures 1

4. Pull the coil spring out from the bottom. The coil spring covers the yellow tubule. Place spacers and screws to hold it in place, as shown in Pictures 2 and 3.

5. Tighten the screws with a screwdriver. Complete the installation of the digging arm, as shown in Picture 4

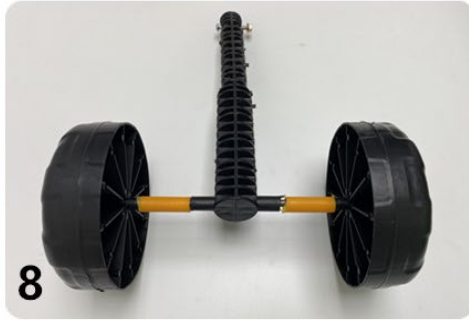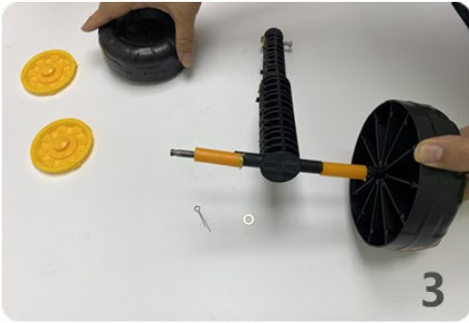


6. Take the front axle, the gasket, the steering lever, and the yellow plastic bushing, as shown as Picture 1.




7. The front axle goes first through the gasket, then through the wheels and yellow bushing, then through the steering lever, and in turn the front wheels are installed, as shown in Picture 2 and 3.

8. After the tire is all installed, finally put the gasket, insert the wire into the hole of the front axle, bend both sides of the wire and fix it, as shown in Picture 4, 5 and 6.

9. Finally, attach the two tire covers to the clamping slots. The installation of the front wheels is complete, as shown in Pictures 7 and 8

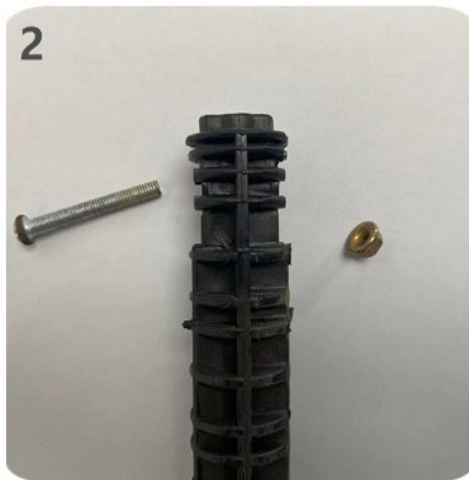

10. Remove the screw from the steering lever and set aside. Prepare to install the steering lever and steering wheel, as shown in Picture 1 and 2.

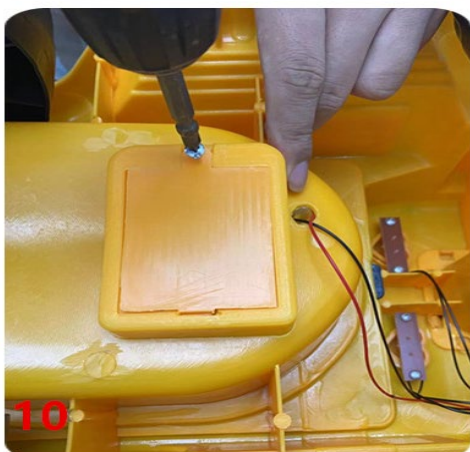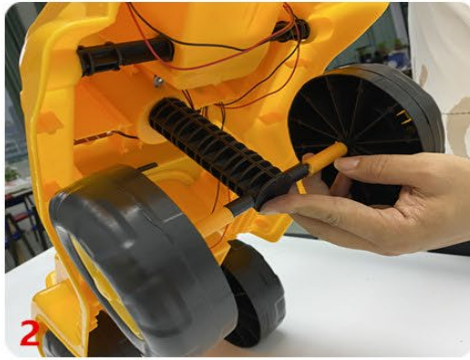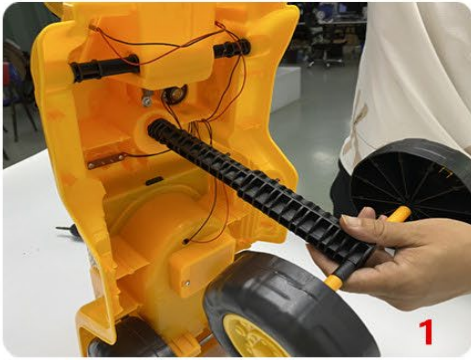

11. Align the steering lever with the hole and insert it from the bottom of the excavator, as shown in Pictures 1 and 2

12. Install the steering wheel in the steering lever from top to bottom, keeping in mind that the steering wheel holes are aligned with the steering lever holes. As shown in Picture 3 and 4.

13. Insert the screw into the hole where the steering wheel and steering lever are aligned, and then tighten the screw. Complete steering wheel installation. As shown in Pictures 5 and 6.

14. Insert the back of seat into the slot. Complete the installation, as shown in Picture 7 and 8

15. Open the battery tank at the bottom of the excavator, put in 3 AA dry batteries and then screw the battery tank cover, as shown in Pictures 9 and 10. Make sure to replace the screws. **Always keep small parts and batteries away from Children to avoid choking**



Rules for Safe Riding:

- Keep Children within Safe Riding Areas: Never use in roadway, near motor vehicles, on lawn space, on or near steep inclines or steps, swimming pools or other bodies of water;
- Use the toy only on flat surfaces. such as inside your house, garden or playground.
- Never use in the dark. A child could encounter unexpected obstacles and have an accident. Operate the vehicle only in the daytime or a well-lit area.
- It is not recommended to drive the vehicle on wet surfaces or on lopes of greater than 15 degrees.
- Do not use this vehicle outdoors when it is raining or snowing.
- Please follow the correct weight and age limits allowed to drive this vehicle.
- In order to avoid accidents, please ensure the vehicle is safe before riding.

LENOXX ELECTRONICS AUST PTY LTD

www.lenoxx.com.au

Tel: 1300 666 848



LenoxxElectronics



@LenoxxAustralia



Lenoxxelectronics