
asalite_®



CATALOG **2022**





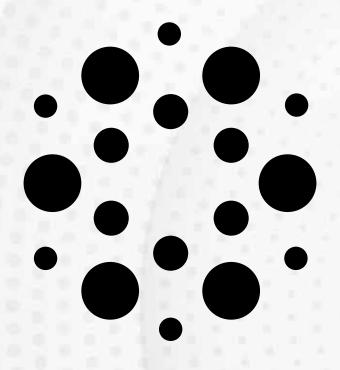

ASALITE TOGETHER FOR A BRIGHTER FUTURE

With Asalite products, you can light your home and business in an energy- and cost-effective way. The Asalite brand was founded in 2014 and we can proudly say that in seven years 1,500 companies have already tried one of our products. We have a national network of representatives and provide services to our partners through our experienced team. Our wholesale web store has been accepting orders since 2017 with a constantly growing number of partners. 99% of our offer is available in our warehouse, so the ordered products will be delivered to our partners the 2-5 days. The quality of our products is also recognized by our foreign partners, and thanks to this, our export activities to the countries of the European Union are also showing continuous development. As a result of innovative developments, we are able to supply our partners with the most modern products and in many cases we are pioneers in the domestic market with some of our solutions. All Asalite products comply with the laws and regulations in force in the European Union.

"Our professional team and quality products guarantee that it is worth choosing us in a long term!"



Monoki Péter *CEO, owner*

Table of contents

5 6 13
13
15
18
25
27
31
38
40
43
46
51
53
55
57



ASALITE LED - not only the light source of the future, but also of the present! The ASALITE brand also offers an alternative to a combination of high quality and long-term reliability for LED bulbs. Thanks to the LED chips used for the products, they are a stable solution for even aesthetic and eye-pleasing interior lighting.






ASALITE LED Lightsource A60 globe E27 7W 3000K/4000K/6500K (570 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.



















asaurre.

asaurre.

asaurre.

TECHNICAL DETAILS

Consumption	7W (≈45W)
Socket	E27
Luminousity	570 lumens
Colour temperature	3000K/4000K/6500K
Lighting angle	320°
Size	60 x 110mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0031, ASAL0047 ASAL0132

Asalite LED Lightsource A60 globe E27 9W 3000K/4000K/6500K (810 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.



















TECHNICAL DETAILS

Consumption	9W (≈60W)
Socket	E27
Luminousity	810 lumens
Colour temperature	3000K/4000K/6500K
Lighting angle	320°
Size	60 x 112mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0011, ASAL0046 ASAL0108

Asalite LED Lightsource A60 globe E27 12W 3000K/4000K/6500K (1055 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.





















TECHNICAL DETAILS

Consumption	12W (≈75W)
Socket	E27
Luminousity	1055 lumens
Colour temperature	3000K/4000K/6500K
Lighting angle	320°
Size	60 x 120mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0032, ASAL0045 ASAL0106

Asalite LED Lightsource A65 globe E27 15W 3000K/4000K/6500K (1430 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.





















Consumption	15W (≈95W)
Socket	E27
Luminousity	1430 lumens
Colour temperature	3000K/4000K/6500K
Lighting angle	320°
Size	60 x 125mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0052, ASAL0053 ASAL0107

LED Lightsources



Asalite LED Lightsource A70 globe E27 18W 3000K/4000K/6500K (1620 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.



















asaurre

asaurre.

TECHNICAL DETAILS

Consumption	18W (≈118W)
Socket	E27
Luminousity	1620 lumens
Colour temperature	3000K/4000K/6500K
Lighting angle	320°
Size	70 x 140mm
Dimmable	no
Lifetime	30 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	AsAL0147, AsAL0146 AsAL0148

Asalite LED Lightsource R63 spot E27 10W 3000K/4000K (720 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.




















TECHNICAL DETAILS Consumption



Asalite LED Lightsource G45 mini globe E27 4W 3000K/4000K (350 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.

















TECHNICAL DETAILS

Consumption	4W (≈30W)
Socket	E27
Luminousity	350 lumens
Colour temperature	3000K/4000K
Lighting angle	180°
Size	45 x 75mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL00164, ASAL0057

Asalite LED Lightsource G45 mini globe E27 6W 3000K/4000K (510 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.





















asaurre


Consumption	6W (≈40W)
Socket	E27
Luminousity	510 lumens
Colour temperature	3000K/4000K
Lighting angle	180°
Size	45 x 75mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0058, ASAL0059





Asalite LED Lightsource T45 stick E27 13W 3000K/4000K (1300 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping















asaure

TECHNICAL DETAILS

Consumption	13W (≈88W)
Socket	E27
Luminousity	1300 lumens
Colour temperature	3000K/4000K
Lighting angle	320°
Size	43,5 x 138,5mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0173, ASAL0174

Asalite LED Lightsource E14 3W 3000K (340 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.

















TECHNICAL DETAILS

Consumption	3W (≈30W)
Socket	E14
Luminousity	340 lumens
Colour temperature	3000K
Lighting angle	320°
Size	22 x 60mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	E
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0121

Asalite LED Lightsource C37 candle E14 4W 3000K/4000K (350 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.

















TECHNICAL DETAILS

Consumption	4W (≈30W)
Socket	E14
Luminousity	350 lumens
Colour temperature	3000K/4000K
Lighting angle	180°
Size	37 x 100mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0014, ASAL0063

Asalite LED Lightsource C37 candle E14 6W 3000K/4000K/6500K (510 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.





















asaurre

Consumption	6W (≈40W)
Socket	E14
Luminousity	510 lumens
Colour temperature	3000K/4000K/6500K
Lighting angle	180°
Size	37 x 100mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0030, ASAL0068, ASAL0111

LED Lightsources



Asalite LED Lightsource G45 mini globe E14 5W 3000K/4000K (410 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping


















asaure.

TECHNICAL DETAILS

Consumption	5W (≈35W)
Socket	E17
Luminousity	410 lumens
Colour temperature	3000K/4000K
Lighting angle	180°
Size	45 x 75mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0165, ASAL0060

Asalite LED Lightsource R50 spot E14 5W 3000K/4000K (400 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping















asacite

TECHNICAL DETAILS

Consumption	5W (≈35W)
Socket	E14
Luminousity	400 lumens
Colour temperature	3000K/4000K
Lighting angle	180°
Size	50 x 86mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0064, ASAL0065

Asalite LED Lightsource T37 stick E14 7W 3000K/4000K (600 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.

















TECHNICAL DETAILS

Consumption	7W (≈47W)
Socket	E14
Luminousity	600 lumens
Colour temperature	3000K/4000K
Lighting angle	320°
Size	37 x 115mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0171 , ASAL0172

Asalite LED Lightsource GU10 spot 3W 3000K/4000K (250 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.













Consumption	3W (≈25W)
Socket	GU10
Luminousity	250 lumens
Colour temperature	3000K/4000K
Lighting angle	120°
Size	50 x 60mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0049, ASAL0048

















Asalite LED Lightsource GU10 spot 5W 3000K/4000K/6500K (410 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.





















Asalite LED Lightsource GU10 spot 7W 3000K/4000K/6500K (560 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.






















Asalite LED Lightsource MR16 spot 12V 5W 3000K/4000K (400 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools. office buildings, hospitals and shopping centers.




















Asalite LED Lightsource G4 12V 1,5W 3000K/4000K (110 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.



















TECHNICAL DETAILS

Consumption	5W (≈35W)
Socket	GU10
Luminousity	410 lumens
Colour temperature	3000K/4000K/6500K
Lighting angle	120°
Size	50 x 60mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0028, ASAL0029 ASAL0109

TECHNICAL DETAILS

Consumption	7W (≈45W)
Socket	GU10
Luminousity	560 lumens
Colour temperature	3000K/4000K/6500K
Lighting angle	120°
Size	50 x 60mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0051, ASAL0050 ASAL0110

TECHNICAL DETAILS

Consumption	5W (≈39W)
Socket	MR16
Luminousity	400 lumens
Colour temperature	3000K/4000K
Lighting angle	60°
Size	50 x 47 mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	12V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0232, ASAL0233

Consumption	1,5W (≈13W)
Socket	G4
Luminousity	110 lumens
Colour temperature	3000K/4000K
Lighting angle	320°
Size	12 x 37mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	12 V AC/DC, 50/60 Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0070, ASAL0071

LED Lightsources

::: asalıте.

Asalite LED Lightsource G4 12V 2W 3000K/4000K (220 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping

























TECHNICAL DETAILS

Consumption	2W (≈22W)
Socket	G4
Luminousity	220 lumens
Colour temperature	3000K/4000K
Lighting angle	320°
Size	16 x 42mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	12 V AC/DC, 50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0097, ASAL0098

Asalite LED Lightsource G9 3W 3000K/4000K (360 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.

















TECHNICAL DETAILS

Consumption	3W (≈35W)
Socket	G9
Luminousity	360 lumens
Colour temperature	3000K/4000K
Lighting angle	320°
Size	16 x 50mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	E
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0156, ASAL0157

Asalite LED Lightsource G9 6W 3000K/4000K (600 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.




















Consumption	6W (≈50W)
Socket	G9
Luminousity	600 lumens
Colour temperature	3000K/4000K
Lighting angle	320°
Size	21 x 69mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0158, ASAL0159



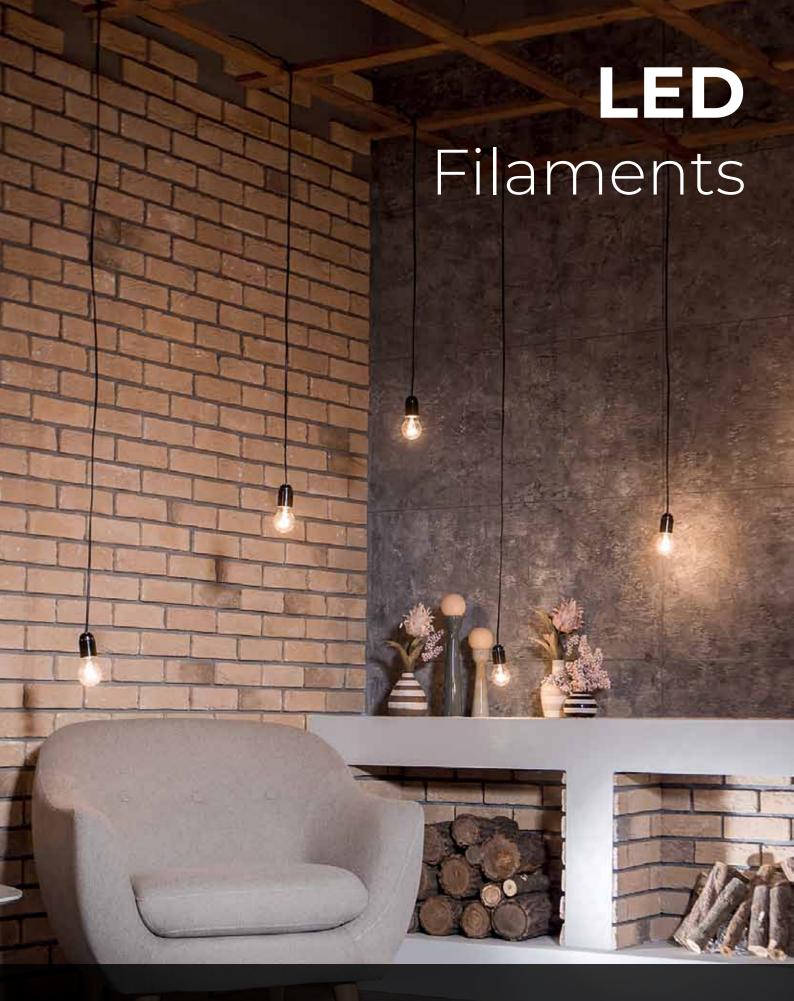

The color of the traditional light bulbs is 2700 Kelvin, the same color temperature is brought back by the ASALITE LED Filament product family, which besides having a favorable consumption, mood and shape fit perfectly with a Vintage style restaurant, loft-style apartment or office.



Asalite LED Lightsource Filament C35 candle E14 4W 2700K/4000K (400 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping

















TECHNICAL DETAILS

Consumption	4W (≈35W)
Socket	E14
Luminousity	400 lumens
Colour temperature	2700K/4000K
Lighting angle	320°
Size	35 x 98mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0117, ASAL0122

Asalite LED Lightsource Filament A60 globe E27 6W 2700K/4000K (660 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.

















TECHNICAL DETAILS

Consumption	6W (≈50W)
Socket	E27
Luminousity	660 lumens
Colour temperature	2700K/4000K
Lighting angle	320°
Size	60 x 108mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	E
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0118, ASAL0123

Asalite LED Lightsource Filament A60 globe E27 8W 2700K/4000K (810 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.



















TECHNICAL DETAILS

Consumption	8W (≈60W)
Socket	E27
Luminousity	810 lumens
Colour temperature	2700K/4000K
Lighting angle	320°
Size	60 x 108mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0119, ASAL0124

Asalite LED Lightsource Filament ST64 E27 8W 2700K (810 lumen)

The ASALITE brand offers in case of the LED bulbs too an alternative of a combination of high quality and long life. In addition to the classic residential use, it is also a perfect solution for hotels, schools, office buildings, hospitals and shopping centers.











Consumption	8W (≈60W)
Socket	E27
Luminousity	810 lumens
Colour temperature	2700K/4000K
Lighting angle	320°
Size	64 x 142mm
Dimmable	no
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0120















The LED tube offers an alternative to the previous traditional type of T8 fluorescent tube. The advantage is that its light is flickering-free and has instant full light after switching on. As an environmentally friendly product, it offers immediate energy savings.

Our products are available with a power of 100 lumens/Watt and 140 lumens/Watt. It can be installed in luminaires and fixtures intended for indoor use for main lighting tasks. As it is also suitable for everyday use, we recommend the product for lightening office buildings, warehouses, meeting rooms, public institutions, schools, halls and garages.

LED Tubes



Asalite LED tube T8 glass 9W 60 cm 3000K/4000K/6500K (900 lumen)

Flickering-free, high lumen/watt LED tubes are recommended for a wide range of indoor applications. And they offer significant energy savings compared to the previous traditional type of T8 fluorescent tube.



















TECHNICAL DETAILS

Consumption	9W
LED type	SMD LED
Luminousity	900 lumens
Socket	G13
Colour temperature	3000K/4000K/6500K
Luminous efficacy	100 lumens/W
Size	26 x 604 x 590mm
Lifetime	25 000 hours
Circuit/Frequency	AC 180-240V, 50/60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0081, ASAL0082, ASAL0083

Asalite LED tube T8 glass 18W 120 cm 3000K/4000K/6500K (1800 lumen)

Flickering-free, high lumen/watt LED tubes are recommended for a wide range of indoor applications. And they offer significant energy savings compared to the previous traditional type of T8 fluorescent tube.

















TECHNICAL DETAILS

Consumption	18W
LED type	SMD LED
Luminousity	1800 lumens
Socket	G13
Colour temperature	3000K/4000K/6500K
Luminous efficacy	100 lumens/W
Size	26 x 1213 x 1199mm
Lifetime	25 000 hours
Circuit/Frequency	AC 180-265V, 50/60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0166, ASAL0076, ASAL0077

Asalite LED tube T8 glass 22W 150 cm 3000K/4000K/6500K (2200 lumen)

Flickering-free, high lumen/watt LED tubes are recommended for a wide range of indoor applications. And they offer significant energy savings compared to the previous traditional type of T8 fluorescent tube.





















Consumption	22W
LED type	SMD LED
Luminousity	2200 lumens
Socket	G13
Colour temperature	3000K/4000K/6500K
Luminous efficacy	100 lumens/W
Size	26 x 1513 x 1499mm
Lifetime	25 000 hours
Circuit/Frequency	AC 180-265V, 50/60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0078, ASAL0079, ASAL0080








Asalite Premium LED tube T8 glass 9W60 cm 4000K/6500K (1260 lumen) High luminosity

Flickering-free, high lumen/watt LED tubes are recommended for a wide range of indoor applications. And they offer significant energy savings compared to the previous traditional type of T8 fluorescent tube.





TECHNICAL DETAILS

Consumption	9W
LED type	Premium SMD LED
Luminousity	1260 lumens
Socket	G13
Colour temperature	4000K/6500K
Luminous efficacy	140 lumens/W
Size	26 x 604 x 590mm
Lifetime	30 000 hours
Circuit/Frequency	AC 180-265V, 50/60Hz
Energy rating	D
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0177, ASAL0178

D















Asalite Premium LED tube T8 glass 18W 120 cm 4000K/6500K (2520 lumen) High luminosity

Flickering-free, high lumen/watt LED tubes are recommended for a wide range of indoor applications. And they offer significant energy savings compared to the previous traditional type of T8 fluorescent tube.






















TECHNICAL DETAILS

Consumption	18W
LED type	Premium SMD LED
Luminousity	2520 lumens
Socket	G13
Colour temperature	4000K/6500K
Luminous efficacy	140 lumens/W
Size	26 x 1213 x 1199mm
Lifetime	30 000 hours
Circuit/Frequency	AC 180-265V, 50/60Hz
Energy rating	D
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0145, ASAL0160

Asalite Premium LED tube T8 glass 22W 150 cm 4000K/6500K (3080 lumen) High luminosity

Flickering-free, high lumen/watt LED





tubes are recommended for a wide range of indoor applications. And they offer significant energy savings compared to the previous traditional type of T8 fluorescent tube.















TECHNICAL DETAILS

Consumption	22W
LED type	Premium SMD LED
Luminousity	3080 lumens
Socket	G13
Colour temperature	4000K/6500K
Luminous efficacy	140 lumens/W
Size	26 x 1513 x 1499mm
Lifetime	30 000 hours
Circuit/Frequency	AC 180-265V, 50/60Hz
Energy rating	D
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0179, ASAL0180


Asalite LED tube starter T8 G13

The Asalite LED starter allows a LED tube to be inserted into the old fluorescent fixture. One starter per tubes must be placed in place of the old starter, and the luminaire modernized in this way is already operational.



Material	plastic/aluminium
Size	5x4cm
IP Class	IP20
Weight	2,3g
Product code	ASAL0209

LED Panels

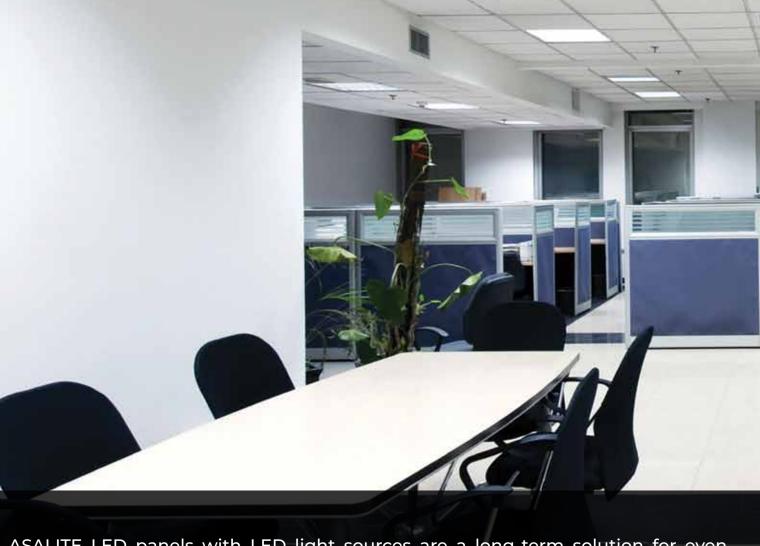

ASALITE LED panels with LED light sources are a long-term solution for even aesthetic and eye-pleasing interior lighting thanks to high-quality, reliable LED chips and the world-renowned LIFUD driver. The LED panel can be placed in a plasterboard ceiling, in an alu frame and with a hanging solution by wires.

As it is also recommended for everyday use, we recommend the product for lightening office buildings, warehouses, meeting rooms, public institutions, schools, halls and garages.





Asalite Premium LED Panel 60x60 cm 40W 4000K (4800 lumen) LIFUD driver

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.







40W













asalite PUALITY

asalite.

PUALITY

asalite. PUALITY



TECHNICAL DETAILS

Consumption	40W
LED type	SMD LED
Driver	LIFUD
Luminousity	4800 lumens
Colour temperature	4000K
Dimmable	no
Size	595 x 595 x 10 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	E
UGR	22
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0151

Asalite Premium LED Panel 60x60 cm 45W 4000K (5400 lumen) LIFUD NON-FLICKER

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.







45W









Lifūd





TECHNICAL DETAILS

Consumption	45W
LED type	SMD LED
Driver	LIFUD NON-FLICKER
Luminousity	5400 lumens
Colour temperature	4000K
Dimmable	no
Size	595 x 595 x 10 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	E
UGR	22
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0149

Asalite Premium LED Panel 60x60 cm 40W 4000K (4400 lumen) LIFUD driver UGR<19 low glare

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.



















TECHNICAL DETAILS

Consumption	40W
LED type	SMD LED
Driver	LIFUD
Luminousity	4400 lumens
Colour temperature	4000K
Dimmable	no
Size	595 x 595 x 10 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	E
UGR	< 19
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0175

Asalite Premium LED Panel 60x60 6500K 45W (5400 lumen) LIFUD NON-FLICKER

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.



















Lifud



Consumption	45W
LED type	SMD LED
Driver	LIFUD NON-FLICKER
Luminousity	5400 lumens
Colour temperature	6500K
Dimmable	no
Size	595 x 595 x 10 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	E
UGR	22
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0234



Asalite Premium LED Panel 60x60 6500K 40W (4800 lumen) LIFUD driver

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, we recommend the product for lightening hotels, schools, office buildings, hospitals, mm meeting rooms and public institutions.













Lifūd



asalite

asalite.

· ***

asaure. PUALITY

PUALITY

PUALITY

asalite.

TECHNICAL DETAILS

Consumption	40W
LED type	SMD LED
Driver	LIFUD
Luminousity	4800 lumens
Colour temperature	6500K
Dimmable	no
Size	595 x 595 x 10 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	E
UGR	22
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0235

Asalite Premium LED Panel BackLit 60x60cm 25W 4000K (4000 lumens) LIFUD NON-**FLICKER driver**

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.















Lifūd



TECHNICAL DETAILS

Consumption	25W
LED type	SMD LED
Driver	LIFUD NON-FLICKER
Luminousity	4000 lumens
Colour temperature	4000K
Dimmable	no
Size	595 x 595 x 30 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	С
UGR	22
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0247

Asalite Premium LED Panel BackLit 60x60cm 25W 4000K (3600 lumens) LIFUD NON-**FLICKER driver UGR>19**

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.



















TECHNICAL DETAILS

Consumption	25W
LED type	SMD LED
Driver	LIFUD NON-FLICKER
Luminousity	3600 lumens
Colour temperature	4000K
Dimmable	no
Size	595 x 595 x 30 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	D
UGR	>19
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
IF Cidas	11 20

Asalite Premium LED Panel 120x30 cm 40W 4000K (4800 lumen) LIFUD driver

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.

















Lifūd





Consumption	40W
LED type	SMD LED
Driver	LIFUD
Luminousity	4800 lumens
Colour temperature	4000K
Dimmable	no
Size	1195 x 295 x 10 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	С
UGR	22
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0152





Asalite Premium LED Panel 120x30cm 45W 4000K (5400 lumen) LIFUD NON-FLICKER

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.



PREMIUS .

asaure. PUALITY

PREMIUS .

asalite.

PUALITY

PREMIUTY.

asalite. PUALITY

PREMIULY.

asaure. PUALITY



45W










Lifūd





Asalite Premium LED Panel 120x30 cm 40W 4000K (4400 lumen) LIFUD driver UGR<19 low glare

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.













Lifud





TECHNICAL DETAILS


Consumption	45W
LED type	SMD LED
Driver	LIFUD NON-FLICKER
Luminousity	5400 lumens
Colour temperature	4000K
Dimmable	no
Size	1195 x 295 x 10 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	D
UGR	22
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0150

TECHNICAL DETAILS

40W
SMD LED
LIFUD
4400 lumens
4000K
no
1195 x 295 x 10 mm
25 000 hours
220-240V AC, 50-60Hz
E
< 19
> 80
> 0,9
IP20
ASAL0176

Asalite LED Panel 120x30 6500K 40W (4800 lumen) LIFUD NON-FLICKER

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, 1195 we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.















Lifud






TECHNICAL DETAILS

Consumption	40W
LED type	SMD LED
Driver	LIFUD NON-FLICKER
Luminousity	4800 lumens
Colour temperature	6500K
Dimmable	no
Size	1195 x 295 x 10 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	A+
UGR	22
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0236

Asalite LED Panel 120X30 6500K 45W (5400 lumen) LIFUD driver low glare

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, 1195 we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.



















Lifūd





Consumption	45W
LED type	SMD LED
Driver	LIFUD NON-FLICKER
Luminousity	5400 lumens
Colour temperature	6500K
Dimmable	no
Size	1195 x 295 x 10 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	A+
UGR	22
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0237

LED Panels



Premium LED **Panel BackLit** Asalite 120x30cm 25W 4000K (4000 lumens) LIFUD **NON-FLICKER driver**

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, 1195 we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.

















Lifud






TECHNICAL DETAILS

Consumption	25W
LED type	SMD LED
Driver	LIFUD NON-FLICKER
Luminousity	4000 lumens
Colour temperature	4000K
Dimmable	no
Size	1195 x 295 x 30 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	С
UGR	22
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0248

Asalite Premium LED Panel BackLit 120x30cm 25W 4000K (3600 lumens) LIFUD NON-FLICKER driver UGR>19

The Asalite LED panel contains reliable LED chips and a world-renowned LiFUD driver. As it is also recommended for everyday use, 1195 we recommend the product for lightening hotels, schools, office buildings, hospitals, meeting rooms and public institutions.



asalite

PUALITY











Lifud



TECHNICAL DETAILS

Consumption	25W
LED type	SMD LED
Driver	LIFUD NON-FLICKER
Luminousity	3600 lumens
Colour temperature	4000K
Dimmable	no
Size	1195 x 295 x 30 mm
Lifetime	25 000 hours
Circuit/Frequency	220-240V AC, 50-60Hz
Energy rating	D
UGR	> 19
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP20
Product code	ASAL0250

Asalite LED panel ceiling mounting frame 60x60 cm

The Asalite Ceiling Mounted Frame is suitable for mounting the 60x60 cm Premium LED Panel. If you choose surface mounting, we recommend purchasing this type of frame.



TECHNICAL DETAILS

Shape	square
Material	aluminium
Size	60 x 60 x 4 cm
IP Class	IP20
Weight	500g
Product code	ASAL0153

Asalite LED Panel Frame 60x60 cm (for BackLit Panels)

The Asalite Ceiling Mount Frame is suitable for mounting the 60x60 cm Premium LED Panel Backlit, if you choose a raised panel, we recommend purchasing this type of frame.

Thank to their white colour it ensures an aesthetic appearance in every interior (hotels, schools, office buildings, hospitals, meeting rooms).



Shape	square
Material	aluminium
Size	60 x 60 x 6,2 cm
IP Class	IP20
Weight	560g
Product code	ASAL0151



Asalite LED panel ceiling mounting frame 120x30 cm

The Asalite Ceiling Mounted Frame is suitable for mounting the 120x30 cm Premium LED Panel. If you choose surface mounting, we recommend purchasing this type of frame.




TECHNICAL DETAILS

Shape	rectangle
Material	aluminium
Size	120 x 30 x 4 cm
IP Class	IP20
Weight	620g
Product code	ASAL0154

Asalite LED Panel Frame 120x30 cm (for BackLit Panels)

The Asalite Ceiling Mount Frame is suitable for mounting the 120x30 cm Premium LED Panel Blacklit, if you choose a raised panel, we recommend purchasing this type of frame.

Thank to their white colour it ensures an aesthetic appearance in every interior (hotels, schools, office buildings, hospitals, meeting rooms).



Shape	rectangle
Material	aluminium
Size	120 x 30 x 6,2 cm
IP Class	IP20
Weight	640g
Product code	ASAL0252





Asalite hanging installation set for LED Panel, (60x60cm) 4pcs pack

The Asalite 4 pieces hanging installation set is suitable for mounting the 60x60 cm Premium LED Panel. If you choose hanging mounting, we recommend purchasing this type of installation set.



TECHNICAL DETAILS

Material	aluminium
Size	4pcs 100cm
IP Class	IP20
Weight	110g
Product code	ASAL0162

Asalite hanging installation set for Led Panels, (120x30cm) 6pcs pack

The Asalite 6 pieces hanging installation set is suitable for mounting the 120x30 cm Premium LED Panel. If you choose hanging mounting, we recommend purchasing this type of installation set.



TECHNICAL DETAILS

Material	aluminium
Size	6pcs 100cm
IP Class	IP20
Weight	140g
Product code	ASAL0163

Asalite mounting clips for LED Panels, (60x60cm) 4pcs pack

The Asalite 4pcs mounting clips kit is suitable for recessed installing the 60x60 cm Asalite Premium LED Panel in plasterboard ceiling.



TECHNICAL DETAILS

Material	aluminium
Size	5x4cm
IP Class	IP20
Wight	70g
Product code	ASAL0207

Asalite mounting clips for LED Panels, (120x30cm) 6pcs pack

The Asalite 6pcs mounting clips kit is suitable for recessed installing the 120x30 cm Asalite Premium LED Panel in plasterboard ceiling.



Material	aluminium
Size	5x4cm
IP Class	IP20
Wight	105g
Product code	ASAL0208





Asalite Premium IP65 triproof fixture for 2x60cm T8 LED tubes (2x9w tubes not incl.)

The Asalite Triproof fixture has high iP65 dust- and water resistance. The package does not include the LED tubes. The armature is equipped with all the necessary fastening clips and locks. It can be installed on wall and ceiling too, but with a hanging solution too. As it is also recommended for everyday use, we recommend the product in office buildings, warehouses, meeting rooms, public institutions, schools, or in rooms where the luminaire is exposed to excessive dirt. For example: car mechanic or carpenter workshops.



asalite.

TECHNICAL DETAILS

Type of socket	G13
Number of socket	2 place
Size	66 x 10,5 x 8,5 cm
Circuit	AC 220-240V
Frequency	50/60 Hz
Working temperature	-30 °C- +70 °C
Shape	rectangle
Shape Color	rectangle transparent/grey
`	
Color	transparent/grey
Color Material	transparent/grey metal/plastic

Asalite Premium IP65 triproof fixture for 2x120cm T8 LED tubes (2x18w tubes not incl.)

The Asalite Triproof fixture has high iP65 dust- and water resistance. The package does not include the LED tubes. The armature is equipped with all the necessary fastening clips and locks. It can be installed on wall and ceiling too, but with a hanging solution too. As it is also recommended for everyday use, we recommend the product in office buildings, warehouses, meeting rooms, public institutions, schools, or in rooms where the luminaire is exposed to excessive dirt. For example: car mechanic or carpenter workshops.



TECHNICAL DETAILS

Type of socket	G13
Number of socket	2 place
Size	126 x 10,5 x 8,5 cm
Circuit	AC 220-240V
Frequency	50/60 Hz
Working temperature	-30 °C- +70 °C
Shape	rectangle
Color	transparent/grey
Material	metal/plastic
Certificate	CE, LVD
IP Class	IP 65
Product code	ASAL155

Asalite Premium Ip65 triproof fixture for 2x150cm T8 LED tubes (2x22w tubes not incl.)

The Asalite Triproof fixture has high iP65 dust- and water resistance. The package does not include the LED tubes. The armature is equipped with all the necessary fastening clips and locks. It can be installed on wall and ceiling too, but with a hanging solution too. As it is also recommended for everyday use, we recommend the product in office buildings, warehouses, meeting rooms, public institutions, schools, or in rooms where the luminaire is exposed to excessive dirt. For example: car mechanic or carpenter workshops.



Type of socket	G13
Number of socket	2 place
Size	156 x 10.5 x 8.5 cm
Circuit	AC 220-240V
Frequency	50/60 Hz
Working temperature	-30 °C- +70 °C
Shape	rectangle
Color	transparent/grey
Color Material	transparent/grey metal/plastic
	<u> </u>
Material	metal/plastic





The Asalite LED High bays are characterised by high quality and excellent material use, modern refined form and long-term reliability. With these products, significant energy savings can be achieved in comparison to the previously used halogen incandescent high bays meanwhile providing higher luminosity tanks to the SMD led technology.

The aluminium cover design and IP65 water protection make them highly resistant to the changing environmental conditions and for that reason they are ideal for both outdoor and indoor use.

LED Highbay light

asalite.

Asalite Premium LED Highbay light 100W 4500K (9000 lumen)

The High bays with IP65 protection can light up the area at 120 degrees, thus they are optimal choices to illuminate warehouses, logistic centres, industrial plants, car showrooms, interiors with high ceilings and shopping centres. It is easy to instal them tanks to their supply cable of 45 cm.























Asalite Premium LED Highbay light 150W 4500K (13500 lumen)

The High bays with IP65 protection can light up the area at 120 degrees, thus they are optimal choices to illuminate warehouses, logistic centres, industrial plants, car showrooms, interiors with high ceilings and shopping centres. It is easy to instal them tanks to their supply cable of 45 cm.























Asalite Premium LED Highbay light 200W 4500K (18000 lumen)

The High bays with IP65 protection can light up the area at 120 degrees, thus they are optimal choices to illuminate warehouses, logistic centres, industrial plants, car showrooms, interiors with high ceilings and shopping centres. It is easy to instal them tanks to their supply cable of 45 cm.























TECHNICAL DETAILS


Consumption	100W
Luminousity	9000 lumens
Colour temperature	4500K
Dimmable	no
Size	Ф235x85mm
Lifetime	25 000 hours
Circuit/Frequency	170-265V AC, 50-60Hz
Energy rating	F
Lighting angle	120°
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP65
Product code	ASAL0226

TECHNICAL DETAILS

Consumption	150W
Luminousity	13 500 lumens
Colour temperature	4500K
Dimmable	no
Size	Ф285x85mm
Lifetime	25 000 hours
Circuit/Frequency	170-265V AC, 50-60Hz
Energy rating	F
Lighting angle	120°
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP65
Product code	ASAL0227

Consumption	200W
Luminousity	18 000 lumens
Colour temperature	4500K
Dimmable	no
Size	Ф315x85mm
Lifetime	25 000 hours
Circuit/Frequency	170-265V AC, 50-60Hz
Energy rating	F
Lighting angle	120°
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
IP Class	IP65
Product code	ASAL0228



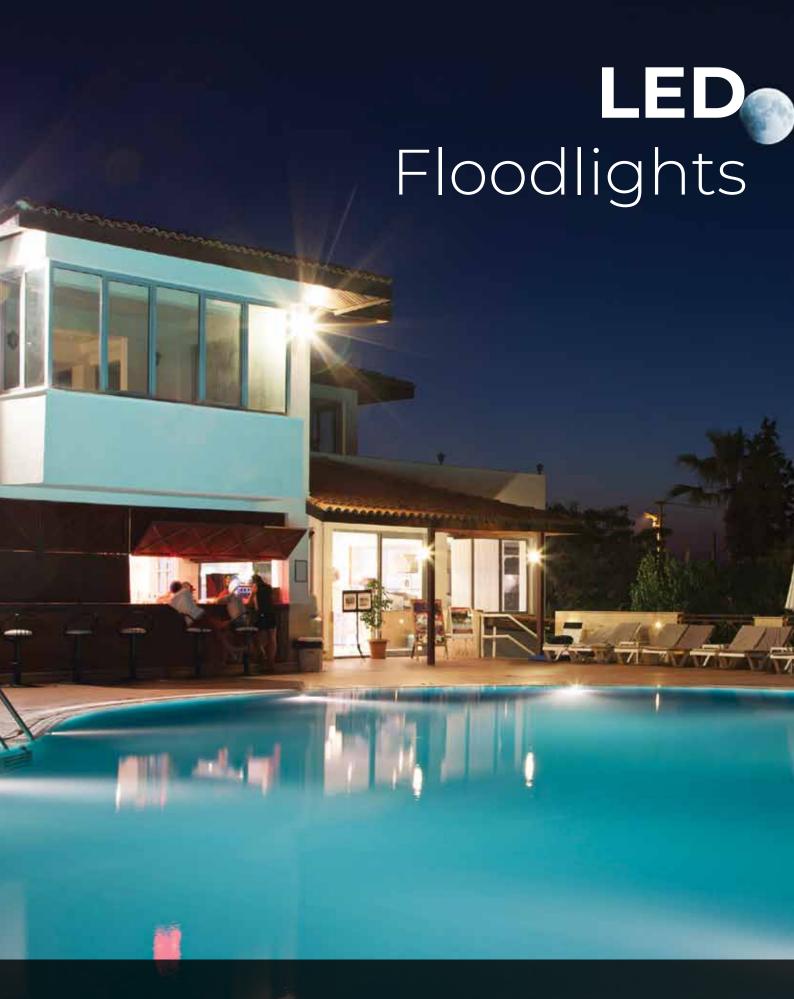

Outdoors, one of the most difficult tasks is to create the ideal lighting condition, although there is typically the greatest need for this. In our living area, the LED floodlight is the best solution for illuminating courtyards, driveways, terraces, and other areas around the house.

LED Floodlights



Asalite LED Floodlight Slim 10W 4500K/6500K (900 lumen)

LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck stops and other areas.





















Asalite LED Floodlight Slim 20W 4500K/6500K (1800 lumen)

LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck stops and other areas.
























Asalite LED Floodlight Slim 30W 4500K/6500K (2700 lumen)

LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck stops and other areas.











TECHNICAL DETAILS

Consumption	10W
LED type	SMD LED
Luminousity	900 lumens
Colour temperature	4500K/6500K
Dimmable	no
Size	98 x 70 x 28 mm
Lifetime	25 000 hours
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable lenght	35 cm
IP Class	IP65
Product code	ASAL0125, ASAL0126

TECHNICAL DETAILS

Consumption	20W
LED type	SMD LED
Luminousity	1800 lumens
Colour temperature	4500K/6500K
Dimmable	no
Size	118 x 90 x 28 mm
Lifetime	25 000 hours
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAL0112, ASAL0127

TECHNICAL DETAILS


Consumption	30W
LED type	SMD LED
Luminousity	2700 lumens
Colour temperature	4500K/6500K
Dimmable	no
Size	148 x 121 x 28 mm
Lifetime	25 000 hours
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAL0113, ASAL0128

Asalite LED Floodlight Slim 50W 4500K/6500K (4500 lumen)

LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck







LIGHTING



2700

4500K/6500K













Consumption	50W
LED type	SMD LED
Luminousity	4500 lumens
Colour temperature	4500K/6500K
Dimmable	no
Size	178 x 150 x 28 mm
Lifetime	25 000 hours
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAL0115, ASAL0130





Asalite LED Floodlight Slim 100W 4500K/6500K (9000 lumen)

LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck stops and other areas.





TECHNICAL DETAILS

Consumption	100W
LED type	SMD LED
Luminousity	9000 lumens
Colour temperature	4500K/6500K
Dimmable	no
Size	250 x 219 x 28 mm
Lifetime	25 000 hours
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAI 0133, ASAI 0134

F













Asalite LED Floodlight Slim 150W 4500K (12000 lumen)

LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck stops and other areas.





TECHNICAL DETAILS

Consumption	150W
LED type	SMD LED
Luminousity	12 000 lumens
Colour temperature	4500K
Dimmable	no
Size	320 x 230mm
Lifetime	25 000 hours
Circuit	AC 170-265V
Frequency	50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAL0215















Asalite LED Floodlight Slim 200W 4500K (16000 lumen)

LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck stops and other areas.





TECHNICAL DETAILS

Consumption	200W
LED type	SMD LED
Luminousity	16 000 lumens
Colour temperature	4500K
Dimmable	no
Size	380 x 265mm
Lifetime	25 000 hours
Circuit	AC 170-265V
Frequency	50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAL0216















Asalite LED Floodlight Slim 10W 4500K/6500K (900 lumen) + PIR sensor (black)

LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck stops and other areas.





Consumption	100W
LED type	SMD LED
Luminousity	900 lumens
Colour temperature	4500K/6500K
Dimmable	no
Size	118 x 165 x 45 mm
Sensor angle	> 180°
Sensor range	12 m
Lifetime	25 000 hours
Circuit/Frequency	AC 220-240V 50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAL0137, ASAL0138















LED Floodlights



Asalite LED Floodlight Slim 20W 4500K/6500K (1800 lumen) + PIR sensor (black)

LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck stops and other areas.
















Asalite LED Floodlight Slim 30W 4500K/6500K







Consumption	20W
LED type	SMD LED
Luminousity	1800 lumens
Colour temperature	4500K/6500K
Dimmable	no
Size	118 x 165 x 48 mm
Sensor angle	> 180°
Sensor range	12 m
Lifetime	25 000 hours
Circuit/Frequency	AC 220-240V 50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAL0139, ASAL0140



(2700 lumen) + PIR sensor (black)



















TECHNICAL DETAILS

TECHNICAL DETAILS

Consumption	30W
LED type	SMD LED
Luminousity	2700 lumens
Colour temperature	4500K/6500K
Dimmable	no
Size	148 x 195 x 48 mm
Sensor angle	> 180°
Sensor range	12 m
Lifetime	25 000 hours
Circuit/Frequency	AC 220-240V 50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAL0114, ASAL0129



LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck stops and other areas.























TECHNICAL DETAILS

Consumption	50W
LED type	SMD LED
Luminousity	4500 lumens
Colour temperature	4500K/6500K
Dimmable	no
Size	178 x 225 x 50 mm
Sensor angle	> 180°
Sensor range	12 m
Lifetime	25 000 hours
Circuit/Frequency	AC 220-240V 50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAL0116, ASAL0131

Asalite LED Floodlight Slim 100W 4500K/6500K (9000 lumen) + PIR sensor (black)

LED floodlights are the best solution for creating the ideal lighting conditions outdoors. In our living area or workplace it is also the optimal choice for lighting courtyards, terraces, driveways, truck stops and other areas.



















Consumption	100W
LED type	SMD LED
Luminousity	9000 lumens
Colour temperature	4500K/6500K
Dimmable	no
Size	250 x 295 x 48 mm
Sensor angle	> 180°
Sensor range	12 m
Lifetime	25 000 hours
Circuit/Frequency	AC 220-240V 50/60 Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Cable length	35 cm
IP Class	IP65
Product code	ASAL0135, ASAL0136

LED

Ceiling Lamps



Asalite LED Ceiling Lights with LED light sources are a decorative solution for even, aesthetic, and eye-pleasing lighting in the chosen room, thanks to their elegant shape and demanding lampshade. The wide range of Asalite ceiling lamps provides an ideal opportunity for the most optimal choice, as the products are available in five different capacities with exceptionally high brightness. Some types can also be controlled with a remote controller.

LED Ceiling Lamps



Asalite LED Ceiling lamp KATE 12W 3000K/4000K (900 lumen) **Round shape**

The 12W Asalite LED ceiling lamp provides an above market average of 900 lumens of light intensity at a 120-degree lighting angle, that is equivalent to a 65W traditional lightsource.



















Asalite LED Ceiling lamp BELLA 18W 3000K/4000K (1350 lumen) **Round shape**

The 18W Asalite LED ceiling lamp provides an above market average of 1350 lumens of light intensity at a 120-degree lighting angle, that is equivalent to a 90W traditional lightsource.





















Asalite LED Ceiling lamp JULIA 24W 3000K/4000K (1800 lumen) **Round shape**

The 24W Asalite LED ceiling lamp provides an above market average of 1800 lumens of light intensity at a 120-degree lighting angle, that is equivalent to a 115W traditional lightsource.





















Asalite LED Ceiling lamp NORAH 12W 3000K/4000K (900 lumen) **Diamond shape/Star pattern**

The 12W Asalite LED ceiling lamp provides an above market average of 900 lumens of light intensity at a 120-degree lighting angle, that is equivalent to a 65W traditional lightsource.





















TECHNICAL DETAILS

Consumption	12W (≈65W)
Built-in lightsource	Integrated LED
Luminousity	900 lumens
Colour temperature	3000K/4000K
Size	Ф255x60mm
Dimmable	no
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	170-265V AC 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0181, ASAL0182

TECHNICAL DETAILS

Consumption	18W (≈90W)
Built-in lightsource	Integrated LED
Luminousity	1350 lumens
Colour temperature	3000K/4000K
Size	Ф330х63mm
Dimmable	no
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0183, ASAL0184

TECHNICAL DETAILS

Consumption	24W (≈115W)
Built-in lightsource	Integrated LED
Luminousity	1800 lumens
Colour temperature	3000K/4000K
Size	Ф330х63mm
Dimmable	no
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0185, ASAL0186


Consumption	12W (≈65W)
Built-in lightsource	Integrated LED
Luminousity	900 lumens
Colour temperature	3000K/4000K
Size	Ф265x80mm
Dimmable	no
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0187, ASAL0188





Asalite LED Ceiling lamp ROSALIA 18W 3000K/4000K (1350 lumen) **Diamond shape/Star pattern**

The 18W Asalite LED ceiling lamp provides an above market average of 1350 lumens of light intensity at a 120-degree lighting angle, that is equivalent to a 90W traditional lightsource.





















Asalite LED Ceiling lamp VICTORIA 24W 3000K/4000K (1800 lumen) **Diamond shape/Star pattern**

The 24W Asalite LED ceiling lamp provides an above market average of 1800 lumens of light intensity at a 120-degree lighting angle, that is equivalent to a 115W traditional lightsource.





















Asalite LED Ceiling lamp LIZA 48W 3000K-6500K (3400 lumen) Diamond shape/Star pattern/Remote controller

The 48W Asalite LED ceiling lamp provides an above-market average of 3400 lumens of light intensity at a 120-degree lighting angle, which is equivalent to a 200W traditional lightsource. Both the color temperature from 3000K to 6500K and the brightness of the CCT (change color temperature) ceiling lamps can be steplessly adjusted with the remote control included in the package.























Asalite LED Ceiling lamp LIZA 48W 3000K-6500K (3400 lumen) Round shape/Star pattern/Remote controller

The 48W Asalite LED ceiling lamp provides an above-market average of 3400 lumens of light intensity at a 120-degree lighting angle, which is equivalent to a 200W traditional lightsource. Both the color temperature from 3000K to 6500K and the brightness of the CCT (change color temperature) ceiling lamps can be steplessly adjusted with the remote control included in the package.



















452 mm



TECHNICAL DETAILS

Consumption	18W (≈90W)
Built-in lightsource	Integrated LED
Luminousity	1350 lumens
Colour temperature	3000K/4000K
Size	Ф345x94mm
Dimmable	no
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0189, ASAL0190

TECHNICAL DETAILS

Consumption	24W (≈115W)
Built-in lightsource	Integrated LED
Luminousity	1800 lumens
Colour temperature	3000K/4000K
Size	Ф345x94mm
Dimmable	no
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0191, ASAL0192

TECHNICAL DETAILS

Consumption	48W (≈200W)
Built-in lightsource	Integrated LED
Luminousity	3400 lumens
Colour temperature	3000-6500K CCT
Light color	Change color temperature
Size	Ф412x97mm
Adjustable with remote controller	yes
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0193

Consumption	48W (≈200W)
Built-in lightsource	Integrated LED
Luminousity	3400 lumens
Colour temperature	3000-6500K CCT
Light color	Change color temperature
Size	Ф452x70mm
Adjustable with remote controller	yes
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0194

LED Ceiling Lamps



Asalite LED Ceiling lamp LIZA 48W 3000K-6500K (3400 lumen) Square shape/ Star pattern/Remote controller

The 48W Asalite LED ceiling lamp provides an above-market average of 3400 lumens of light intensity at a 120-degree lighting angle, which is equivalent to a 200W traditional lightsource. Both the color temperature from 3000K to 6500K and the brightness of the CCT (change color temperature) ceiling lamps can be steplessly adjusted with the remote control included in the package.



















fiza

Asalite LED Ceiling lamp EMMA 72W 3000K-6500K (5000 lumen) Round shape/Star pattern/Remote controller

The 72W Asalite LED ceiling lamp provides an above-market average of 5000 lumens of light intensity at a 120-degree lighting angle, which is equivalent to a350W traditional lightsource. Both the color temperature from 3000K to 6500K and the brightness of the CCT (change color temperature) ceiling lamps can be steplessly adjusted with the remote control included in the package.























Asalite LED Ceiling lamp EMMA 72W 3000K-6500K (5000 lumen) Square shape/ Star pattern/Remote controller

The 72W Asalite LED ceiling lamp provides an above-market average of 5000 lumens of light intensity at a 120-degree lighting angle, which is equivalent to a 350W traditional lightsource. Both the color temperature from 3000K to 6500K and the brightness of the CCT (change color temperature) ceiling lamps can be steplessly adjusted with the remote control included in the package.

























Asalite LED Ceiling lamp OLIVIA 48W 3000K-6500K (3400 lumen) Diamond shape/Remote controller

The 48W Asalite LED ceiling lamp provides an above-market average of 3400 lumens of light intensity at a 120-degree lighting angle, which is equivalent to a 200W traditional lightsource. Both the color temperature from 3000K to 6500K and the brightness of the CCT (change color temperature) ceiling lamps can be steplessly adjusted with the remote control included in the package.























TECHNICAL DETAILS

Consumption	48W (≈200W)
Built-in lightsource	Integrated LED
Luminousity	3400 lumens
Colour temperature	3000-6500K CCT
Light color	Change color temperature
Size	330x330x70mm
Adjustable with remote controller	yes
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0195

TECHNICAL DETAILS

Consumption	72W (≈350W)
Built-in lightsource	Integrated LED
Luminousity	5000 lumens
Colour temperature	3000-6500K CCT
Light color	Change color temperature
Size	Ф570X80mm
Adjustable with remote controller	yes
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0196

TECHNICAL DETAILS

Consumption	72W (≈350W)
Built-in lightsource	Integrated LED
Luminousity	5000 lumens
Colour temperature	3000-6500K CCT
Light color	Change color temperature
Size	432x432x73mm
Adjustable with remote controller	yes
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0197

Consumption	48W (≈200W)
Built-in lightsource	Integrated LED
Luminousity	3400 lumens
Colour temperature	3000-6500K CCT
Light color	Change color temperature
Size	Φ412x97mm
Adjustable with remote controller	yes
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0198





Asalite LED Ceiling lamp OLIVIA 48W 3000K-6500K (3400 lumen) Round shape/Remote controller

The 48W Asalite LED ceiling lamp provides an above-market average of 3400 lumens of light intensity at a 120-degree lighting angle, which is equivalent to a 200W traditional lightsource. Both the color temperature from 3000K to 6500K and the brightness of the CCT (change color temperature) ceiling lamps can be steplessly adjusted with the remote control included in the package.



















Asalite LED Ceiling lamp OLIVIA 48W 3000K-6500K (3400 lumen) Square shape/Remote controller

The 48W Asalite LED ceiling lamp provides an above-market average of 3400 lumens of light intensity at a 120-degree lighting angle, which is equivalent to a 200W traditional lightsource. Both the color temperature from 3000K to 6500K and the brightness of the CCT (change color temperature) ceiling lamps can be steplessly adjusted with the remote control included in the package.



















Asalite LED Ceiling lamp SOFIA 72W 3000K-6500K (5000 lumen) Round shape/Remote controller

The 72W Asalite LED ceiling lamp provides an above-market average of 5000 lumens of light intensity at a 120-degree lighting angle, which is equivalent to a 350W traditional lightsource. Both the color temperature from 3000K to 6500K and the brightness of the CCT (change color temperature) ceiling lamps can be steplessly adjusted with the remote control included in the package.



















Asalite LED Ceiling lamp SOFIA 72W 3000K-6500K (5000 lumen) Square shape/Remote controller

The 72W Asalite LED ceiling lamp provides an above-market average of 5000 lumens of light intensity at a 120-degree lighting angle, which is equivalent to a 350W traditional lightsource. Both the color temperature from 3000K to 6500K and the brightness of the CCT (change color temperature) ceiling lamps can be steplessly adjusted with the remote control included in the package.



















TECHNICAL DETAILS

Consumption	48W (≈200W)
Built-in lightsource	Integrated LED
Luminousity	3400 lumens
Colour temperature	3000-6500K CCT
Light color	Change color temperature
Size	Ф452x70mm
Adjustable with remote controller	yes
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V, 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0199

TECHNICAL DETAILS

Consumption	48W (≈200W)
Built-in lightsource	Integrated LED
Luminousity	3400 lumens
Colour temperature	3000-6500K CCT
Light color	Change color temperature
Size	330x330x70mm
Adjustable with remote controller	yes
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V, 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0200

TECHNICAL DETAILS

Consumption	72W (≈350W)
Built-in lightsource	Integrated LED
Luminousity	5000 lumens
Colour temperature	3000-6500K CCT
Light color	Change color temperature
Size	Ф570X80mm
Adjustable with remote controller	yes
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V, 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0201

Consumption	72W (≈350W)
Built-in lightsource	Integrated LED
Luminousity	5000 lumens
Colour temperature	3000-6500K CCT
Light color	Change color temperature
Size	432x432x73mm
Adjustable with remote controller	yes
Lifetime	25 000 hours
Switch on-off	15 000
Circuit/Frequency	AC 170-265V, 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0202

LED IP54 Dampproof



Asalite LED IP54 Dampproof Light 15W 4000K (1200 lumen) Oval

The Asalite LED wall lamps with IP54 protection are excellent for both outdoor and indoor use. Thanks to the high IP protection, they can be used in humid and cool environments alike. It is extremely quick and easy to install them. They are optimal choices for the illuminating our living environment (courtyards, terraces, driveways, etc).



















Asalite LED IP54 Sensor Dampproof Light 15W 4000K (1400 lumen) Oval

The Asalite LED wall lamps with IP54 protection are excellent for both outdoor and indoor use. Thanks to the high IP protection, they can be used in humid and cool environments alike. It is extremely quick and easy to install them. They are optimal choices for the illuminating our living environment (courtyards, terraces, driveways, etc).

















Asalite LED IP54 Sensor Dampproof Light 15W 4000K (1400 lumen) Round

The Asalite LED wall lamps with IP54 protection are excellent for both outdoor and indoor use. Thanks to the high IP protection, they can be used in humid and cool environments alike. It is extremely quick and easy to install them. They are optimal choices for the illuminating our living environment (courtyards, terraces, driveways, etc).





















Asalite LED IP54 Ceiling Light 24W 3000K/4000K/6500K (2400 lumen) Round

The Asalite LED ceiling lamps with IP54 protection have a wide range of functionality, are characterised by exclusive appearance and reliable quality. It is extremely quick and easy to install them. One of the three colour temperatures can be selected with the button on the side of the lamp. They are optimal choices for the illuminating our living environment (courtyards, terraces, driveways, etc.).





















TECHNICAL DETAILS

Consumption	15W (≈90W)
Luminousity	1200 lumens
Colour temperature	4000K
Size	212,2x119,2x44,5mm
Lifetime	25 000 hours
Switch on-off	12 500
IP Class	IP54
Dimmable	no
Beam angle	140°
Circuit/Frequency	AC 220-240V, 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0221

TECHNICAL DETAILS

Consumption	15W (≈98W)
Luminousity	1400 lumens
Colour temperature	4000K
Size	212,2x119,2x44,5mm
Lifetime	25 000 hours
Switch on-off	12 500
IP Class	IP54
Dimmable	no
Beam angle	140°
Circuit/Frequency	AC 220-240V, 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0219

TECHNICAL DETAILS

Consumption	15W (≈98W)
Luminousity	1400 lumens
Colour temperature	4000K
Size	Ф210x49mm
Lifetime	25 000 hours
Switch on-off	12 500
IP Class	IP54
Dimmable	no
Beam angle	140°
Circuit/Frequency	AC 220-240V, 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0220

Consumption	24W (≈147W)
Luminousity	2400 lumens
Colour temperature	3000K/4000K/6500K
Size	Ф280x53mm
Lifetime	25 000 hours
Switch on-off	12 500
IP Class	IP54
Dimmable	yes
Dimmable Beam angle	yes 120°
Beam angle	120°
Beam angle Circuit/Frequency	120° AC 220-240V, 50-60Hz
Beam angle Circuit/Frequency Energy rating	120° AC 220-240V, 50-60Hz F





Asalite LED IP54 Ceiling Light 36W 3000K/4000K/6500K (3600 lumen) Round

The Asalite LED ceiling lamps with IP54 protection have a wide range of functionality, are characterised by exclusive appearance and reliable quality. It is extremely quick and easy to install them. One of the three colour temperatures can be selected with the button on the side of the lamp. They are optimal choices for the illuminating our living environment (courtyards, terraces, driveways, etc.).

















Asalite LED IP65 Dampproof Light 18W 4000K (1350 lumen) Round

The Asalite LED ceiling lamps with IP65 protection are excellent for both outdoor and indoor use. Thanks to the high IP protection, they can be used in humid and cool environments alike. They are optimal choices for the illuminating our living environment (bathrooms, staircases, courtyards, terraces, driveways, etc).

















Asalite LED IP65 Dampproof Light 24W 4000K (1800 lumen) Round

The Asalite LED ceiling lamps with IP65 protection are excellent for both outdoor and indoor use. Thanks to the high IP protection, they can be used in humid and cool environments alike. They are optimal choices for the illuminating our living environment (bathrooms, staircases, courtyards, terraces, driveways, etc).



















Asalite LED IP65 Dampproof Light 30W 4000K (2200 lumen) Round

The Asalite LED ceiling lamps with IP65 protection are excellent for both outdoor and indoor use. Thanks to the high IP protection, they can be used in humid and cool environments alike. They are optimal choices for the illuminating our living environment (bathrooms, staircases, courtyards, terraces, driveways, etc).



















TECHNICAL DETAILS

Consumption	36W (≈? W)
Luminousity	3600 lumens
Colour temperature	3000K/4000K/6500K
Size	Ф330х53mm
Lifetime	25 000 óra
Switch on-off	12 500
IP Class	IP54
Dimmable	igen
Beam angle	120°
Circuit/Frequency	AC 220-240V, 50-60Hz
Energy rating	F
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0223

TECHNICAL DETAILS

Consumption	18W (≈90W)
Luminousity	1350 lumens
Colour temperature	4000K
Size	Ф220x88mm
Lifetime	25 000 hours
Switch on-off	12 500
IP Class	IP65
Dimmable	yes
Beam angle	110°
Circuit/Frequency	AC 220-240V, 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0229

TECHNICAL DETAILS

Consumption	24W (≈115W)
Luminousity	1800 lumens
Colour temperature	4000K
Size	Ф270х93mm
Lifetime	25 000 hours
Switch on-off	12 500
IP Class	IP65
Dimmable	yes
Beam angle	110°
Circuit/Frequency	AC 220-240V, 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,5
Product code	ASAL0230

Consumption	30W (≈136W)
Luminousity	2200 lumens
Colour temperature	4000K
Size	Ф320x102mm
Lifetime	25 000 hours
Switch on-off	12 500
IP Class	IP65
Dimmable	yes
Beam angle	110°
Circuit/Frequency	AC 220-240V, 50-60Hz
Energy rating	G
Color rendering index (Ra)	> 80
Power Factor (Pf)	> 0,9
Product code	ASAL0231



Asalite LED table lamps are characterized by long-term, reliable quality. The high brightness, the optimal color temperature, the easy mobility and the variability of the lamp position result in the preservation of the quality of vision even with occasional home use or regular and constant work use.





Asalite LED Table lamp 6W 4000K (500 lumen) black

Asalite LED table lamps are characterized by long-term, reliable quality. The high brightness, the optimal color temperature, the easy mobility and the variability of the position of the lamp result in the preservation of the quality of vision even with occasional use at home or regular and constant workplace.



















Asalite LED Table lamp 6W 4000K (500 lumen) white

Asalite LED table lamps are characterized by long-term, reliable quality. The high brightness, the optimal color tempera-ture, the easy mobility and the variability of the position of the lamp result in the preservation of the quality of vision even with occasional use at home or regular and constant workplace.



















Asalite LED Dimmable Desk Lamp 6W 4000K (480 lumen) black

The Asalite dimmerable desk lamps are characterised by high quality and long-term reliability. The power cord is 1,8 m long, thus it is easily moveable. Its soft and flexible silicone neck allows to adjust the position of the lamp. The luminous intensity can be adjusted with the threestage button on the base of the lamp.



















Asalite LED Dimmable Desk Lamp 6W 4000K (480 lumen) white

The Asalite dimmerable desk lamps are characterised by high quality and long-term reliability. The power cord is 1,8 m long, thus it is easily moveable. Its soft and flexible silicone neck allows to adjust the position of the lamp. The luminous intensity can be adjusted with the threestage button on the base of the lamp.

















TECHNICAL DETAILS

Consumption	6 W
LED type	SMD LED
Socket	EURO socket
Luminousity	500 lumens
Colour temperature	4000K
Dimmable	no
Size	137 x 400 mm
Lighting angle	120°
Lifetime	25 000 hours
Circuit/Frequency	AC 220-240V, 50/60 Hz
Energy rating	G
Color rendering index (Ra)	>80
Power Factor (Pf)	>0,5
Cable length	2 m
IP Class	IP20
Product code	ASAL0204

TECHNICAL DETAILS

Consumption	6 W
LED type	SMD LED
Socket	EURO socket
Luminousity	500 lumens
Colour temperature	4000K
Dimmable	no
Size	137 x 400 mm
Lighting angle	120°
Lifetime	25 000 hours
Circuit/Frequency	AC 220-240V, 50/60 Hz
Energy rating	G
Color rendering index (Ra)	>80
Power Factor (Pf)	>0,5
Cable length	2 m
IP Class	IP20
Product code	ASAL0203

TECHNIKAI ADATOK

Consumption	6 W
LED type	SMD LED
Socket	EURO socket
Luminousity	480 lumens
Colour temperature	4000K
Dimmable	yes
Size	275 x 115 x 490 mm
Lighting angle	120°
Lifetime	25 000 hours
Circuit/Frequency	AC 220-240V, 50/60 Hz
Energy rating	G
Color rendering index (Ra)	>80
Power Factor (Pf)	>0,5
Cable length	1,8 m
IP Class	IP20
Product code	ASAL0225

TECHNIKAI ADATOK

Consumption	6 W
LED type	SMD LED
Socket	EURO socket
Luminousity	480 lumens
Colour temperature	4000K
Dimmable	yes
Size	275 x 115 x 490 mm
Lighting angle	120°
Lifetime	25 000 hours
Circuit/Frequency	AC 220-240V, 50/60 Hz
Energy rating	G
Color rendering index (Ra)	>80
Power Factor (Pf)	>0,5
Cable length	1,8 m
IP Class	IP20
Product code	ASAL0224



Asalite special bulbs include refrigerator bulbs, oven bulbs and cooker-hood bulbs to illuminate our home electrical appliances. The product family also includes infrared bulbs, which are used in livestock breeding as well as in medicine.





Asalite Infrared Bulb G95 E27 100W 2800K **FULL RED**

The Asalite brand also offers a solution for a combination of high quality and long-term reliability for infrared bulbs. Their light and the heat they emit are soothing to the body and have a beneficial effect on blood circulation.









TECHNICAL DETAILS

Consumption	100 W
Socket	E27
Colour temperature	2800K
Size	95 x 136 mm
Lighting angle	180°
Dimmable	yes
Lifetime	5000 hours
Switch on-off	20 000
Circuit/Frequency	AC 220-240V / 50/60 Hz
Energy rating	G
Product color	red
Product code	ASAL0069













Asalite Infrared Bulb E27 100W/150W/250W **2800K RED**

The Asalite brand also offers a solution for a combination of high quality and long-term reliability for infrared bulbs. Their light and the heat they emit are soothing to the body and have a beneficial effect on blood circulation.





TECHNICAL DETAILS

Consumption	100W/150W/250W
Socket	E27
Colour temperature	2800K
Size	125 x 175 mm
Lighting angle	180°
Dimmable	yes
Lifetime	5000 hours
Switch on-off	20 000
Circuit/Frequency	AC 220-240V / 50/60 Hz
Energy rating	G
Product color	red
Product code	ASAL0040, ASAL0041, ASAL0042















Asalite Infrared Bulb E27 150W/250W 2800K **CLEAR**

The Asalite brand also offers a solution for a combination of high quality and long-term reliability for infrared bulbs. Their light and the heat they emit are soothing to the body and have a beneficial effect on blood circulation.







TECHNICAL DETAILS

Consumption	150W/250W
Socket	E27
Colour temperature	2800K
Size	125 x 175 mm
Lighting angle	180°
Dimmable	yes
Lifetime	5000 hours
Switch on-off	20 000
Circuit/Frequency	AC 220-240V / 50/60 Hz
Energy rating	G
Product color	transparent
Product code	ASAL0043, ASAL0044


















The Asalite brand also offers a solution for a combination of high quality and longterm reliability for special bulbs. Their light and the heat they emit are soothing to the body and have a beneficial effect on blood circulation. The Asalite 40W cooker-hood bulb is a light source used to illuminate cooker-hoods.









Consumption	40W
Socket	E14
Colour temperature	2800K
Size	25 x 82 mm
Lighting angle	360°
Dimmable	yes
Lifetime	1000 hours
Switch on-off	4000
Circuit/Frequency	AC 220-240V / 50/60 Hz
Energy rating	E
Product color	transparent
Working temperature	-20 °C- +40 °C
Product code	ASAL0039













Special Bulbs

asalite.

Asalite Refrigerator Bulb E14 15W/25W 2800K (80/180 lumen)

The Asalite brand also offers a solution for a combination of high quality and long-term reliability for special bulbs. Their light and $\mbox{\cite{$\xi$}}$ the heat they emit are soothing to the body and have a beneficial effect on blood circulation. The Asalite 15W refrigerator bulb is a light source used to light up cooling equipment.























TECHNICAL DETAILS

Consumption	15W/25W
Socket	E14
Luminousity	80/180 lumen
Colour temperature	2800K
Size	26 x 54 mm
Lighting angle	360°
Dimmable	yes
Lifetime	1000 hours
Switch on-off	4000
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	E
Working temperature	-30 °C
Product color	transparent
Product code	ASAL0034, ASAL0037

Asalite Oven Bulb 300°C E14 15W/25W 2800K (80/180 lumen)

The Asalite brand also offers a solution for a combination of high quality and longterm reliability for special bulbs. Their light and the heat they emit are soothing to the body and have a beneficial effect on blood circulation. The Asalite 15W oven bulb is a light source used to light up ovens.







Consumption	15W/25W
Socket	E14
Luminousity	80/180 lumen
Colour temperature	2800K
Size	22 x 49mm / 25 x 55mm
Lighting angle	360°
Dimmable	yes
Lifetime	1000 hours
Switch on-off	4000
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	E
Working temperature	+300 °C
Product color	transparent
Product code	ASAL0075, ASAL0038

















HALOGEN Lightsources



The Asalite brand is also a solution to the need for long-term reliable quality in the case of Halogen bulbs, keeping in mind the display of aesthetic design. Halogen bulbs offer the perfect alternative to older, traditional bulbs. Today, when protecting our environment is a priority in our lives, responsible thinking is also essential when choosing the right lighting. The elements present in the halogen bulbs together result in the so-called halogen cycle, due to which the tungsten evaporated in the bulbs and the halogen compound present in the gas space react to form tungsten oxide. As a result, the Asalite halogen bulbs can save up to 30% in energy compared to conventional bulbs.

Halogen lightsources



Asalite Halogen Bulb A55 globe E27 28W/42W/ 52W/70W 2800K (370/630/790/1120 lumen)

The Asalite brand is also a solution to the need for long-term reliable quality for halogen bulbs, keeping the aesthetic design in mind. The Asalite halogen bulbs are an ideal choice for any type of luminaire with the right socket in mind.



















TECHNICAL DETAILS

Consumption	28W/42W/52W/70W
Socket	E27
Luminousity	370/630/790/1120 lumens
Colour temperature	2800K
Size	55 x 100 mm
Lighting angle	360°
Dimmable	yes
Lifetime	2000 hours
Switch on-off	4000
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	С
Product code	ASAL0002, ASAL0003, ASAL0004, ASAL0005

Asalite Halogen Bulb G45 mini globe E14 18W/28W/42W 2800K (210/370/630 lumen)

The Asalite brand is also a solution to the need for long-term reliable quality for halogen bulbs, keeping the aesthetic design in mind. The Asalite halogen bulbs are an ideal choice for any type of luminaire with the right socket in mind.



















TECHNICAL DETAILS

Consumption	18W/28W/42W
Socket	E14
Luminousity	210/370/630 lumens
Colour temperature	2800K
Size	45 x 76 mm
Lighting angle	360°
Dimmable	yes
Lifetime	2000 hours
Switch on-off	4000
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	С
Product code	ASAL0054, ASAL0055, ASAL0056

Asalite Halogen Bulb C35 candle E14 18W/28W/42W (2800K 210/370/630 lumen)

The Asalite brand is also a solution to the need for long-term reliable quality for halogen bulbs, keeping the aesthetic design in mind. The Asalite halogen bulbs are an ideal choice for any type of luminaire with the right socket in mind.























TECHNICAL DETAILS

Consumption	18W/28W/42W
Socket	E14
Luminousity	210/370/630 lumens
Colour temperature	2800K
Size	35 x 100 mm
Lighting angle	360°
Dimmable	yes
Lifetime	2000 hours
Switch on-off	4000
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	С
Product code	ASAL0008, ASAL0009, ASAL0033

Asalite Halogen Bulb R63 spot E27 42W 2800K (400 lumen)

The Asalite brand is also a solution to the need for long-term reliable quality for halogen bulbs, keeping the aesthetic design in mind. The Asalite halogen bulbs are an ideal choice for any type of luminaire with the right socket in mind.

























Consumption	42W
Socket	E27
Luminousity	400 lumens
Colour temperature	2800K
Size	63 x 102 mm
Lighting angle	180°
Dimmable	yes
Lifetime	2000 hours
Switch on-off	4000
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	С
Product code	ASAL0105



Halogen lightsources

Asalite Halogen Bulb R50 spot E14 28W 2800K (270 lumen)

The Asalite brand is also a solution to the need for long-term reliable quality for halogen bulbs, keeping the aesthetic design in mind. The Asalite halogen bulbs are an ideal choice for any type of luminaire with the right socket in mind.























TECHNICAL DETAILS

Consumption	28W
Socket	E14
Luminousity	270 lumens
Colour temperature	2800K
Size	50 x 86 mm
Lighting angle	180°
Dimmable	yes
Lifetime	2000 hours
Switch on-off	4000
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	С
Product code	ASAL0104

Asalite Halogen Bulb GU10 spot 35W/52W 2800K (320/510 lumen)

The Asalite brand is also a solution to the need for long-term reliable quality for halogen bulbs, keeping the aesthetic design in mind. The Asalite halogen bulbs are an ideal choice for any type of luminaire with the right socket in mind.







Consumption	35W/52W
Socket	GU10
Luminousity	320/510 lumens
Colour temperature	2800K
Size	50 x 55 mm
Lighting angle	120°
Dimmable	yes
Lifetime	2000 hours
Switch on-off	4000
Circuit	AC 220-240V
Frequency	50/60 Hz
Energy rating	С
Product code	ASAL0006, ASAL0007

















LED portable lamps



As for the Asalite LED lamps, whether it is battery-operated or rechargeable battery-operated, for work or leisure, you will find everything from basic to professional. Thanks to the innovative development, our lamps are characterized by a sophisticated style and versatile, solid design, which in itself guarantees a long lifetime.





Asalite LED 10W Rechargeable Torch (800 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.





TECHNICAL DETAILS

TECHNICAL DETAILS

Consumption LED type

Luminousity

Working hours

Battery type

Function

Circuit

Material

IP Class

Charging time

Light distance

Product code

TECHNICAL DETAILS

Consumption	10W
LED type	CREE LED L2
Luminousity	max: 800 lumens min: 400 lumens
Size	166 x 70 mm
Working hours	high power: 6 hours / low power: 12 hours
Battery type	3 x 18650 Li-ion (2200mAh)
Charging time	8 hours
Accessories	USB cable, shoulder strap, 3 pcs 18650 Asalite akku
Functions	maximum/minimum/flashing
Light distance	max: 400 m / min: 200 m
Circuit	AC 100-240V
Material	metal
IP Class	IPX4
Product code	ASA30041

CREE LED XM-L2 T6 max: 500 lumens /

min: 100 lumens

3.5 hours

max: 270 m

AC 100-240V

ASAKX600

metal

IPX7

186 x 165 x 46 mm

high power: 3,5 hours

low power: 7,5 hours

1 x 18650 Li.ion / 3,7V (2200mAh)

charger, USB cable, 1 pcs 18650 Asalite akku

maximum/minimum/flashing











Asalite LED 6W Rechargeable Flashlight (500 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.



















Asalite LED 5W Rechargeable Flashlight with Zoom Function (400 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.









Consumption	5W
LED type	CREE LED XPG
Luminousity	max: 400 lumens / medium: 200 lumens / min: 100 lumens
Size	35,5 x 25,5 x 159 mm
Working hours	high power: 3 hours medium power: 5 hours low power: 10 hours
Battery type	1 x 18650 Li.ion / 3,7V (2200mAh)
Charging time	4 hours
Accessories	USB cable, 1 pc 18650 Asalite battery
Function	max./medium/min./SOS
Light distance	max: 150 m
Circuit	AC 100-240V
Material	metal
IP Class	IPX4
Product code	ASAL0167













Asalite LED 4W Rechargeable Flashlight with Car Power Socket (300 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.





















Consumption	4W
LED type	CREE LED XPG2 R5
Luminousity	max: 300 lumens min: 160 lumens
Size	116,5 x 28,2 x 20,5 mm
Working hours	high power: 1,2 hours low power: 3 hours
Battery type	Rechargeable with car power socket
Charging time	2-3 hours
Charge level indicator	Red LED
Function	maximum/minimum/flashing
Light distance	max: 160 m
Circuit	AC 12-24V
Material	metal
IP Class	IPX4
Product code	ASA16005

LED Battery Flashlight



Asalite LED Flashlight 13,5W (1500 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.





TECHNICAL DETAILS

TECHNICAL DETAILS

Consumption	13,5 W
LED type	PHILIPS LUXEON M LED
Luminousity	max: 1500 lumens / medium: 700 lumens / min: 350 lumens / flashing: 1500 lumens / SOS: 1500 lumens
Size	18 x 57 x 38,5 mm
Working hours	high power 10 h. / medium power: 20 h. / low power 40 h.
Battery type	3 x D alkaline batteries
Accessories	3 pcs D Asalite alkaline batteries
Function	max./medium/min./flash/SOS
Light distance	max: 370 m
Material	metal
IP Class	IPX7
Product code	ASA17006














Asalite LED Flashlight 3W (200 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.





















Asalite LED Flashlight 3W (90 lumen)

Asalite brand lamps are characterized functions played a key role in their design.







by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple











TECHNICAL DETAILS

Consumption	3 W
LED type	LED
Luminousity	max: 90 lumens
Size	162 x 50 mm
Working hours	high power: 2 hours low power: 4 hours
Battery type	2 x AA batteies
Accessories	no
Function	maximum/minimum
Light distance	max: 150 m
Material	metal/rubber
IP Class	IPX4
Product code	ASA19010

Asalite LED Flashlight 1,2W (130 lumen) Blister

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.



















Consumption	1,2 W
LED type	CREE LED XP-E2 R2
Luminousity	130 lumens
Size	137 x 17 mm
Working hours	3 hours
Battery type	2 x AAA alkaline batteries
Accessories	2 pcs AAA Asalite alkaline batteries
Function	1 function
Light distance	73 m
Material	metal
IP Class	IPX4
Product code	ASAL0205





Asalite LED Flashlight 1,2W (130 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.















TECHNICAL DETAILS

Consumption	1,2 W
LED type	CREE LED XP-E2 R2
Luminousity	130 lumens
Size	137 x 17 mm
Working hours	3 hours
Battery type	2 x AAA alkaline batteries
Accessories	2 pcs AAA Asalite alkaline batteries
Accessories Function	
	batteries
Function	batteries 1 function
Function Light distance	batteries 1 function 73 m

Asalite LED Flashlight 1W (50 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.




















TECHNICAL DETAILS



Asalite LED Rubber Torch 0,75W (10 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.







TECHNICAL DETAILS

Consumption	0,75 W
LED type	LED
Luminousity	10 lumens
Size	196 x 65 mm
Working hours	40 hours
Battery type	2 x D alkaline batteries
Accessories	no
Accessories Function	no 1 function
Function	1 function
Function Light distance	1 function













Asalite LED Worklight 3W + 1,5W (100 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.







Consumption	3W + 1,5W
LED type	3W COB LED + 3 x 0,5 W SMD LED
Luminousity	100 lumens COB LED, 20 lumens SMD LED
Size	62 x 88 mm
Working hours	5 hours
Battery type	3 x AAA zinc-carbon batteries
Accessories	3 pcs AAA Asalite zinc-carbon batteries
Function	2 functions, hanger
Light distance	10 m
Material	plastic/magnet
IP Class	IPX3
Guarantee	1 year
Product code	ASAL0212













LED Battery Lamp



Asalite LED Silicone bikelamp 0,2W (7 Lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. The practicality and wide usability due to the multiple functions played a key role in their design.





asalite















Asalite Rechargeable Li-ion battery 18650 2200mAh BL2

Asalite 18650 Rechargeable Li-Ion Battery 2200mAh high capacity Protection circuitry to prevent short cir-

Pressure vents to prevent explosions More than 500 charge cycles Voltage: 3.7V Charging Current


















TECHNICAL DETAILS

Consumption	0,2 W
LED type	SMD LED
Luminousity	7 lumens
Size	45 x 35 x 2,5 mm
Working hours	50 hours
Battery type	2 x CR2032 coin batteries
Accessories	2 pcs CR2032 coin batteries
Function	1 function
Light distance	6 m
Light distance Material	6 m silicon

Size	18,6 x 69 mm
Lifetime	500 Recharge cycle
Battery type	2 x 18650 batteries
Charging	rechargeable
Charging current	minimum: 1A, maximum: 2A
Current voltage	3,7 V
Product code	ASAL0238



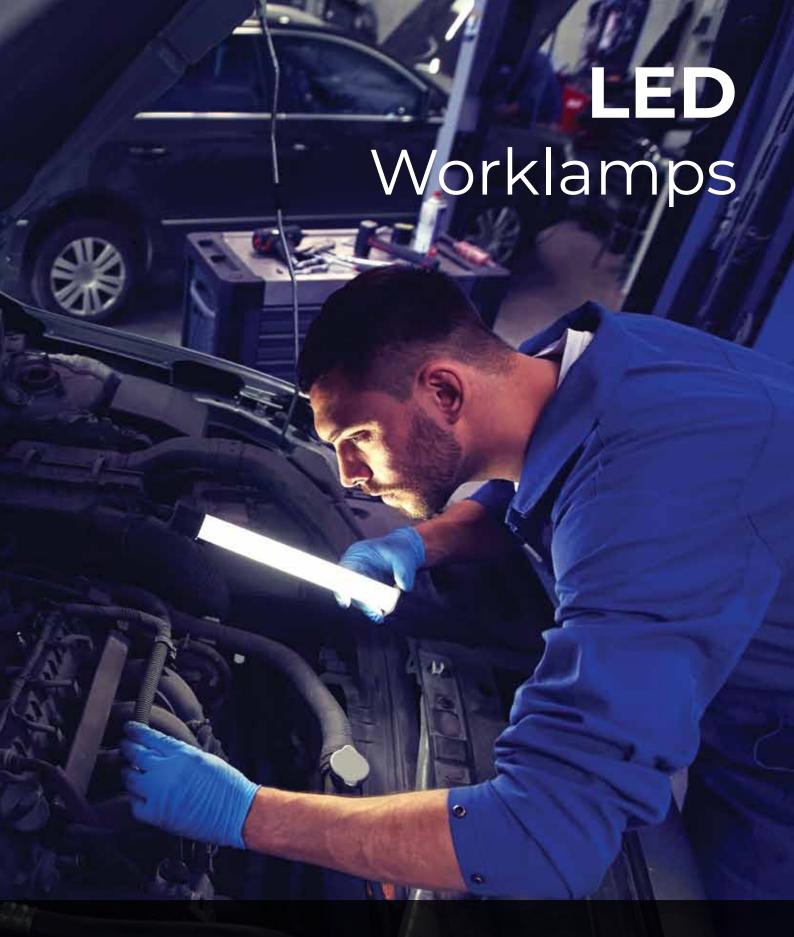

Products with the Premium Asalite Quality logo are characterized by outstanding quality and use of materials, as well as long-term reliability, and are considered to be extremely innovative in terms of functionality. Asalite LED Work Lights are preferred beyond home usage, for example during construction work, in car repair shops, where the oil-resistant design is one of the most suitable choices. Our work lights also prove useful during leisure activities, such as fishing.

LED Worklamps



Asalite Premium Rechargeable LED Worklamp 10W (1100 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. Practicality and extensive usability due to multiple functions played a key role in their design. Premium Asalite Quality products are the that has gained recognition in several countries of the European Union.

















TECHNICAL DETAILS

Consumption	10 W
LED type	COB LED
Luminousity	max. power: 1100 lumens/ min. power: 400 lumens
Size	165 x 186 x 46 mm
Working hours	max. power: 3 h / min. power: 6 h
Battery type	2 x 18650 Li-ion (2400mAh)
Charging time	6 hours
Accessories	charger (5V 1A), USB charger cable, 2 pcs 18650 Asalite rechargeable batteries
Functions	maximum/minimum
Lighting distance	max: 50m
Circuit	AC 100-240V
Product material	metal/rubber
IP Class	IPX4
Product code	ASAL0241

Asalite Premium Rechargeable LED Worklamp 20W (1500 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. Practicality and extensive usability due to multiple functions played a key role in their design. Premium Asalite Quality products are the result of innovative product development $\, \, \stackrel{\mbox{\tiny \'el}}{\mathbb{Z}} \,$ that has gained recognition in several countries of the European Union.



















TECHNICAL DETAILS

Consumption	20 W
LED type	COB LED
Luminousity	max. power: 1500 lumens/ min: power 400 lumens
Size	165 x 186 x 46 mm
Working hours	max. power: 2 h / min. power: 6 h
Battery type	2 x 18650 Li-ion (2400mAh)
Charging time	6 hours
Accessories	charger (5V 1A), USB charger cable, 2 pcs 18650 Asalite rechargeable batteries
Function	maximum/minimum
Lighting distance	max: 60m
Circuit	AC 100-240V
Product material	metal/rubber
IP Class	IPX4
Product code	ASAL0240

Asalite Premium Rechargeable Oilproof Worklamp 6W + 1W LED

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. Practicality and extensive usability due to multiple functions played a key role in their design. Premium Asalite Quality products are the result of innovative product development that has gained recognition in several countries of the European Union.















TECHNICAL DETAILS

Consumption	6W+1W
LED type	COB LED
Luminousity	Floodlight mode white light: 550 lumens / medium: 220 lumens / min: 22 lumens. Red light mode: max. 30 lumens. Flashlight mode white light: max 80 lumens / min: 40 lumens.
Size	33 x 151 x 45 mm (close), 33 x 270 x 45 mm (open)
Working hours	Floodlight mode white light: max. 2,5 hours. Red light mode: max. 7 hours. Flashlight mode white light: max 8 hours.
Battery type	1 x 18650 Li-ion / 3,7V (2000mAh)
Charging time	3 hours
Accessories	USB charging cable, 1 pcs 18650 rechgargeable battery
Function	Floodlight (3 modes)/ Red (2 modes)/ Flashlight (2 modes)
Lighting distance	max: 10m
Circuit	AC 100-240V
Product material	metal/ABS+TPE
IP Class	IPX5 + oilproof
Product code	ASAL0170

Asalite Premium LED Rechargeable Oilproof Worklamp 3W + 3W (380 lumen)

Asalite brand lamps are characterized by high quality and material use as well as long-term reliability. Practicality and extensive usability due to multiple functions played a key role in their design. Premium Asalite Quality products are the result of innovative product development that has gained recognition in several countries of the European Union.
















Consumption	3W+3W
LED type	3W Bright XPG3 LED + 3W COB LED
Luminousity	Floodlight mode max: 380 lumens / medium: 160 lumens / min: 12 lumens. Flashlight mode: max 280 lumens / min: 60 lumens.
Size	55 x 123 x 32 mm (close), 55 x 215 x 32 mm (open)
Working hours	Floodlight mode max: 5,5 hours / medium: 10 hours / min: 102 hours. Flashlight mode: max 7 hours / min: 36 hours.
Battery type	1 x 18650 Li-ion / 3,7V (2600mAh)
Charging time	4 hours
Accessories	USB charging cable, 1pc 18650 Asalite rechargeable battery
Function	Floodlight (3 modes) / Flashlight (2 modes)
Lighting distance	max: 10m
Circuit	AC 100-240V
Product material	metal/ABS+PA66-GF30
IP Class	IPX5 + oilproof
Product code	ASAL0161

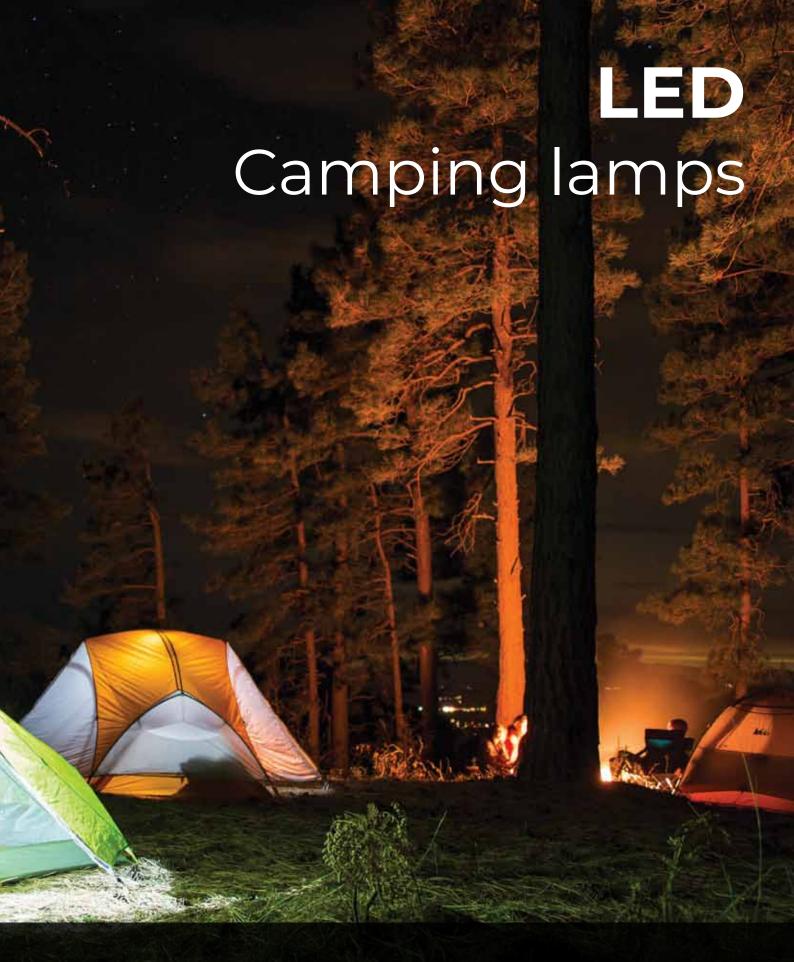

Asalite camping lights offer an option for a wide range of usage due to their various functions. We recommend this product category for those who like hiking, fishing, hiking and camping. Unlike other lamps, these lamps have extra functions in addition to several brightness modes, such as: floodlight and direct light, high water resistance, or insecticide, insect repellent and power bank functions.

LED Camping Lamps



Asalite Rechargeable LED Camping Lantern 8W (350 lumen)

Asalite brand lamps are characterized by high quality and material usage, as well as long-term reliability. Practicality and extensive usability due to multiple functions played a key role in their design. Premium Asalite Quality products are the result of innovative product development that has received recognition in several countries of the European Union.

















TECHNICAL DETAILS

Consumption	8 W
LED type	SMD LED
Luminousity	max: 350 lumens
Size	82 x 82 x 182 mm
Working hours	max. power: 3 hours
Battery type	2 x 18650 Li-ion / 3,7V (2200mAh)
Charging time	6 hours
Accessories	USB charging cable, 2 pcs 18650 Asalite Regchargeable batteries
Function	maximum/medium/minimum/ flashing
Lighting distance	max: 5m
Circuit	AC 100-240V
Product material	ABS+rubber
IP Class	IPX4
Product code	ASA1800CAMP

Asalite Premium Rechargeable LED Camping Llantern+Mosquito Killer 4,5W+4,5W+2,5W (350 lumen)

Asalite brand lamps are characterized by high quality and material usage, as well as long-term reliability. Practicality and extensive usability due to multiple functions played a key role in their design. Premium Asalite Quality products are the result of innovative product development that has received recognition in several countries of the European Union.



















TECHNICAL DETAILS

Consumption	4,5W+4,5W+2,5W
LED type	3W COB Osram LED / 9 x 0,5W SMD LED / 5 x 0,5W UV LED
Luminousity	Camping lantern mode max: 350 lumens / min: 100 lumens, Flashlight mode: 300 lumens, SOS mode: 320 lumens
Size	90 x 135 mm
Working hours	Camping lantern mode max power: 8 hours / min power: 16 hours, Flashlight mode: 10 hours, SOS mode: 9 hours, Mosquito killer mode: 12 hours
Battery type	1 x 18650 Li-ion / 3,7V (2200mAh)
Charging time	3,5 hours
Accessories	USB charging cable (5V 1A), 1 pc 18650 Asalite recharge battery
Function	Camping lantern mode: min/max / Flash- light mode / SOS / Mosquito killer mode
Lighting distance	max: 100m
Circuit	AC 100-240V
Product material	ABS
IP Class	IPX6
Product code	ASAL0242

Asalite Premium Rechargeable LED Camptube + Mosquito Repellent 3,5W+2W (280 lumen)

Asalite brand lamps are characterized by high quality and material usage, as well as long-term reliability. Practicality and extensive usability due to multiple functions played a key role in their design. Premium Asalite Quality products are the result of innovative product development that has received recognition in several countries of the European Union.



asalite.

PUALITY



24 mm















TECHNICAL DETAILS

Consumption	3,5W+2W
LED type	3,5W SMD LED / 2W LED Flashlight
Luminousity	max: 280 lumens
Size	24 x 24 x 4 mm
Working hours	8 hours / medium power: 20 hours / min. power: 30 hours / Flashlight mode: 20 hours / Repellent mode: 20 hours
Battery type	2 x 18650 Li-ion / 3,7V (4400mAh)
Charging time	5 hours
Accessories	USB charging cable, armband, 2 pcs 18650 Asalite rechargeable batteries
Function	max./medium/min./flashlight mode/ repellent mode/red-whote flash mode/ IC turn off/power bank
Lighting distance	max: 150m
Circuit	AC 100-240V
Product material	PC + aluminium
IP Class	IP68 (3m)
Product code	ASA25CAMPTUBE

Asalite LED Rechargeable Llantern 10W (1300 lumen)

The Asalite branded products are characterised by high quality, excellent material use and long-term reliability. Practicality and wide usability with several functions played a key role in their design. The Asalite rechargeable 10W LED Floodlight is a dual-function hand lamp powered by a 10W extra-bright SMD LED. The Floodlight scatters the light for 10 meters and has an operating time of up to 12 hours.







Consumption	10 W
LED type	11db SMD LED
Luminousity	max.: 1300 lumens, min.: 650 lumens
Size	173 x 125 x 43 mm
Working hours	max. power: 2,5 hours min. power: 5 hours
Battery type	2 x 18650 Li-ion / 3,7V (2000mAh)
Charging time	4 hours
Accessories	USB charging cable
Function	maximum / minimum
Lighting distance	max: 10 m
Circuit	Input 5V2A , Power bank: Output 5V1A
Product material	PC + aluminium + gumi
IP Class	IPX4
Product code	ASAL0239













LED Headlamps



In the Asalite Headlamp family, everyone can find the best choice for them, be it for work or any leisure outdoor activity! Our Headlamps are modern in design, easy to handle, comfortable and easy to wear, and have economical use. We have enriched all our lamps with multiple brightnesses and many features.

LED Headlamps



Asalite Premium LED Rechargeable Headlamp 5W (350 lumen)

The main convenience feature of headlamps is to leave our hands free. We take advantages of them at camping, night tours, but even at home. The light source of today's headlamps is almost solely LED, & which consumes little, is bright and has a $^{\mbox{\scriptsize 8}}$ long lifetime.



asaLite.



TECHNICAL DETAILS

Consumption	5 W
LED type	5W CREE XPG3 S3 LED / 1W white LED / 0,5W red LED
Luminousity	max: 350 lumens
Size	56 x 42 mm
Working hours	max. power: 2,2 hours/ medium power: 6 hours / red LED: 8 hours
Battery type	1 x 18650 Li-ion / 3,7V (2200mAh)
Charging time	2,5 hours
Accessories	USB charging cable, 1 pc 18650 Asalite recharge battery, Asalite headband
Function	white LED medium power + focus LED / white LED max power + focus LED / red LED max power
Lighting distance	max: 100m
Circuit	AC 100-240V
Charging	5V 1A (charging indicator light)
Product material	PC
IP Class	IPX6
Product code	ASA6820ULTRA













Asalite Rechargeable LED Sensor Headlamp 3W (200 lumen) Black

The main convenience feature of headlamps is to leave our hands free. We take advantages of them at camping, night tours, but even at home. The light source of today's headlamps is almost solely LED, which consumes little, is bright and has a long lifetime.

















Asalite Rechargeable LED Sensor Headlamp 3W (200 lumen) White

The main convenience feature of headlamps is to leave our hands free. We take advantages of them at camping, night tours, but even at home. The light source of today's headlamps is almost solely LED, which consumes little, is bright and has a long lifetime.

















Asalite Cree LED Headlamp 3W (285 lumen) **Blister**

The main convenience feature of headlamps is to leave our hands free. We take advantages of them at camping, night tours, but even at home. The light source of today's headlamps is almost solely LED, which consumes little, is bright and has a 3 long lifetime.

















TECHNICAL DETAILS

Consumption	3 W
LED type	3W CREE LED / 2 pcs red SMD LED
Luminousity	max: 200 lumens
Size	60 x 40 x 35 mm
Working hours	white light max power: 4 hours / medium power: 10 hours / flash mode: 20 hours / red light max: 40 hours / red light flash mode: 80 hours
Battery type	1 x 14650 Li-ion (1200mAh)
Charging time	2,5 hours
Accessories	USB charging cable, 1pcs 14650 Asalite rechargeable battery, Asalite headband
Function	white LED max / medium / flash mode / red light / red light flash / sensor mode
Lighting distance	max: 60m
Circuit	AC 100-240V
Charging	5V 1A (charging indicator light)
Product material	PC
IP Class	IPX4
Product code	ASAL0169

TECHNICAL DETAILS

Consumption	3 W
LED type	3W CREE LED / 2 pcs red SMD LED
Luminousity	max: 200 lumens
Size	60 x 40 x 35 mm
Working hours	white light max power: 4 hours / medium power: 10 hours / flash mode: 20 hours / red light max: 40 hours / red light flash mode: 80 hours
Battery type	1 x 14650 Li-ion (1200mAh)
Charging time	2,5 hours
Accessories	USB charging cable, 1pcs 14650 Asalite rechargeable battery, Asalite headband
Function	white LED max / medium / flash mode / red light / red light flash / sensor mode
Lighting distance	max: 60m
Circuit	AC 100-240V
Charging	5V 1A (charging indicator light)
Product material	PC
IP Class	IPX4
Product code	ASAL0168

Consumption	3 W
LED type	3W CREE XPE LED / 3 pcs COB LED (white/red/green)
Luminousity	CREE+ COB LED max. power: 285 lumens CREE LED max. power: 190 lumens CREE LED min. power: 60 lumens COB LED white: 140 lumens COB LED red: 7 lumens COB LED green: 26 lumens
Size	60 x 40 x 35 mm
Working hours	max. power: 8 hours
Battery type	3 x AAA Super alkaline batteries
Charging time	3 pcs AAA Asalite batteries, Asalite headband
Accessories	CREE+COB LED: maximum / minimum / CREE flash / COB LED: white/red/green
Function	max: 82m
Product material	PC
IP Class	IPX4
Product code	ASAL0206





Product code: ASA-DSP-00841

The use of a display is very common, one of the reasons being that it is a good advertising tool not only for the product but also for the store. Manufacturers are encouraging the increase their product sales data by making the display available, which also means it's also increasing the sales data of the store that sells the product. Another advantage of using a display is that it is a good advertising and decorative tool for the user store due to its attention-grabbing effect.

Asalite Lighting Kft.

Phone: +36 70 433 3200 E-mail: info@asalite.com

Headquarters: 4033 Debrecen, Vak Bottyán u. 22/A. Warehouse: 4002, Külső Kassai út 57. Debrecen, Hungary

www.asalite.com

