



Red Spot offset bolted tags fuse links

TFP



Catalogue numbers	Rated voltage	Rated current (Amps)	Breaking capacity	Operating class	Pt (A ² s)		Fixing centre (mm)	Pack quantity	Alternative fuse links
					Pre-arcing	Total at rated voltage			
TFP125	660-690 V a.c./ 350 V d.c.	125	80 kA	gG	25000	140000	94	10	M14-660
TFP160		160	80 kA	gG	62000	270000			
TFP200	200	80 kA	gG	105000	430000				
TFP200M250	200M250	80 kA	gM	200000	870000	1			

* DEO rated at 550 V a.c.

Dimensions - mm

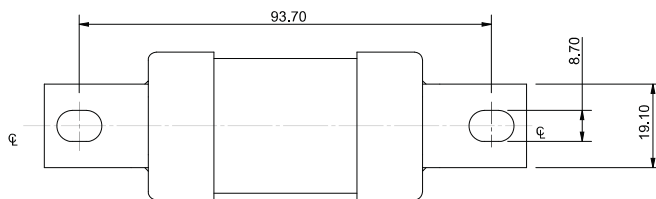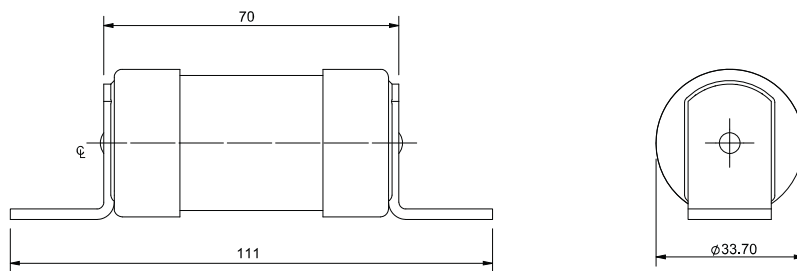


TFP125 to TFP200

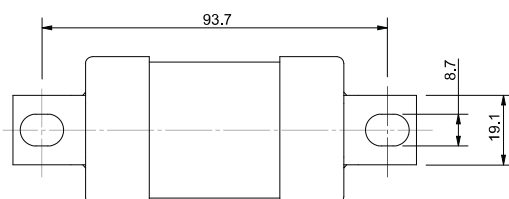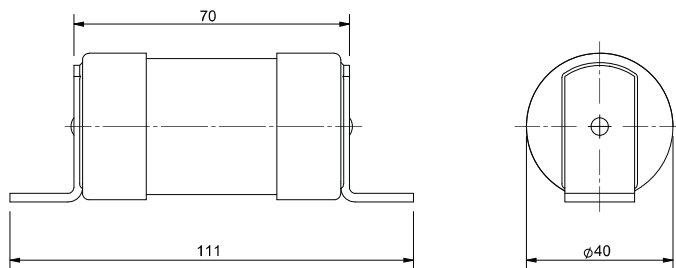

TFP200M250

TFP

Time current curve

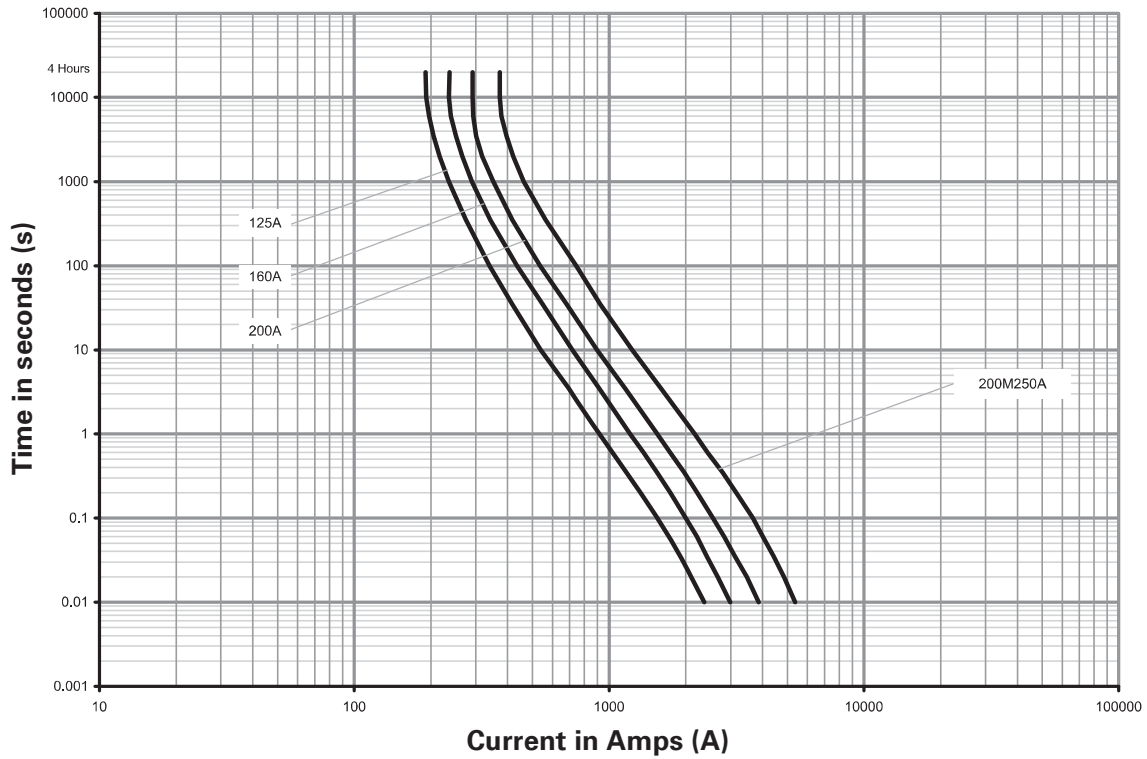

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton
 EMEA Headquarters
 Route de la Longeraie 7
 1110 Morges, Switzerland

Eaton Electrical Products Limited
 Melton Road
 Burton-on-the-Wolds
 Leicestershire, LE12 5TH
 United Kingdom

© 2017 Eaton
 All Rights Reserved
 PDF Only
 Publication No. 10020
 October 2017



Eaton is a registered trademark.

All other trademarks are property of their respective owners.