

## A538 - Three-Sided

### Standard Features

- .050" material thickness - 304 stainless steel
- Standard finishes available - US32D, US32, US10\*, US10B\*, US3\* and US4\*
- Fasteners provided - #6 x 5/8" Phillips flat head, undercut sheet metal screws
- Specify any length up to 120"
- For use on 1-3/4" door

### Fire Rating











ABH edge guards come standard UL fire rated for use on:

- Wood or plastic-covered wood composite fire doors rated up to and including 1-1/2 hours
- Hollow metal, steel-covered, composite type fire doors rated up to and including 3 hours

### Options

- Cut-Outs** - ABH offers numerous cut-outs for door hardware - see pages H-6 to H-7 for details. Contact factory for custom cut-outs.
- AS** - Adjustable Studs allow for up to 3/8" alignment correction
- SEC** - Security fasteners
- Custom leg sizes available
- Custom door thicknesses available

\*These finishes only available in 42" or smaller

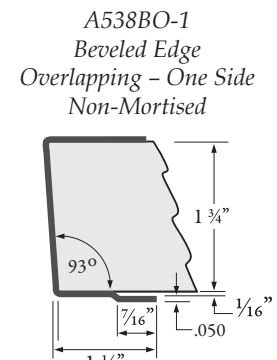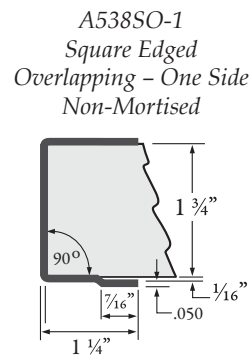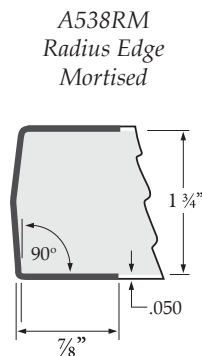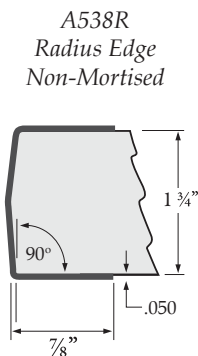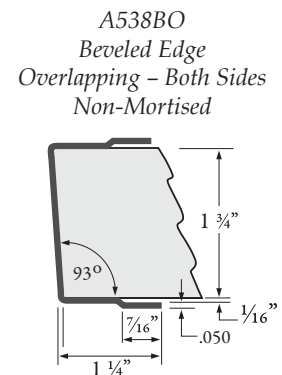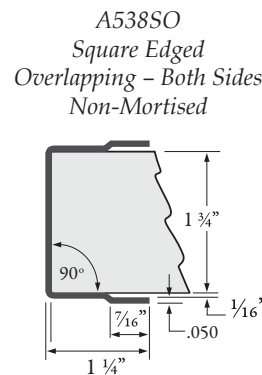



US32D - 630 - Satin Stainless Steel



US26D - 626 - Satin Chrome



US10B - 613 - Oil Rubbed Bronze



US10 - 612 - Satin Bronze



US4 - 606 - Satin Brass



S1 - 689 - Painted Aluminum



S2 - Painted Brass (to match US4)



S3 - Painted Bronze (to match US10)



S4 - Painted Black



S5 - Painted Dark Bronze (to match US10B)



S8 - Painted White



US3 - 605 - Bright Brass



US32 - 629 - Bright Stainless Steel



US26 - 625 - Bright Chrome