


# Kerf-In Weatherstrip

## Foam

- Pemko's "Q" foam kerf-in weatherstrip is constructed from soft cell foam enclosed by an embossed, tear-resistant, low-friction, UV-stable polyethylene cover
- Includes rigid PVC insert with extended flange for fast and easy kerf installation


### Q102\_

AVAILABLE FINISHES: **BL, D, W**  
 AVAILABLE LENGTHS: **36", 85", 97", 121"**  
 Minimum space between the door face and the stop is  $\frac{5}{16}$ "; maximum space is  $\frac{1}{2}$ "




### Q103\_

AVAILABLE FINISHES: **BL, D, W**  
 AVAILABLE LENGTHS: **36", 85", 97", 121"**  
 Minimum space between the door face and the stop is  $\frac{3}{16}$ "; maximum space is  $\frac{5}{16}$ "




### Q106\_

AVAILABLE FINISHES: **D, W**  
 AVAILABLE LENGTHS: **36", 85", 97", 121"**  
 Minimum space between the door face and the stop is  $\frac{5}{16}$ "; maximum space is  $\frac{1}{2}$ "




### Q107\_

AVAILABLE FINISHES: **BL, W**  
 Minimum space between the door face and the stop is  $\frac{1}{8}$ "; maximum space is  $\frac{7}{16}$ "  
 Sold per foot (specify length)



### Q108\_

AVAILABLE FINISHES: **BL, W**  
 Minimum space between the door face and the stop is  $\frac{1}{8}$ "; maximum space is  $\frac{1}{2}$ "  
 Sold per foot (specify length)




## Silicone

- Extruded from platinum cross-linked silicon
- Self-extinguishing and non-toxic
- Unaffected by sunlight, ozone, and ultraviolet rays
- Impervious to fungus and mildew; will not deteriorate under normal exposure
- Available in 100ft lengths


### S104\_100

AVAILABLE FINISHES: **D, W**  
 ANSI: **R0E156**  
 Minimum space between the door face and the stop is  $\frac{1}{16}$ "; maximum space is  $\frac{1}{4}$ "




### S109\_100

AVAILABLE FINISHES: **D, W**  
 ANSI: **R0E156**  
 Minimum space between the door face and the stop is  $\frac{1}{16}$ "; maximum space is  $\frac{3}{16}$ "




### S105\_100

AVAILABLE FINISHES: **D, W**  
 ANSI: **R0E156**  
 Minimum space between the door face and the stop is  $\frac{1}{16}$ "; maximum space is  $\frac{3}{8}$ "



### S52\_100

AVAILABLE FINISHES: **BL, W**  
 ANSI: **R0E154**  
 Minimum space between the door face and the stop is  $\frac{1}{16}$ "; maximum space is  $\frac{3}{8}$ "



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

**BL** (Black) **D** (Dark Brown) **W** (White)

800-824-3018 | [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)

Check the web site for the up-to-date catalog

Copyright © 2015-2021, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

**ASSA ABLOY**  
 Opening Solutions

Experience a safer  
 and more open world

## Kerf-In Weatherstrip (Cont.)


### PK52\_

AVAILABLE FINISHES: **BL, W**

ANSI: **ROG154**

AVAILABLE LENGTHS: **18', 20', 300'**

- Minimum space between the door face and the stop is  $\frac{1}{16}$ "; maximum space is  $\frac{3}{8}$ "

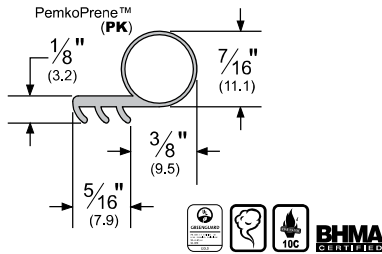


### P50\_

AVAILABLE FINISHES: **BL, W**

AVAILABLE LENGTHS: **17', 25', 250'**

- Minimum space between the door face and the stop is  $\frac{1}{16}$ "; maximum space is  $\frac{3}{16}$ "
- Thermoplastic elastomer formulation will not transmigrate; remains flexible to -60° F




### MAG349\_

AVAILABLE FINISHES: **D, W**

AVAILABLE LENGTHS: **37", 85", 96", 121"**

- Minimum space between the door face and the stop is  $\frac{3}{16}$ "; maximum space is  $\frac{7}{16}$ "
- Magnetic kerf-in weatherstrip features a magnetic strip encased by a UV-stable TPE cover
- Use for steel-faced door and wood frame applications
- Can be trimmed in the field and corner-mitered




## Magnetic Weatherstrip

### 2815\_M

AVAILABLE FINISHES: **C, D, G**

REPLACEMENT INSERT: **2815MAG**

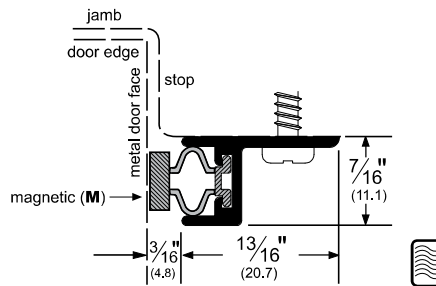

## Adhesive Perimeter Gasketing

For more information on these perimeter gasketing products, please see the Adhesive Gasketing section.


### S773\_

AVAILABLE FINISHES: **BL, D, GR, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 250', 500'**

ANSI: **ROE154, ROE155**

- Triple-fin design blocks light and sound from infiltrating a room
- Product designed as hospitality gasketing (see more hospitality products in the Hospitality Products section)
- Seal begins compressing at  $\frac{3}{8}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap




### S88\_

AVAILABLE FINISHES: **BL, C, D, GR, TAN, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 204', 510'**

ANSI: **ROE154, ROE155**

- Seal begins compressing at  $\frac{1}{4}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap
- Available with perforations for Behavioral Health applications. Substitute "P" in place of "S" to order this option.




### S44\_

AVAILABLE FINISHES: **BL, C, D, GR, W**

AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 204', 510'**

ANSI: **ROE154, ROE155**

- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at  $\frac{9}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap
- Available with perforations for Behavioral Health applications. Substitute "P" in place of "S" to order this option.



NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)  
Adhesive Gasketing Colors: **BL** (Black) **C** (Clear) **D** (Dark Brown) **GR** (Light Gray) **TAN** (Tan) **W** (White)

**ASSA ABLOY**  
Opening Solutions

Experience a safer  
and more open world

800-824-3018 | [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)

Check the web site for the up-to-date catalog

Copyright © 2015-2021, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

## Adhesive Perimeter Gasketing (Cont.)


For more information on these perimeter gasketing products, please see the Adhesive Gasketing section.

### S442\_

AVAILABLE FINISHES: **BL, D, W**  
 AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**

ANSI: **R0E154, R0E155**


- Fits flush into corner
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



### S776\_

AVAILABLE FINISHES: **BL**  
 AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30'**  
 ANSI: **R0E154, R0E155**

- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at  $\frac{3}{8}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap




### S771x6\_

AVAILABLE FINISH: **BL**  
 AVAILABLE LENGTHS: **7', 8', 10', 17', 18', 20', 21', 25'**

ANSI: **R0E154, R0E155**


- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



### S77\_

AVAILABLE FINISHES: **C, BL, D, W**  
 AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**  
 ANSI: **R0E154, R0E155**


- Designed for hollow metal and wood meeting stile applications.
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



### PK33\_

AVAILABLE FINISHES: **BL, D, W**  
 AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**  
 ANSI: **R0G154, R0G155**


- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at  $\frac{3}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



### PK55\_

AVAILABLE FINISHES: **BL, D, W**  
 AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**  
 ANSI: **R0G154, R0G155**


- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at  $\frac{3}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## MicroShield® Antimicrobial Adhesive Gasketing


### AM44\_

AVAILABLE FINISHES: **BL, C, D, W**  
 AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**  
 ANSI: **R8E154, R0E155**



### AM88\_

AVAILABLE FINISHES: **BL, C, D, W**  
 AVAILABLE LENGTHS: **17', 18', 20', 21', 25', 30', 510'**  
 ANSI: **R8E154, R0E155**



#### NOTES FOR ALL ADHESIVE GASKETING:

Storage and shelf life: All adhesive gaskets have a limited shelf life. This product must be installed within 6 months of purchase and must be stored between 50°F and 100°F. For further notes/details, please see Adhesive Gasketing section.

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

Adhesive Gasketing Colors: **BL** (Black) **C** (Clear) **D** (Dark Brown) **GR** (Light Gray) **W** (White)

800-824-3018 | [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)

Check the web site for the up-to-date catalog

Copyright © 2015-2021, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

**ASSA ABLOY**  
 Opening Solutions

Experience a safer  
 and more open world


## Excessive Gap Perimeter Solution

### XG90KIT

- Brings fire-rated doors with excessive vertical and head gaps back into spec - up to 3/8"
- UL Classified for 90-minutes
- Kit includes both products shown below


### HSS20XGxS773

- Pressure sensitive adhesive backing
- AVAILABLE FINISH: **BL, W**

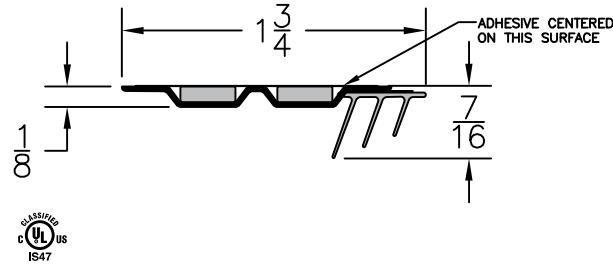

### XG900

- 16ga galvanized steel
  - Can be screw applied or welded to metal frame if welded, specify with "no holes" for clean appearance
  - Can be field painted to match the frame
- AVAILABLE FINISH: **SP, SPBSP, SPWSP, SP10BE**




## Interlock Weatherstrip For Wood Windows

### Corrugated Rib Strips

- Corrugated rib strips are made from .015" spring bronze (B) or .0172" galvanized steel (Z)
- 4C and 6C are only available in 96" lengths


4C (1 3/8" width)      6C (1 7/8" width)  
 AVAILABLE FINISHES: **B, Z**      AVAILABLE FINISH: **Z**

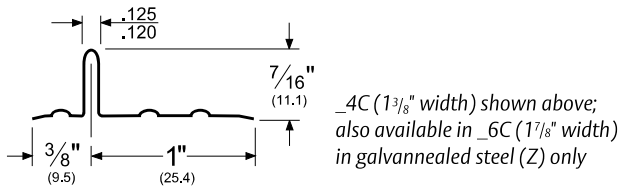

### Flat Hooks

- 10 Flat hooks are made from .026" spring bronze (B) or .0172" galvanized steel (Z)


10  
 AVAILABLE FINISHES: **B, Z**  
 AVAILABLE LENGTHS: **96"**



### Plain Rib Strips

- Plain rib strips are made from .015" spring bronze (B) or .0172" galvanized steel (Z)

2P (1" width)      4P (1 3/8" width)  
 AVAILABLE FINISHES: **B, Z**      AVAILABLE FINISHES: **B, Z**

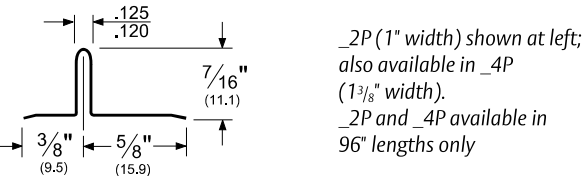

NOTE: Products shown in this section may not be drawn to scale.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

**10BE** (Satin Bronze Powder) **A** (Mill Finish Aluminum) **B** (Bronze) **BSP** (Black Suede Powder)  
**D** (Dark Bronze Anodized Aluminum) **SP** (Galvanized Steel) **WSP** (White Suede Powder) **Z** (Galvanized Steel)

800-824-3018 | [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)

Check the web site for the up-to-date catalog

**ASSA ABLOY**  
 Opening Solutions

Experience a safer  
 and more open world


## Interlock Weatherstrip For Wood Doors

- Fasteners available at additional cost

### Liner Strip

- Made from .008" spring bronze (B)


**\_30**  
AVAILABLE FINISH: **B**  
AVAILABLE LENGTHS: **96"**



### Lock Strip

- Made from .008" spring bronze (B)


**\_331**  
AVAILABLE FINISH: **B**  
AVAILABLE LENGTHS: **6", 96"**




### "L" Metal

- Bronze or zinc-plated wafer head drive screws available for \_41M (sold separately)

**\_41M**  
AVAILABLE FINISHES: **B, Z**  
AVAILABLE LENGTHS: **96"**



**\_43**  
AVAILABLE FINISH: **B**  
AVAILABLE LENGTHS: **96"**




## Cushion/Spring Weatherstrip for Wood or Metal Doors and Windows


### Spring Bronze - Wood Doors/Windows

- Spring bronze weatherstrip fits wood doors and wood casement windows
- Made from .008" hemmed spring bronze/brass (B)
- Nails should be approximately 1 1/2" on center (sold separately)


**\_70C-100**  
AVAILABLE FINISH: **B**  
AVAILABLE LENGTHS: **100'**




**\_70D-100**  
AVAILABLE FINISH: **B**  
AVAILABLE LENGTHS: **100'**



**\_70E-100**  
AVAILABLE FINISH: **B**  
AVAILABLE LENGTHS: **100'**



**\_70F-100**  
AVAILABLE FINISH: **B**  
AVAILABLE LENGTHS: **100'**




### P51B17

P51B17 is 17 feet of \_70C  
Packaged with nails


## Cushion ("V") - Wood or Metal Doors

- Cushion weatherstrip fits wood or metal doors
- Made from .008" hemmed spring bronze/brass (B)
- Nails should be approximately 3" on center (sold separately)
- Gap coverage is 1/8" minimum to 3/16" maximum


**\_73**  
AVAILABLE FINISH: **B**  
AVAILABLE LENGTHS: **96"**



**\_74**  
AVAILABLE FINISH: **B**  
AVAILABLE LENGTHS: **96"**



**\_75**  
AVAILABLE FINISH: **B**  
AVAILABLE LENGTHS: **96"**



## Fasteners for Cushion, Spring and Interlock Weatherstrip

- Fasteners for cushion, spring, and interlock weatherstrip are sold separately unless otherwise specified

**NL1678\_**  
AVAILABLE FINISHES: **BL, BP, Z**  
For Wood: #16 x 7/16" flat head nail



**NL1634\_**  
AVAILABLE FINISHES: **BB, SS**  
For Wood: #16 x 3/4" flat head nail



**NL13516\_**  
AVAILABLE FINISHES: **BP, Z**  
For Metal: #13 x 5/16" wafer head drive screw




# Privacy Seals for Sliding Doors

## PEMKOSFSET1

- Will seal gaps 1/8 to 3/8" for barn door sliding hardware
- Works with any sliding door hardware
- Requires 1/2" frame to keep the gasket from marring the wall


369




## PEMKOSFSET2

- Will seal gaps 1/8 to 3/8" for barn door sliding hardware
- Works with any sliding door hardware
- Requires 1/2" frame to keep the gasket from marring the wall
- Includes a surface mounted bottom seal


369




S773



S773



18061\_NB



Standard Kit Sizes		
Finish	Product	Color
C	369C S773GR	Clear Anodized Gray
D	369D S773BL	Dark Bronze Anodized Black
PW	369C S773PW	Clear Anodized White

Standard Kit Sizes		
Finish	Product	Color
C	369C S773GR 18061CNB	Clear Anodized Gray Clear Anodized, Gray Brush
D	369D S773BL 18061DNB	Dark Bronze Anodized Black Dark Bronze Anodized, Black Brush
PW	369C S773PW 18061PWNB	Clear Anodized White Painted White

**ASSA ABLOY**  
Opening Solutions


Experience a safer  
and more open world

800-824-3018 | [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)  
Check the web site for the up-to-date catalog

Copyright © 2015-2021, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

# SiliconSeal Adhesive-Backed Fire/Smoke Gasketing


- SiliconSeal is extruded from high-temperature silicone; effective between -58°F and 450°F
- Self-extinguishing and non-toxic; unaffected by sunlight, ozone, and ultraviolet rays
- Impervious to fungus and mildew; will not deteriorate under normal exposure
- Meets FAR 25.853 Airworthiness Standards for Compartment Interiors

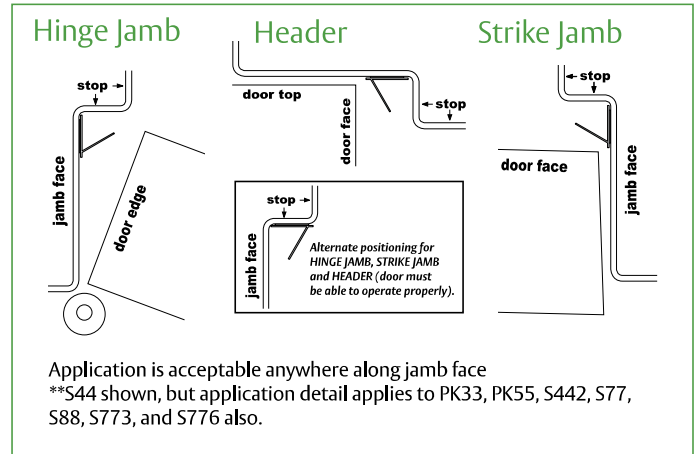

## S44\_

AVAILABLE FINISHES: **BL, C, D, GR, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 204', 510'  
 ANSI: **R0E154, R0E155**


- Designed for tighter frames
- Demonstrates extremely low closing force
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## S442\_

AVAILABLE FINISHES: **BL, D, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 510'  
 ANSI: **R0E154, R0E155**


- Fits flush into corner
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap in either direction



## S77\_

AVAILABLE FINISHES: **BL, C, D, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 204', 500'  
 ANSI: **R0E154, R0E155**


- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## S88\_

AVAILABLE FINISHES: **BL, C, D, GR, TAN, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 204', 510'  
 ANSI: **R0E154, R0E155**


- Seal begins compressing at  $\frac{1}{4}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## S773\_

AVAILABLE FINISHES: **BL, D, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 250', 500'  
 ANSI: **R0E154, R0E155**


- Triple-fin design effectively blocks light and sound from infiltrating a room
- Seal begins compressing at  $\frac{3}{8}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## S776\_

AVAILABLE FINISHES: **BL**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30'  
 ANSI: **R0E154, R0E155**

- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at  $\frac{3}{8}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)  
**BL** (Black) **C** (Clear) **D** (Dark Brown) **GR** (Light Gray) **TAN** (Tan) **W** (White)

**ASSA ABLOY**  
 Opening Solutions

Experience a safer  
 and more open world

800-824-3018 | [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)  
 Check the web site for the up-to-date catalog


Copyright © 2015-2021, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.  
 Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

# PemkoPrene® Adhesive-Backed Fire/Smoke Gasketing

## PK33\_

AVAILABLE FINISHES: **BL, D, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 510'  
 ANSI: **R0G154, R0G155**


- Designed for tighter frames
- Demonstrates extremely low closing force
- Seal begins compressing at  $\frac{3}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## PK55\_

AVAILABLE FINISHES: **BL, D, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 510'  
 ANSI: **R0G154, R0G155**

- Designed for tighter frames
- Demonstrates extremely low closing force
- Seal begins compressing at  $\frac{3}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap





# SiliconSeal Adhesive-Backed Meeting Stile Gasketing

- Excellent resistance to compression set, particularly at elevated temperatures and for extended periods of time
- Outstanding ozone resistance rating
- Smoke tested in accordance with UL1784-01; meets the requirements of NFPA 105 "Standard for the Installation of Smoke Door Assemblies and Other Opening Protectives"

## S771\_


AVAILABLE FINISHES: **BL, C, D, GR, W**  
 AVAILABLE LENGTHS: 7', 8', 9', 10'  
 ANSI: **R0E154, R0E155, R0E754, R0E755**

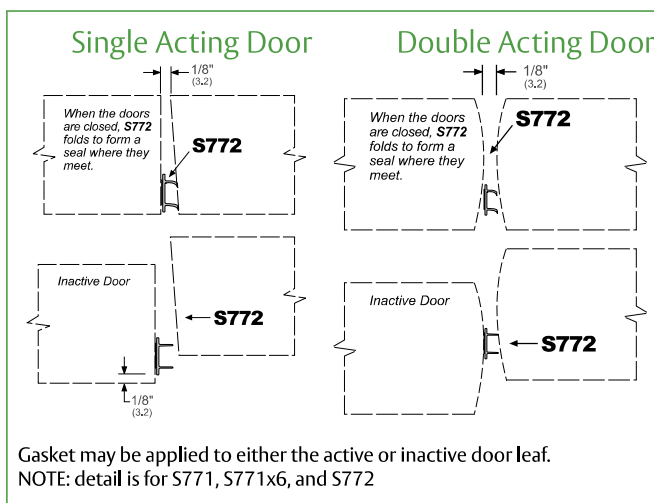

## S771x6\_


AVAILABLE FINISHES: **BL**  
 AVAILABLE LENGTHS: 7', 8', 9', 10'  
 ANSI: **R0E154, R0E155, R0E754, R0E755**

- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## S772\_

AVAILABLE FINISHES: **BL, C, D, GR, W**  
 AVAILABLE LENGTHS: 7', 8', 9', 10'  
 ANSI: **R0E154, R0E155, R0E754, R0E755**



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)  
**BL** (Black) **C** (Clear) **D** (Dark Brown) **GR** (Light Gray) **W** (White)

800-824-3018 | [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)  
 Check the web site for the up-to-date catalog

Copyright © 2015-2021, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.  
 Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

**ASSA ABLOY**  
 Opening Solutions

Experience a safer  
 and more open world




# MicroShield® Antimicrobial Gasketing

- Extruded from high-temperature silicone with MicroShield®, a silver-based antimicrobial additive
- Effective between -58°F and 450°F
- Adhesive Backed
- Self-extinguishing and non-toxic
- Unaffected by sunlight, ozone and ultraviolet rays
- Exceeds the requirements for Antimicrobial Test JIS-Z-2801


## AM44\_

AVAILABLE FINISHES: **BL, C, D, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 510'  
 ANSI: R0E154, R0E155



## AM88\_

AVAILABLE FINISHES: **BL, C, D, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 510'  
 ANSI: R0E154, R0E155



MicroShield®  
 As part of their promise to provide innovative solutions to their customers, certain ASSA ABLOY Group brands offer the MicroShield® technology, a silver-based antimicrobial additive designed to inhibit the growth of bacteria.



MicroShield® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company.

# Hot Smoke Seal/SiliconSeal Combination Fire/Smoke Sealing

- Chemically inert, highly stable, expandable graphite strip
- Tested and proven in positive pressure conditions to withstand both hot smoke and hot gasses, resulting in longer integrity of the door assembly
- More economical to use than specially modified doors in "tested assembly only" classifications
- Hot Smoke Seal can be painted to blend in with the finish of a frame
- Will not degrade from carbon dioxide and ozone like many competitive intumescent from other manufacturers
- Unaffected by moisture and will not break down like fiber-based or cellulose-based products

## HSS1000\_


AVAILABLE FINISHES: Graphite (no finish code), **W**  
 AVAILABLE LENGTHS: 7', 8', 10', 18', 21', 24'  
 ANSI: R0P124

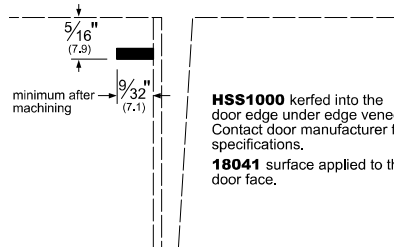

**HSS1000** kerfed into the door edge under edge veneer. Contact door manufacturer for specifications.  
**18041** surface applied to the door face.

## HSS2000\_


AVAILABLE FINISHES: Graphite (no finish code), **W**  
 AVAILABLE LENGTHS: 7', 8', 10', 18', 21', 24'  
 ANSI: R0P154



## HSS2000xS44\_

AVAILABLE FINISHES: **BL, C, D, GR, W**  
 AVAILABLE LENGTHS: 18', 20', 21', 24'  
 20' lengths can be supplied in 4-0 x 8-0 or 6-0 x 7-0. Specify when ordering  
 ANSI: R0U154, R0U155

- Compresses to seal a gap up to 1/8"




## Notes For All Adhesive Gasketing:

Storage and shelf life: All adhesive gaskets have a limited shelf life. This product must be installed within 6 months of purchase and must be stored between 50°F and 100°F.  
 Before installing: Thoroughly clean the frame to remove grease, dust or cleanser build-up (cleansing towelettes are included with product). Painted frame surface must be completely dry. Some hospital environments have wax or anti-bacterial cleanser build-up. As an alternative or substitute cleanser, use isopropyl (rubbing) alcohol. Note: Mineral spirits or other petroleum based cleaning products should NOT be used.

## HSS2000xS88\_

AVAILABLE FINISHES: **BL, C, D, GR, TAN, W**  
 AVAILABLE LENGTHS: 18', 20', 21', 24'  
 20' lengths can be supplied in 4-0 x 8-0 or 6-0 x 7-0. Specify when ordering  
 ANSI: R0U154, R0U155

- Compresses to seal a gap up to 1/8"



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)  
**BL** (Black) **C** (Clear) **D** (Dark Brown) **GR** (Light Gray) **TAN** (Tan) **W** (White)

**ASSA ABLOY**  
 Opening Solutions

Experience a safer  
 and more open world

800-824-3018 | [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)

Check the web site for the up-to-date catalog


Copyright © 2015-2021, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

# SiliconSeal Adhesive Gasketing

## S44\_

AVAILABLE FINISHES: **BL, C, D, GR, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 510'  
 ANSI: **ROE154, ROE155**


- Designed for tighter frames
- Demonstrates extremely low closing force
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## S88\_

AVAILABLE FINISHES: **BL, C, D, GR, TAN, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 204', 510'  
 ANSI: **ROE154, ROE155**


- Seal begins compressing at  $\frac{1}{4}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## S442\_


AVAILABLE FINISHES: **BL, C, D, GR, TAN, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 204', 510'  
 ANSI: **ROE154, ROE155**

- Seal Fits flush into corner
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap in either direction





## S771\_

AVAILABLE FINISHES: **BL, C, D, GR, W**  
 AVAILABLE LENGTHS: 7', 8', 9', 10'  
 ANSI: **ROE154, ROE155, ROE754, ROE755**



## S772\_


AVAILABLE FINISHES: **BL, C, D, GR, W**  
 AVAILABLE LENGTHS: 7', 8', 9', 10'  
 ANSI: **ROE154, ROE155, ROE754, ROE755**

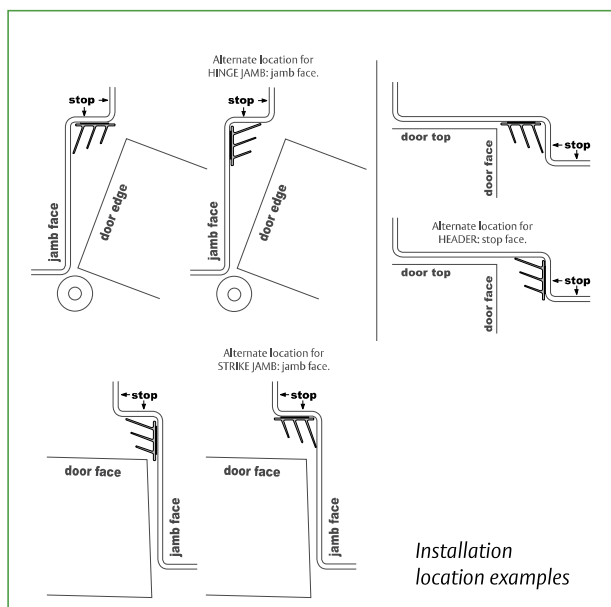

## S773\_

AVAILABLE FINISHES: **BL, D, GR, W**  
 AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 250'  
 ANSI: **ROE154, ROE155**


- Triple-fin design effectively blocks light and sound from infiltrating a room
- Seal begins compressing at  $\frac{3}{8}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## S776\_

AVAILABLE FINISHES: **BL**  
 AVAILABLE LENGTHS: 17', 18', 20', 21'  
 ANSI: **ROE154, ROE155**


- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at  $\frac{3}{8}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



## S771x6\_

AVAILABLE FINISHES: **BL, C**  
 AVAILABLE LENGTHS: 7, 8, 9', 10, 17, 18, 20, 21, 25  
 ANSI: **ROE154, ROE155, ROE754, ROE755**

- Designed for hollow metal and wood meeting stile applications
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)  
**BL** (Black) **C** (Clear) **D** (Dark Brown) **GR** (Light Gray) **TAN** (Tan) **W** (White)

800-824-3018 | [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)  
 Check the web site for the up-to-date catalog

Copyright © 2015-2021, ASSA ABLOY Accessories and Door Controls Group, Inc., an ASSA ABLOY Group company. All rights reserved.  
 Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

**ASSA ABLOY**  
 Opening Solutions

Experience a safer  
 and more open world