



DOOR EDGE GUARDS - LATCH-SIDE DOOR EDGE - DL, DLT, DLM & DLMT

Protects exposed latch side of door when open.

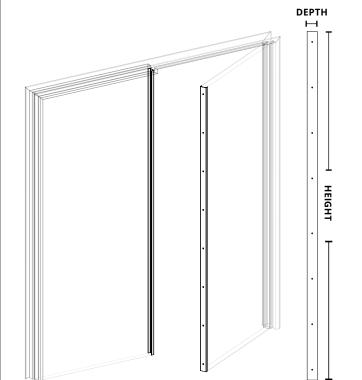







SPECIFICATIONS:

Standard Material: 20 gauge cold rolled steel Optional Astragal Material: 18 gauge cold rolled steel

Standard Finish: Mineral bronze powder coat

Mounting: Countersunk mounting holes. #8 x 7/8" flathead Phillips head screws.

Height:

Standard: 80" Maximum: 108"

Wing Width: 1" Door Depth: 1-34"

ADDITIONAL OPTIONS:

Optional Construction:

Wing Widths from .27" - 2", Door Thickness from 1" - 4"

Optional Materials:

18 ga cold rolled steel

18 or 20 ga US32D stainless steel

18 or 20 ga zinc-plated steel

18 or 20 ga galvanneal steel

Cutouts: Available at additional cost. See page 3 & 4.

FIRE-RATING:

Intertek - Warnock Hersey listed for up to 90 min on the DL models. Marked on request only.

Tested to: ASTM E152-81a, UBC 7-2, NFPA 252, UL 10B, UL 10C, CAN / ULC S104

SEE PAGES 2 FOR EDGE ANGLE & HANDING GUIDE

QTY	QTY		PROFILE		EDGE ANGLE		(ASTRAGAL)		DOOR HANDING		MATERIAL	
	DL	((Three-Sided)		9 (Square Pair)		(None)		L (Left Hand)		(Cold-Rolled Steel)	- [
			M (Mortised Three-Sided)		8 (Beveled Pair)		A (Astragal)		R (Right Hand)		E (Zinc-Plated)	_
			T (Two-Sided)		7 (Double Egress)				LR (Left Hand Reverse)		G (Galvannealed Steel)	
			MT (Mortised Two-Sided)		5 (Square Single)				RR (Right Hand Reverse)		S (Stainless Steel)	
					4 (Beveled Single - No Astragal)							
					3 (Beveled Single - Inactive Inswing)							
					2 (Beveled Single - Active Outswing)							

EIGHT		FINISH	-	
	В	(Bronze)	-	
	АВ	(AMS Beige)		
	SB	(SC Beige)		
	s	(Sand)		
	G	(Gray)		
	SI	(Silver)		
	w	(White)		
	ВК	(Black)		
	FB	(Flat Black)		*
	ВА	(Brass)		٧
	,			

-			(OPTIONS)		
-		WH* (WH Fire-Rated Marking)			
		LL	(Leadlined)		
		н	(18 ga Material)		
		(Torx Screws)			
		(No Holes)			
		Cut-Outs - Fill out pg. 3 or 4			
			Wing Width		
			Door Thickness		
'	*DLM, DLMT, DLT cannot be fire-rated				

Leadlining only available on edges with astragals & cannot be fire-rated.




Approval Signature is required. Fill out 1 form per order.

800-554-6077 sales@activarcpg.com www.activarcpg.com


Project: Distributor: Approved By: Contractor: Date: **Architect:** Scale: N/A Pages: 1 of 4 Item #:

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

INSWING DOORS

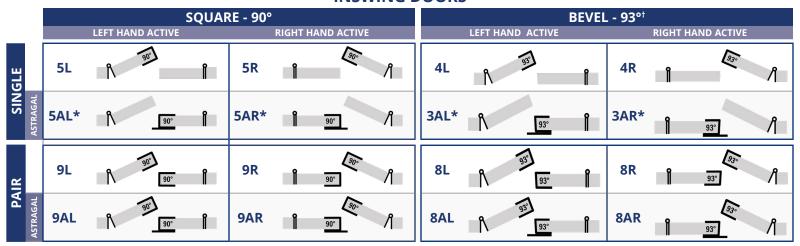

OUTSWING DOORS

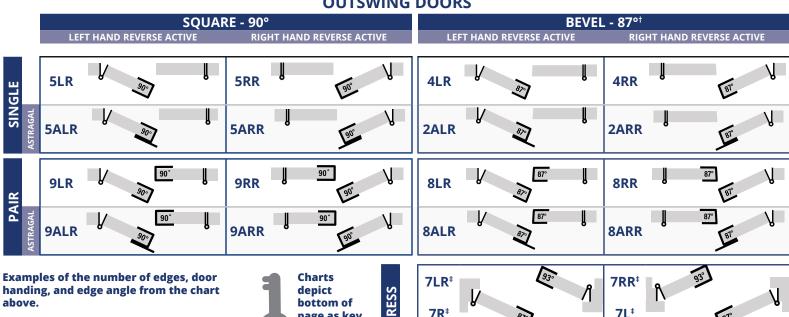

- t Bevel measured on angle of "Key Side".
- * Inswing doors take an astragal on the inactive side. Standard active inswing leaves cannot have astragal.
- ‡ Double Egress Handing is determined by desired hardware. See page 4 & 5 for cutout examples.



